


转轴 ◀ 张紧型/止转型




张紧型	止转型	材质		表面处理	张紧型	
		国标	相当		附件	附件材质
AAJ01	AAK01	45	S45C	发黑	挡圈2个	弹簧钢
AAJ02	AAK02					SUS304
AAJ11	AAK11	0Cr18Ni9	SUS304	—		SUS304

张紧型
AAJ01/02/11

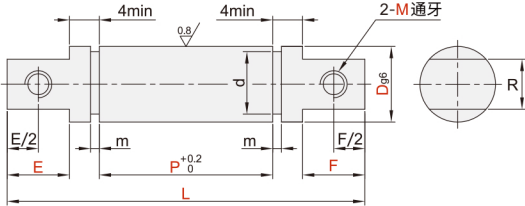

止转型
AAK01/02/11

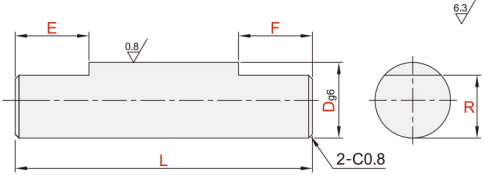

■圆度·直线度·垂直度·同轴度，请参阅转轴产品简介。

张紧型

型号	最小单位1				M	R	d	m			
代码	D _{φ6}	L	E-F	P							
AAJ01	8	-0.005	18~400	8~30	2~370	3	7	7	+0.09 0	0.9	+0.1 0
	10	-0.014	25~500	10~30	4~470	4	8	9.6	0		
	12	-0.006	25~500			4 5	9	11.5	0		
AAJ02	15	-0.017	25~600	15~50	8~550	4 5 6	12	14.3	0	-0.11	1.15
AAJ11	17	-0.017	35~600			5 6 8	13	16.2	0		
20	-0.007	35~600	6 8 10			16	19	0	1.35		
25	-0.020	45~600	8 10 12	20	23.9	0	-0.21	1.65			
30	-0.020	55~600		25	28.6						

止转型

型号	最小单位0.1			R
代码	D _{φ6}	L	E-F	
AAK01	6	-0.004 -0.012	18.0~300.0	4~5
	8	-0.005	18.0~400.0	5~7
	10	-0.014	18.0~500.0	7~9
AAK02	12		25.0~600.0	9~11
AAK11	13		25.0~700.0	10~12
15	-0.006	2.0~54.0		12~14
16	-0.017		13~15	
17		35.0~800.0	14~16	
18			15~17	
20		45.0~800.0	15~18	
22	-0.007		2.0~90.0	17~20
25	-0.020			20~23
30		55.0~800.0	25~28	

■L>600时，两端加工部分可能会产生误差(最大偏差约1°)。

可选加工项

代码	技术说明																									
LC	变更L尺寸公差 	选型方法 LC ■L<400变更为L±0.05 L≥400变更为L±0.1																								
LA() LB()	增加平面 增加1处平面LA() 增加2处平面LB() 	选型方法 LA10-G3 选型方法 LB10-J3-Y10-X3 ■最小单位1 ■指定G·J·X时,须为50以下 <table border="1"> <tr><th>D</th><th>H</th></tr> <tr><td>6~17</td><td>1</td></tr> <tr><td>18~40</td><td>2</td></tr> </table>	D	H	6~17	1	18~40	2																		
D	H																									
6~17	1																									
18~40	2																									
KE()	增加扳手槽 	选型方法 KE10 ■最小单位1 <table border="1"> <tr><th>D</th><th>W</th><th>V_r</th></tr> <tr><td>6</td><td>5</td><td rowspan="6">6</td></tr> <tr><td>8</td><td>7</td></tr> <tr><td>10</td><td>8</td></tr> <tr><td>12~13</td><td>10</td></tr> <tr><td>15~16</td><td>13</td></tr> <tr><td>17~18</td><td>14</td></tr> <tr><td>20~22</td><td>17</td><td rowspan="2">12</td></tr> <tr><td>25</td><td>22</td></tr> <tr><td>30</td><td>27</td><td>16</td></tr> </table>	D	W	V _r	6	5	6	8	7	10	8	12~13	10	15~16	13	17~18	14	20~22	17	12	25	22	30	27	16
D	W	V _r																								
6	5	6																								
8	7																									
10	8																									
12~13	10																									
15~16	13																									
17~18	14																									
20~22	17	12																								
25	22																									
30	27	16																								
MA() MB()	增加挡圈槽 	选型方法 MA10-MB10 ■最小单位1 ■MA(MB)=4~L/2 ■挡圈槽尺寸见转轴产品简介。 ■不适用张紧型。																								
MD	取消挡圈槽	选型方法 MD ■取消挡圈槽。 ■仅适用张紧型。																								



请按图示订货

AAJ01-D8-L18-E8-F10-P3-M3

型号	L	E-F	P	M	
AAJ01	8	18~400	8~30	2~370	3



交期Delivery

6天 发货

○本产品发货时间不含周日