


转轴 ◀ 一端台阶型/一端内螺纹型·标准型



| 代码 | 类型 | 公差 | | 材质 | | 表面处理 |
|-------|-------------------|----|----|----------|-------------------|-------|
| | | D | P | 国标 | 相当 | |
| ABD01 | 一端 内螺纹型 标准型 | g6 | g6 | 45 | S45C | 发黑 |
| ABD02 | | | | 0Cr18Ni9 | SUS304 | 无电解镀镍 |
| ABD16 | | | | 35CrMo | SCM435硬度28-33 HRC | 无电解镀镍 |
| ABD22 | | | | 45 | S45C | 发黑 |
| ABD41 | | | | 0Cr18Ni9 | SUS304 | — |
| ABD46 | | | | 45 | S45C | 无电解镀镍 |
| ABD62 | | h7 | h7 | 45 | S45C | 发黑 |
| ABD66 | | | | 0Cr18Ni9 | SUS304 | — |
| ABD81 | | | | 45 | S45C | 无电解镀镍 |
| ABD82 | | | | 0Cr18Ni9 | SUS304 | — |
| ABD86 | | | | 45 | S45C | 发黑 |
| ABD86 | | | | 0Cr18Ni9 | SUS304 | — |

| D:P | g6 | h7 | h9 |
|---------|------------------|-------------|-------------|
| 2~3 | -0.002 -0.008 | 0 -0.010 | 0 -0.025 |
| 3.1~6 | -0.004 -0.012 | 0 -0.012 | 0 -0.030 |
| 6.1~10 | -0.005 -0.014 | 0 -0.015 | 0 -0.036 |
| 10.1~18 | -0.006 -0.017 | 0 -0.018 | 0 -0.043 |
| 18.1~30 | -0.007 -0.020 | 0 -0.021 | 0 -0.052 |
| 30.1~50 | -0.009 -0.025 | 0 -0.025 | 0 -0.062 |

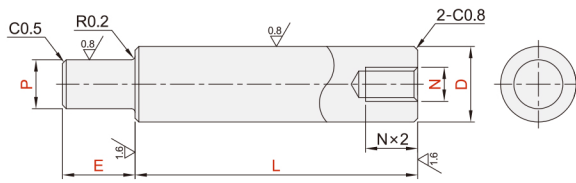

■圆度、直线度、垂直度、同轴度，请参阅转轴产品简介。

■Dg6

| 型号 | 最小单位0.1 | | 最小单位1 | N | |
|----------------------------------|---------|-------------|-------------|----------------|------------------|
| 代码 | Dg6 | L | P | | |
| ABD01 ABD02 ABD16 ABD22 | 6 | 18.0~300.0 | 2 ≤ P < D | 3 4 | |
| | 8 | 18.0~400.0 | | 3 4 5 6 | |
| | 10 | 18.0~500.0 | | 4 5 6 8 | |
| | 12 | 25.0~600.0 | | 5 6 8 | |
| | 13 | | | 5 6 8 | |
| | 15 | | | 5 6 8 10 | |
| | 16 | | 5 6 8 10 12 | | |
| | 17 | 35.0~800.0 | 4 ≤ P < D | 5 6 8 10 12 | |
| | 18 | | | 5 6 8 10 12 16 | |
| | 20 | | | 5 6 8 10 12 16 | |
| | 22 | | | 5 6 8 10 12 16 | |
| | 25 | | | 5 6 8 10 12 16 | |
| | 30 | | | 8 10 12 16 20 | |
| | ABD22 | 35 | 65.0~800.0 | 8 ≤ P < D | 8 10 12 16 20 24 |
| | | 40 | | | 12 16 20 24 30 |
| | | 45 | | | 16 20 24 30 |
| 50 | | 16 20 24 30 | | | |
| 50 | | 16 20 24 30 | | | |

■Dh7

| 型号 | 最小单位0.1 | | 最小单位1 | N | |
|----------------|---------|-------------|----------------|------------------|----------------|
| 代码 | Dh7 | L | P | | |
| ABD41 ABD46 | 6 | 18.0~300.0 | 2 ≤ P < D | 3 4 | |
| | 8 | 18.0~400.0 | | 3 4 5 6 | |
| | 10 | 18.0~500.0 | | 4 5 6 | |
| | 12 | 25.0~600.0 | | 5 6 8 | |
| | 15 | | | 5 6 8 10 | |
| | 16 | | | 5 6 8 10 12 | |
| | 17 | | 5 6 8 10 12 16 | | |
| | 18 | 35.0~800.0 | 4 ≤ P < D | 5 6 8 10 12 16 | |
| | 20 | | | 5 6 8 10 12 16 | |
| | 22 | | | 5 6 8 10 12 16 | |
| | 25 | | | 8 10 12 16 20 | |
| | 30 | | | 8 10 12 16 20 24 | |
| | 35 | | | 12 16 20 24 30 | |
| | ABD46 | 40 | 65.0~800.0 | 8 ≤ P < D | 12 16 20 24 30 |
| | | 45 | | | 16 20 24 30 |
| | | 50 | | | 16 20 24 30 |
| 50 | | 16 20 24 30 | | | |
| 50 | | 16 20 24 30 | | | |

■Dh9

| 型号 | 最小单位0.1 | | 最小单位1 | N | |
|-------------------------------------------|---------|-------------|----------------|------------------|----------------|
| 代码 | Dh9 | L | P | | |
| ABD62 ABD66 ABD81 ABD82 ABD86 | 6 | 18.0~300.0 | 2 ≤ P < D | 3 4 | |
| | 8 | 18.0~400.0 | | 3 4 5 6 | |
| | 10 | 18.0~500.0 | | 4 5 6 | |
| | 12 | 25.0~600.0 | | 5 6 8 | |
| | 15 | | | 5 6 8 10 | |
| | 16 | | | 5 6 8 10 12 | |
| | 17 | | 5 6 8 10 12 16 | | |
| | 18 | 35.0~800.0 | 4 ≤ P < D | 5 6 8 10 12 16 | |
| | 20 | | | 5 6 8 10 12 16 | |
| | 22 | | | 5 6 8 10 12 16 | |
| | 25 | | | 8 10 12 16 20 | |
| | 30 | | | 8 10 12 16 20 24 | |
| | 35 | | | 12 16 20 24 30 | |
| | ABD86 | 40 | 65.0~800.0 | 8 ≤ P < D | 12 16 20 24 30 |
| | | 45 | | | 16 20 24 30 |
| | | 50 | | | 16 20 24 30 |
| 50 | | 16 20 24 30 | | | |
| 50 | | 16 20 24 30 | | | |

■可选加工项

| 代码 | 技术说明 | | | | | | | | | | | | | | | | |
|--------------|----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---|------|---|-------|---|----|---|---|----|---|---|----|----|---|
| LC | 变更L尺寸公差 | 选型方法 LC ■L<400变更为L±0.05 L≥400变更为L±0.1 | | | | | | | | | | | | | | | |
| LA() LB() | 增加1处平面LA() 增加2处平面LB() | 选型方法 LA10-G3 选型方法 LB10-J3-Y10-X3 ■最小单位1 ■指定G·J·X时,须为50以下 <table border="1"> <tr><th>D</th><th>H</th></tr> <tr><td>6~17</td><td>1</td></tr> <tr><td>18~40</td><td>2</td></tr> <tr><td>50</td><td>3</td></tr> </table> | D | H | 6~17 | 1 | 18~40 | 2 | 50 | 3 | | | | | | | |
| D | H | | | | | | | | | | | | | | | | |
| 6~17 | 1 | | | | | | | | | | | | | | | | |
| 18~40 | 2 | | | | | | | | | | | | | | | | |
| 50 | 3 | | | | | | | | | | | | | | | | |
| KB() KC() | 增加1处键槽KB() 增加2处键槽KC() | 选型方法 KB50-S10 选型方法 KC50-C8-F40-T10 ■最小单位1 ■指定S·T·C时,须为100以下 ■键槽详情见转轴产品简介。 ■需要3处键槽时,请同时选择KB与KC | | | | | | | | | | | | | | | |
| PA() | 增加轴端键槽(仅P部) | 选型方法 PA10 ■最小单位1 ■PA≥50, PA≥E, P≤5不适用 ■键槽详情见转轴产品简介。 | | | | | | | | | | | | | | | |
| KD() | 增加开口凸轮用槽 | 选型方法 KD10 ■最小单位1 ■适用于右表D规格 <table border="1"> <tr><th>D</th><th>d</th><th>V2</th></tr> <tr><td>6</td><td>5</td><td>4</td></tr> <tr><td>8</td><td>7</td><td>4</td></tr> <tr><td>10</td><td>8</td><td>5</td></tr> <tr><td>12</td><td>10</td><td>5</td></tr> </table> | D | d | V2 | 6 | 5 | 4 | 8 | 7 | 4 | 10 | 8 | 5 | 12 | 10 | 5 |
| D | d | V2 | | | | | | | | | | | | | | | |
| 6 | 5 | 4 | | | | | | | | | | | | | | | |
| 8 | 7 | 4 | | | | | | | | | | | | | | | |
| 10 | 8 | 5 | | | | | | | | | | | | | | | |
| 12 | 10 | 5 | | | | | | | | | | | | | | | |
| MA() MB() | 增加挡圈槽(附带挡圈) | 选型方法 MA10—MB10 ■最小单位1 ■MA(MB)=4~L/2 ■挡圈槽尺寸见转轴产品简介。 | | | | | | | | | | | | | | | |



请按图示订货

■ABD01-D6-L200-E3-P5-N3

| 型号 | | L | E | P | N |
|-------|---|--------|---------|-------|-----|
| 代码 | D | | | | |
| ABD01 | 6 | 18~300 | 1≤E≤P×6 | 2≤P<D | 3 4 |



交期Delivery

6天 发货

○本产品发货时间不含周日