


转轴 ◀ 带键槽型/直杆型



代码	类型	D公差	材质		表面处理
			国标	相当	
AAE01	带键槽型	g6	45	S45C	发黑
AAE02					无电解镀锌
AAE11					-
AAE31		h7	45	S45C	发黑
AAE32					无电解镀锌
AAE41					-
AAE61	h9	45	S45C	发黑	
AAE62				无电解镀锌	

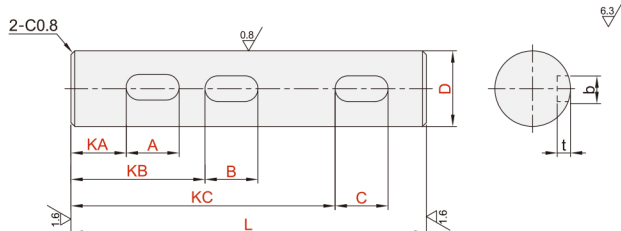

■圆度、直线度、垂直度间轴度请参阅转轴产品简介。
 ■键槽尺寸请参阅转轴产品简介。

型号		L		键槽① KA-A	键槽② KB-B	键槽③ KC-C
代码	Dg6	最小单位0.1	最小单位1			
AAE01	6	-0.004 -0.012	18.0~300.0	Ka≥0 b≤A≤100	Kd≥0 b≤B≤100	Kc≥0 b≤C≤100
	8	-0.005	18.0~400.0			
	10	-0.014	18.0~500.0			
	12		25.0~600.0			
	13		25.0~600.0			
15	-0.006	25.0~700.0				
16	-0.017	25.0~800.0				
AAE02	17		35.0~800.0			
AAE11	18		35.0~800.0			
	20		35.0~800.0			
AAE11	22	-0.007	45.0~800.0			
	25	-0.020	45.0~800.0			
	30		55.0~800.0			
	35	-0.009	65.0~800.0			
	40	-0.025	75.0~800.0			
50		95.0~800.0				

型号		L		键槽① KA-A	键槽② KB-B	键槽③ KC-C
代码	Dh7	最小单位0.1	最小单位1			
AAE31	6	0 -0.012	18.0~300.0	Ka≥0 b≤A≤100	Kd≥0 b≤B≤100	Kc≥0 b≤C≤100
	8	0	18.0~400.0			
	10	-0.015	18.0~500.0			
	12	0	25.0~600.0			
AAE32	15	-0.018	25.0~700.0			
	20	0	35.0~800.0			
AAE41	25	0	45.0~800.0			
	30	-0.021	55.0~800.0			
	35	0	65.0~800.0			
	40	0	75.0~800.0			
	50	-0.025	95.0~800.0			

■可选加工项

代码	技术说明																																								
LC	变更L尺寸公差 	选型方法 LC ■L<400变更为L±0.05; L≥400变更为L±0.1																																							
KD()	增加开口凸轮用槽 	选型方法 KD10 ■最小单位1 ■适用于右表D规格 <table border="1"> <tr><th>D</th><th>d</th><th>V2</th></tr> <tr><td>6</td><td>5</td><td>4</td></tr> <tr><td>8</td><td>7</td><td>4</td></tr> <tr><td>10</td><td>8</td><td>5</td></tr> <tr><td>12</td><td>10</td><td>5</td></tr> </table>	D	d	V2	6	5	4	8	7	4	10	8	5	12	10	5																								
D	d	V2																																							
6	5	4																																							
8	7	4																																							
10	8	5																																							
12	10	5																																							
KE()	增加扳手槽 	选型方法 KE10 ■最小单位1 <table border="1"> <tr><th>D</th><th>W</th><th>V1</th></tr> <tr><td>6</td><td>5</td><td>8</td></tr> <tr><td>8</td><td>7</td><td>8</td></tr> <tr><td>10</td><td>8</td><td>10</td></tr> <tr><td>12-13</td><td>10</td><td>10</td></tr> <tr><td>15-16</td><td>13</td><td>10</td></tr> <tr><td>17-18</td><td>14</td><td>10</td></tr> <tr><td>20-22</td><td>17</td><td>10</td></tr> <tr><td>25</td><td>22</td><td>15</td></tr> <tr><td>30</td><td>27</td><td>15</td></tr> <tr><td>35</td><td>30</td><td>15</td></tr> <tr><td>40</td><td>36</td><td>20</td></tr> <tr><td>50</td><td>41</td><td>20</td></tr> </table>	D	W	V1	6	5	8	8	7	8	10	8	10	12-13	10	10	15-16	13	10	17-18	14	10	20-22	17	10	25	22	15	30	27	15	35	30	15	40	36	20	50	41	20
D	W	V1																																							
6	5	8																																							
8	7	8																																							
10	8	10																																							
12-13	10	10																																							
15-16	13	10																																							
17-18	14	10																																							
20-22	17	10																																							
25	22	15																																							
30	27	15																																							
35	30	15																																							
40	36	20																																							
50	41	20																																							
LA() LB()	增加1处平面 LA() 增加2处平面 LB() 	LA():增加1处平面 选型方法 LA10-G3 LB():增加2处平面 选型方法 LB10-J3-Y10-X3 ■最小单位1 ■指定 G·J·X,须为50以下 <table border="1"> <tr><th>D</th><th>H</th></tr> <tr><td>3-5</td><td>0.5</td></tr> <tr><td>6-17</td><td>1</td></tr> <tr><td>18-40</td><td>2</td></tr> <tr><td>50</td><td>3</td></tr> </table>	D	H	3-5	0.5	6-17	1	18-40	2	50	3																													
D	H																																								
3-5	0.5																																								
6-17	1																																								
18-40	2																																								
50	3																																								



请按图示订货

■ AAE02-D8-L350-KA10-A10-KB90-B30-KC210-C30

型号		L	KA-A	KB-B	KC-C
代码	D				
AAE02	8	350	Ka≥0 b≤A≤100	Kd≥0 b≤B≤100	Kc≥0 b≤C≤100



交期Delivery

5天 发货

○本产品发货时间不含周日

转
轴

04