


转轴 ◀ 两端内螺纹型/带扳手槽型/直杆型



代码	类型	D公差	材质		表面处理
			国标	相当	
AAP11	两端 内螺纹型	g6	45	S45C	发黑
AAP12			OCr18Ni9	SUS304	无电解镀锌
AAP26			35CrMo	SCM435	发黑
AAP31			45	S45C	发黑
AAP51		h7	OCr18Ni9	SUS304	无电解镀锌
AAP52			45	S45C	发黑
AAP56			OCr18Ni9	SUS304	无电解镀锌
AAP71			45	S45C	发黑
AAP72		h9	OCr18Ni9	SUS304	无电解镀锌
AAP76			45	S45C	发黑

D	g6	h7	h9
4~6	-0.004 -0.012	-0.012	-0.030
8~10	-0.005 -0.014	-0.015	-0.036
12~18	-0.006 -0.017	-0.018	-0.043
20~30	-0.007 -0.020	-0.021	-0.052
35~50	-0.009 -0.025	-0.025	-0.062

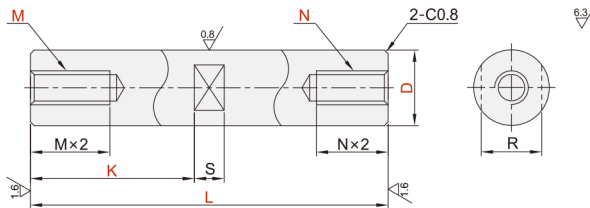

■圆度·直线度·垂直度·同轴度，请参阅转轴产品简介。

型号 代码	最小单位0.1 Dg6 L	M·N	带扳手槽型 K(最小单位1)	R	S
AAP11	4 12.0~200.0	2	K=0或K≥1	-	-
	5 12.0~250.0	2.6 3		5	-
	6 18.0~300.0	4		7	10
	8 18.0~400.0	4 5 6		8	-
	10 18.0~500.0	4 5 6		10	-
	12 25.0~600.0	5 6 8		11	-
	13 25.0~700.0	5 6 8		13	-
	15 25.0~800.0	5 6 8 10		14	12
	16 25.0~800.0	5 6 8 10		15	-
	17 35.0~800.0	5 6 8 10 12		17	-
AAP12	18 18.0~400.0	4 5 6	K=0或K≥1	19	-
	20 18.0~500.0	4 5 6		22	-
	22 25.0~600.0	5 6 8		27	16
	25 25.0~700.0	5 6 8 10		30	-
	26 18.0~300.0	4		36	20
	27 35.0~800.0	5 6 8 10 12		41	-
	28 45.0~800.0	5 6 8 10 12 16		-	-
	30 55.0~800.0	8 10 12 16 20		-	-
	35 65.0~800.0	8 10 12 16 20 24		-	-
	40 75.0~800.0	12 16 20 24 30		-	-

型号 代码	最小单位0.1 Dh9 L	M·N	带扳手槽型 K(最小单位1)	R	S
AAP71	4 12.0~200.0	2	K=0或K≥1	-	-
	5 12.0~250.0	2.6 3		5	-
	6 18.0~300.0	3 4		7	10
	8 18.0~400.0	3 4 5 6		8	-
	10 18.0~500.0	4 5 6		10	-
	12 25.0~600.0	5 6 8		11	-
	13 25.0~700.0	5 6 8 10		13	-
	15 25.0~800.0	5 6 8 10		14	12
	16 25.0~800.0	5 6 8 10		15	-
	17 35.0~800.0	5 6 8 10 12 16		17	-
AAP72	18 18.0~400.0	4 5 6	K=0或K≥1	19	-
	20 18.0~500.0	4 5 6		22	-
	22 25.0~600.0	5 6 8		27	16
	25 25.0~700.0	5 6 8 10		30	-
	26 18.0~300.0	4		36	20
	27 35.0~800.0	5 6 8 10 12		41	-
	28 45.0~800.0	5 6 8 10 12 16		-	-
	30 55.0~800.0	8 10 12 16 20		-	-
	35 65.0~800.0	8 10 12 16 20 24		-	-
	40 75.0~800.0	12 16 20 24 30		-	-

■可选加工项

可选项																									
代码	LC	LA()·LB()	KB()·KC()	KD()																					
技术说明	选型方法 LC ■L<400变更为L±0.05; L≥400变更为L±0.1	选型方法 LA10-G3 选型方法 LB10-J3-Y10-X3 ■最小单位1 ■指定 G·J·X 时,须为 50以下	选型方法 KB50-S10 选型方法 KC50-C8-F40-T10 ■最小单位1 ■指定 S·T·C 时,须为 100以下 ■需要3处键槽时, 请同时选择KB与KC ■适用于D6以上规格 ■键槽详情见转轴产品简介。	选型方法 KD10 ■最小单位1 ■适用于下表D规格																					
		<table><tr><td>D</td><td>H</td></tr><tr><td>6~17</td><td>1</td></tr><tr><td>18~40</td><td>2</td></tr><tr><td>50</td><td>3</td></tr></table>	D	H	6~17	1	18~40	2	50	3		<table><tr><td>D</td><td>d</td><td>V₂</td></tr><tr><td>6</td><td>5</td><td rowspan="2">4</td></tr><tr><td>8</td><td>7</td></tr><tr><td>10</td><td>8</td><td rowspan="2">5</td></tr><tr><td>12</td><td>10</td></tr></table>	D	d	V ₂	6	5	4	8	7	10	8	5	12	10
	D	H																							
	6~17	1																							
	18~40	2																							
50	3																								
D	d	V ₂																							
6	5	4																							
8	7																								
10	8	5																							
12	10																								



请按图示订货

■AAP12-D12-L30-M6-N6-K10

型号	D	L	M·N	K
代码	D	L	M·N	K
AAP12	12	30	6	K=0或K≥1



交期Delivery

5天

发货

○本产品发货时间不含周日

转轴

04