




代码	类型	材质		表面处理	硬度 (肖氏)	使用温度范围
		金属部分	橡胶部分	金属部分		
YUC11	组合型	低碳钢	丁腈橡胶	镀黄铜	A75	-25-80℃

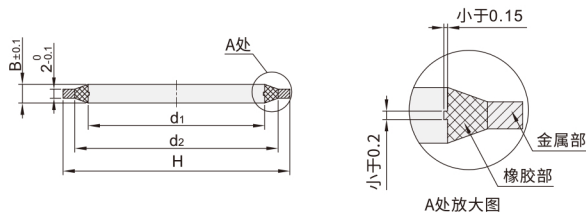

型号		d ₁	d ₁ 公差	*d ₂	d ₂ 公差	H	H公差	B	孔d ₂ 允许偏心	适用螺 纹尺寸
代码	公称直径									
YUC11	8	8.4	±0.12	10	+0.24 0	14	0 -0.24	2.7	0.1	M8
	10	10.4		12		16				M10(G1/8")
	12	12.4		14		18				M12
	14	14.4		16		20				M14(G1/4")
	16	16.4		18		22				M16
	18	18.4		20		25				M18(G3/8")
	20	20.5	±0.14	23	+0.28 0	28	0 -0.28			M20
	22	22.5		25		30				M22(G1/2")
	24	24.5		27		32				M24
	27	27.5		30		35				M27(G3/4")
	30	30.5		33		38		M30		
	33	33.5		36		42		M33(G1")		
	36	36.6	±0.17	40	+0.34 0	46	0 -0.34	2.9	0.15	M36
	39	39.6		43		50				M39
	42	42.6		46		53				M42(G1 1/4")
	45	45.6		49		56				M45
	48	48.7		52		60				M48
	52	52.7		56		66				M52
	60	60.7	±0.20	64	75	0 -0.40	M60(G2")			

带*尺寸仅供参考



请按图示订货

■ YUC11-10

型号

代码	公称直径
YUC11	10



交期Delivery

5天

发货

○ 本产品发货时间不含周日

