


# 压缩弹簧 ◀ 滚珠滑套用



代码	类型	材质		表面处理
		国际	相当	
ABSW	滚珠滑套用	琴钢丝	SWP-B	发黑

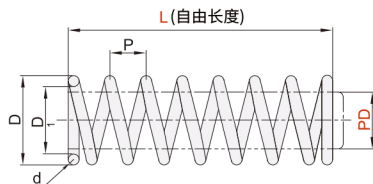

■两端均未进行磨削加工。

型号		D	D1	d	P	压紧长度	弹簧常数 g/mm
代码	PD						
ABSW	10	11.7	10.5	0.6	5	30	4.8 16
						35	5.4 14
						40	6.0 12
						45	6.6 11
						50	7.2 9
						55	7.8 9
						60	8.4 8
						65	9.0 7
						70	9.6 7
						75	10.2 6
	80	10.8 6					
	13	14.9	13.5	0.7	6	30	4.9 17
						35	5.4 15
						40	6.1 13
						45	6.6 11
						50	7.2 10
						55	7.8 9
						60	8.4 8
						65	8.9 8
						70	9.6 7
						75	10.1 7
	80	10.7 6					
	16	18.3	16.5	0.8	12	30	3.2 32
						35	3.4 26
						40	3.7 23
						45	4.0 22
						50	4.2 20
						55	4.5 19
						60	4.8 16
						65	5.0 15
70						5.3 14	
75						5.6 13	
80	5.8 12						
85	6.1 12						
90	6.4 11						

型号		D	D1	d	P	压紧长度	弹簧常数 g/mm
代码	PD						
ABSW	20	22.5	20.5	1	14	35	4.7 40
						40	5.0 35
						45	5.3 31
						50	5.6 28
						55	5.8 26
						60	6.0 23
						65	6.5 22
						70	7.0 20
						75	7.4 19
						80	7.7 18
	85	8.1 16					
	90	8.5 15					
	25	27.9	25.5	1.2	14	40	6.0 38
						45	6.3 34
						50	6.6 30
						55	7.0 28
						60	7.4 25
						65	7.9 24
						70	8.4 22
						75	8.7 20
80						9.0 19	
85						9.3 18	
90	9.6 17						

弹簧 / 氮气弹簧 32

## ■ ABSW-PD13-L30



请按图示订货

型号		L
代码	PD	
ABSW	13	30
		35



交期Delivery

**3 天** 发货

○本产品发货时间不含周日