




代码	类型	材质	硬度
YEN21J	垫片环	SUS304H	350-400HV
YEN22J		黄铜 (C2801P 或 C2680P)	/

注意：由于工艺及批次原因，小部分产品背面边缘处理可能会有0.1-1mm缺口，不影响产品使用。

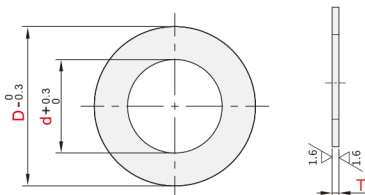

■ 垫片环

代码	T公差								
	0.01	0.02	0.03	0.05	0.1	0.2	0.3	0.5	1
YEN21J	±0.003	±0.003	±0.005	±0.005	±0.02	±0.03	±0.035	±0.04	±0.05
YEN22J	/	/	/				±0.04	±0.05	±0.08

型号		D								T		
代码	d											
YEN21J	2	3								(0.01)		
	/	4	5	6								
	3	4								(0.02)		
	/	5	6	7	8	10						
	4	6	7	8	10	12					(0.03)	
	5	7	8	10	12	14	16					
	6	8	10	12	14	16					仅J-YEN21	
	8	12	14	16	18	20						
	10	12	14	16	18	20					(0.05)	
	12	16	18	20	21	22						
	YEN22J	15	18	20	21	22	24					仅J-YEN21
	16	20	21	22	24	28					J-YEN22	
	17	20	21	22	24	28	30	32				
	20	24	28	30	32	35	40					0.1
	22	28	30	32	35	40					0.2	
	25	30	32	35	40	42					0.3	
	28	32	35	40	42	45					0.5	
	30	35	40	42	45	50					1.0	
35	42	45	50	55								
40	45	50	55									
45	50	55										

注意：当d=2,D=3时，厚度T0.5、T1.0不适用于J-YEN21；当d=3,D=4时，厚度T0.5、T1.0不适用于J-YEN21。



请按图示订货

■ YEN21J-d2-D3-T0.01

型号		D	T
代码	d		
YEN21J	2	3	0.01



交期Delivery

5 天 发货

○ 本产品发货时间不含周日

