



氮气弹簧 ◀ 头部安装限定型/反作用力选择型



代码	类型	材质			表面处理		使用温度
		气缸	活塞杆	衬套	气缸	活塞杆	
AGTV	头部安装限定型	STKM11A	S20C	聚脞醛树脂	烤漆	镀铬	-20°C ~60°C

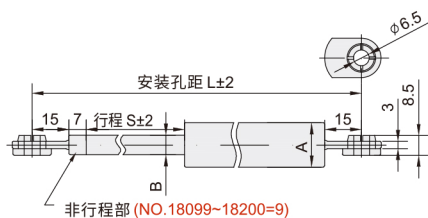

NO. 15049-18200

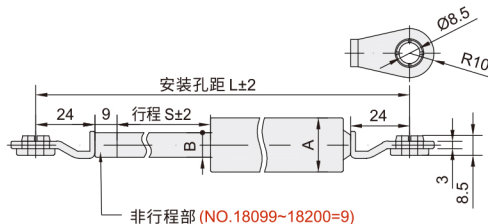

NO. 22250-22360

弹簧/氮气弹簧 32

型号		反作用力	最大长度 Lmax	最小长度 Lmin	行程	氮气反作用力 (20°C)					A	B	H	适用安装 支架	重量 (g)					
						最大长度-10mm行程时		最大长度-(S)mm行程时												
						Fa		Fb												
代码	规格					N	kgf	N	kgf	(s)										
AGTV	15049 030	181	132	49	49	30	3	40	4.1	39	15	7	110	BAZH-6A BAZH-6B BAZH-6C BAZH-6D	83					
	15049 055					55	6	71	7.2											
	15049 070					70	7.1	89	9											
	15049 085					85	9	109	11.1											
	15049 150	221	152	69	69	150	15	191	19.5	59										
	15069 050					50	5	67	6.8											
	15069 080					80	8	107	10.9											
	15069 100					100	10.2	132	13.4											
	15069 120	261	172	89	89	120	12	158	16.1	79			18			8	150	205		
	15089 070					70	7	94	9.6											
	15089 085					85	8.7	115	11.7											
	15089 100					100	10	135	13.8											
	15089 050	281	184	97	97	150	15	202	20.6	89	22	10		160	531 556 469					
	15089 200					200	20	268	27.3											
	15099 075					75	8	101	10.3											
	15099 120					120	12	162	16.5											
	15099 200	365	245	120	120	200	20	270	27.6	110				301			440		221	523
	18099 300					300	30.5	392	39.9											
	18099 400					400	40.7	522	53.2											
	18120 100					100	10	123	13											
	18120 200	420	270	150	150	200	20	245	25	140			280			290		246	523	
	18120 300					300	31	367	37											
	18120 400					400	41	489	50											
	18150 100					100	10	126	12.9											
	18150 150	525	325	200	200	150	15	188	19.2	190	352	377			301			523		
	18150 200					200	20	251	25.6											
	18150 250					250	26	313	31.9											
	18200 100					100	10	127	13											
	18200 150	635	385	250	250	150	15	190	19.4	240				290	350		352			523
	18200 200					200	20	253	25.8											
18200 300	300					31	379	38.7												
22250 100	100					10	129	13.2												
22250 150	670	400	270	270	150	15.2	193	19.6	260	377			407			367	523			
22250 200					200	20	257	26.2												
22250 300					300	31	384	39.2												
22250 400					400	41	511	52.1												
22270 345	700	410	290	290	345	35	528	53.9	280		440	469				377		523		
22270 500					500	51	763	77.9												
22270 700					700	71	1065	108.7												
22290 745					745	76	1160	118.4												
22290 845	740	440	300	300	845	86	1314	134.1	290					469	523	377			523	
22300 200					200	20	257	26.2												
22300 250					250	26	321	32.8												
22300 300					300	31	385	39.3												
22360 215	833	473	360	360	215	22	284	29	350	469			523			440	523			
22360 345					345	35	456	46.5												

AGTV-15049-055



请按图示订货

型号		
代码	规格	反作用力
AGTV	15049	30
	15049	55



交期Delivery

3天 发货

○本产品发货时间不含周日