



氮气弹簧 ◀ 头部安装限定型/反作用力固定型



代码	类型	材质		表面处理		使用温度
		气缸	活塞杆	气缸	活塞杆	
AGTX	头部安装限定型	STKM11A	S20C	烤漆	镀硬铬	-20°C ~60°C

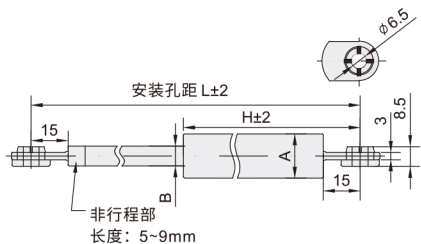

NO. 15050A~18100A

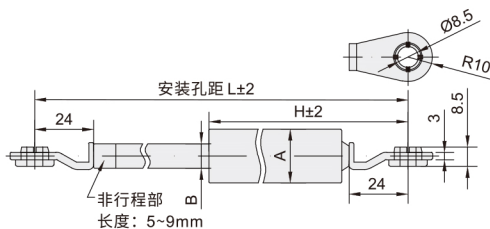

NO. 22080A~22300B

弹簧 / 氮气弹簧 32

型号	最大长度 Lmax	最小长度 Lmin	行程	氮气反作用力 (20°C)					A	B	C1	C2	D	G	H	适用安装 支架	重量 (g)		
				最大长度 -10mm行程时		最大长度 - (S)mm行程时													
				N	kgf	N	kgf	(s)											
15050A	181	131	50	27	2.8	32	3.4	40	15	6	15	15	6.5	R8	110	BAZK-6A	75		
15050B				85	8.7	102	10.4											60	
15050C				147	15	175	17.9											41.5	
15070A	221	151	70	81	8.3	102	10.4	60	18	8	20	20	8.5	R10	131	BAZK-6A	90		
15070B				119	12.1	124	12.7											41.5	
15090A				69	7	89	9.1											80	
15090B	261	171	90	79	8.1	103	10.5	80	15	6	15	15	6.5	R8	150	BAZK-6A	108		
15090C				88	9	115	11.7											41.5	
15090D				147	15	191	19.5											60	
15100A	281	181	100	76	7.8	103	10.5	90	18	8	20	20	8.5	R10	161	BAZK-6A	120		
15100B				196	20	257	26.2											41.5	
18090A				263	26.8	343	35											80	
18100A	281	181	100	324	33.1	428	43.7	90	15	6	15	15	6.5	R8	161	BAZK-6A	190		
22080A	279	199	80	196	20	237	24.2	70	22	10	24	24	8.5	R10	169.5	BAZK-8A	178		
22096A	306	210	96	392	40	494	50.4	86										186	195
22142A	472	330	142	279	28.5	372	38	125										241	265
22147A	412	265	147	147	15	194	19.8	130	12.5	24	24	8.5	R10	306	BAZK-8B	370			
22235A	580	344.5	235.5	129	13.2	195	19.9	206									320.5	370	
22235B				248	25.3	314	32	208									376	470	
22243A				196	20	301	30.7	215	360	470									
22243B	627	384	243	433	44.2	657	67	240	20	20	20	8.5	R10	376	BAZK-8D	470			
22270A				343	35	497	50.7	240									376	500	
22270B				507	51.7	739	75.4	275									376	525	
22300A	700	400	300	745	76	1160	118.4	275	20	20	20	8.5	R10	376	BAZK-8E	500			
22300B				850	86.7	1320	134.7	275									376	525	

AGTX-15050A



请按图示订货

型号	
代码	规格
AGTX	15050A 15050B



交期Delivery

3天 发货

○本产品发货时间不含周日