


拉伸弹簧 ◀ 超轻载型



代码	类型	材质		表面处理	挂钩相对角度
		国标	相当		
AAWA	超轻载型	弹簧钢	SWP-A	发黑	-
AAUA		OCr18Ni9	SUS304-WPB		180°

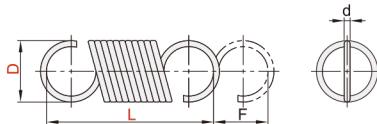

型号			线径 d	动态负载时		初始 张力 (N)	弹簧 常数 N/mm	型号			线径 d	动态负载时		初始 张力 (N)	弹簧 常数 N/mm
代码	D	L		最大位移量 Fmax	最大载荷 N			最大位移量 Fmax	最大载荷 N	最大位移量 Fmax		最大载荷 N			
AAWA	2	10	0.2	6.7	0.69	0.13	0.083	AAWA	25	0.7	8.53	18.1	1.08	0.41	
		15		11.8			0.047		30			27.1		0.28	
		20		17.2			0.032		35			36.2		0.21	
		25		22.8			0.025		40			44.7		0.17	
		30		28.5			0.02		45			54.2		0.14	
	3	10	0.25	10.4	1.27	0.15	0.11		50			63.3		0.12	
		15		23			0.049		55			69		0.11	
		20		35.9			0.031		60			80		0.093	
		25		47.9			0.024		65			89.4		0.083	
		30		57.5			0.02		70			95		0.078	
AAUA	4	15	0.35	14.6	2.26	0.25	0.14	AAUA	30	0.9	10.8	13.4	2.06	0.65	
		20		24.1			0.083		35			18.5		0.47	
		25		32.5			0.062		40			24		0.36	
		30		42.7			0.047		45			29.6		0.29	
		35		51.2			0.039		50			35.6		0.25	
		40		60.3			0.033		55			42.3		0.21	
	5	15	0.45	8.2	3.24	0.49	0.33		60			46.8		0.19	
		20		15.5			0.18		70			59.3		0.15	
		25		21.5			0.13		80			68.4		0.13	
		30		29.4			0.093		90			80.9		0.11	
		35		35			0.078		100			93.6		0.093	
AAUA	6	40	0.55	43	6.08	0.64	0.064	AAUA	35	1.1	19.6	17.8	2.94	0.94	
		45		50.9			0.054		40			25		0.67	
		50		56			0.049		45			31		0.54	
		20		16.2			0.34		50			37.7		0.44	
		25		25.2			0.22		55			44.7		0.37	
		30		34.7			0.16		60			51.5		0.32	
		35		42.7			0.13		70			65.3		0.26	
		40		50.4			0.11		80			77.2		0.22	
		45		61.6			0.088		90			94.4		0.18	
		50		69.3			0.079		100			106.2		0.16	

■ 初始张力，弹簧常数为参考值。负载(kgf)=负载N×0.101972

■ AAWA-D2-L10



请按图示订货

型号		L	线径d
代码	D		
AAWA	2	10	0.2



交期Delivery

3天 发货

○本产品发货时间不含周日



www.vipdo.cn



400-098-1117

工厂自动化零件一站式采购平台

汇集国内外知名品牌，让采购更便捷，让设计更高效！