


# 定位柱 ◀ 长行程碳钢型·前端球面型 带防松型



代码	类型	载荷	主体			销			弹簧	使用环境温度	
			材质	硬度	表面处理	材质	硬度	表面处理			
YZP01	长行程 碳钢型	超轻载	S45C	29-35 HRC	发黑	S45C	57-63 HRC	镀锌	SWP-B	-30~80°C	
YZP02		轻载									发黑
YZP03		重载									
YZP04		超重载									镀镍
YZP05		超轻载			树脂球头		聚缩醛	/			/
YZP06		轻载									
YZP07		重载									
YZP08		超重载									

① M3/M4规格未进行防松动处理；② 高温长时间放置，防松动效果最理想；  
③ 低温短时间放置，防松动效果有所降低。

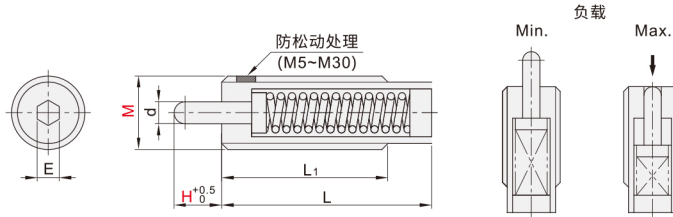

型号	代码	M	H	d	L		L1	E	负载 (N)							
					超轻 重载型	超重 载型			超轻载		轻载		重载		超重载	
									min.	max.	min.	max.	min.	max.	min.	max.
金属球头 YZP01 YZP02 YZP03 YZP04	3	(1.5)* (3)*	1.1	10	15	10 (15)	0.9	0.04	0.33	0.49	1	0.78	2.9	2.2	4.5	
				15	20	15 (20)		0.08		0.29			1.8			
	4	(2)* (4)*	1.6	15	24	15 (24)	1.3	0.22	0.66	1	2	2.9	8.8	5.2	13	
				24		24		0.23		0.59		2				
	5	(3)* (5)*	2	20	27	20 (27)	1.5	0.73	2.96	2	9.8	4.9	19.6	9.1	24.5	
				27	39	27 (39)		0.71		2		2.9		8.8		24.8
	6	(3)* (5)* 10	2.5	25	30	25 (30)	2	0.84	3.21	5.9	9.8	7.8	29.4	14.2	39.5	
				30	36	30 (36)			2	4.9			14.1	39.4		
				39	/	30		/	1.4	5		28	/	/		
	8	(3)* (5)* 10	3.1	25	27	25 (27)	2.5	0.89	3.31	5.9	9.8	14.7	29.4	35.3	41.2	
				27	35	27 (30)			2.9	7.8		14.7				
				43	/	30		/	3	7		28.8	/	/		
10	(5)* (10)* 15	3.8	30	35	30	3	1.89	4.71	5.9	14.7	8.8	49	15.7	62.8		
			43	53				2.9	7.8		12.7					
			58	/				/	6.2		48.7	/	/			
12	(5)* (10)* (15)* 20	5.5	30	43	30 (35)	4	1.49	4.71	5.9	14.7	18.6	49	37.2	98.1		
			43	58			1.29	5.91	2.9		7.8		14.7			
			51	78			1.59		3.5		4.9		14.9			
			78	/			/	/	6.9		/		/			
树脂球头 YZP05 YZP06 YZP07 YZP08	(10)* (15)* (20)* (30)	8	60	60	35	5	1.69	12.81	5.9	39.2	12.7	78.5	23.5	147.2		
			70						3.9				21.6			
			85	90					4.9		9.8		12.7			
			125	125					2.9		6.9		19.6			
	16	40 50 60 70 80	8	155	/	45	10	/	/	4.9	49	29.4	/	/		
				159						2.9		3.9			5.5	
				185						19.6		29.4			93.2	
										3.4		5.5			19.6	
20	(15) 20 30 40	10	60	80	45	6	/	/	12.7	78.5	24.5	147.1	/	/		
			72						11.7		22.6					
			96	/					19.6		44.1				196.1	
			120						47.1		215.7				24.5	314
24	7 (15) 20 30 40	10	60	84	45	10	/	/	19.6	98.1	44.1	215.7	/	/		
			75						17.7		44.1					
			100													
			124													
30	15 20 30 40	14	66	/	45	14	/	/	27.5	117.1	44.1	274.6	/	/		
			78								53					
			100								45.1					
			123								47.1					

① YZP04/06/07 仅适用于()的H尺寸规格/② YZP01/05/08仅适用于带\*的H尺寸规格/③ 超重载型B1尺寸为()内数值。



## ■ YZP01-M3-H1.5

型号		H
代码	M	
YZP01	3	(1.5)*

请按图示订货



交期Delivery

5天 发货

○本产品发货时间不含周日