

# 轴用挡圈 ◀ E型 弹簧钢/不锈钢 日标/国标




## ■日标·E型轴用挡圈

代码	类型	材质	硬度	表面处理
YCS11	E型轴用挡圈	弹簧钢	42~51HRC	磷化黑
YCS12		SUS420-J2	34~42HR	/


## ■国标·E型轴用挡圈

代码	类型	材质	表面处理	适用标准
YCS31	E型轴用挡圈	65Mn(弹簧钢)	发黑	GB/T 894.1-1986
YCS32		SUS304	\	

日标·E型轴用挡圈  
YCS11/12

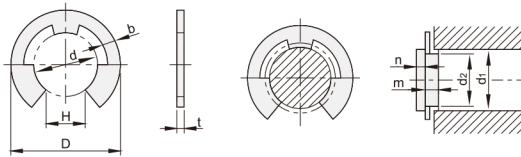

国标·E型轴用挡圈  
YCS31/32

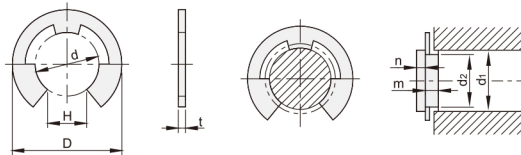

## ■日标·E型轴用挡圈

代码	规格	挡圈					适用轴 (参考)									
		d	D	H	t	d1 的分类		d2	m	n(min)						
						大于	以下									
YCS11 YCS12	1.2	1.2	3	±0.1	1	0.3	±0.025	1.4	2	1.23	0.4	0.5	0+0.05	0.6		
	1.5	1.5		4	1.3			2	2.5	1.53				0.8		
	2	2		5	1.7			2.5	3.2	2.05				1		
	2.5	2.5	6	±0.2	0-0.25	0.4	±0.03	3.2	4	2.55	0+0.06	0.5	0+0.05	1		
	3	3						7	2.6	4				5	3.05	1
	4	4						9	3.5	5				7	4.05	1.2
	5	5	11	±0.2	0-0.30	0.6	±0.04	6	8	5.05	0+0.075	0.7	0+0.1	1.2		
	6	6						12	5.2	7				9	6.05	1.2
	7	7						14	6.1	8				11	7.1	1.5
	8	8	16	±0.2	0-0.35	0.8	±0.04	9	12	8.1	0+0.09	0.9	0+0.1	1.8		
	9	9						18	7.8	10				13	9.1	2.1

## ■国标·E型轴用挡圈

型号		公称直径	极限偏差	挡圈尺寸				安装沟槽尺寸				轴径		
代码	规格			H		t		Dmax	d2		m		n≥	d1 >
				基本尺寸	极限偏差	基本尺寸	极限偏差		基本尺寸	极限偏差	基本尺寸	极限偏差		
YCS31 YCS32	1.2*	1.2	0	0.9	±0.08	0.3		3	1.2	0.4	+0.14	1.0	1.5-2	
	1.5	1.5		1.2	±0.125	0.4	+0.03 -0.06	4	1.5	+0.06 0			0.5	2-2.5
	2	2		1.7				5	2.0					2.5-3
	2.5	2.5	2.2	6				2.5	3-3.5					
	3	3	0	2.5	±0.15	0.6	+0.04 -0.07	7	3.0	+0.075 0	0.9	1.5	3.5-4	
	3.5*	3.5		3.0				8	3.5				4-5	
	4	4		3.5				9	4.0				5-6	
	5	5	-0.18	4.5	±0.18	1.0	+0.04 -0.10	10	5.0	+0.09 0	1.1	2.0	6-7	
	6	6		5.5				12	6.0				7-9	
	8	8		7.5				16	8.0				9-10	
	9	9	0	8.0	±0.215	1.2	+0.05 -0.13	18	9.0	+0.11 0	1.3	3.0	10-13	
	12	12		10.5				24	12.0				13-16	
	15	15		13.0				1.5	+0.06 -0.15				30	15.0

带\*尺寸不适用于YCS32



请按图示订货

### ■YCS11-1.2

型号

代码 规格

YCS11 1.2



交期Delivery

3天 发货

○本产品发货时间不含周日