



系列码	材质	表面处理
XCS01	A6063-T5	喷砂氧化
XCS03	A6063-T5	黑色氧化

■ 切断面未进行氧化处理。

(当L>1000mm时, 长度尺寸公差±0.5)




■ 槽口详图




I部放大图


XCS01-3030
XCS03-3030




XCS01-3030A




XCS01-3030B




XCS01-3030R
XCS03-3030R




XCS01-3060
XCS03-3060

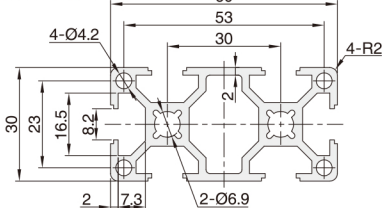


XCS01-3060A

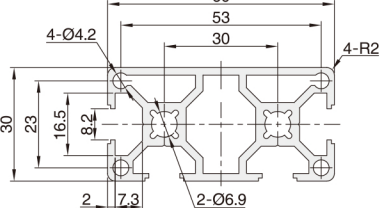


XCS01-3060B

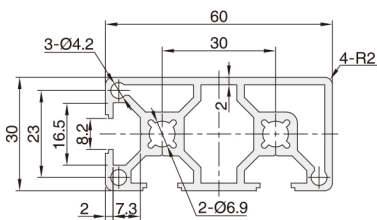


XCS01-3090

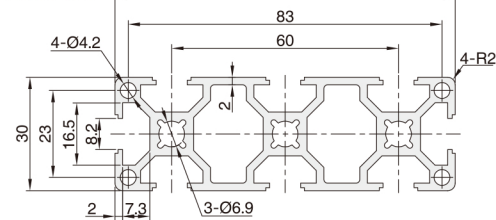

XCS01-6630

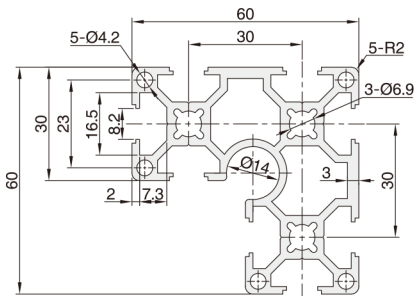


XCS01-6630R

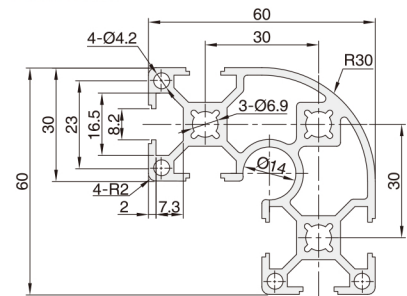


视图标准: 第三视角



XCS01-6060

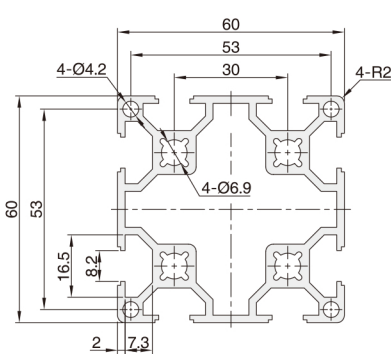

XCS01-5050S

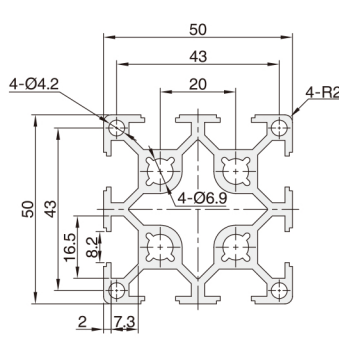

XCS01-30120

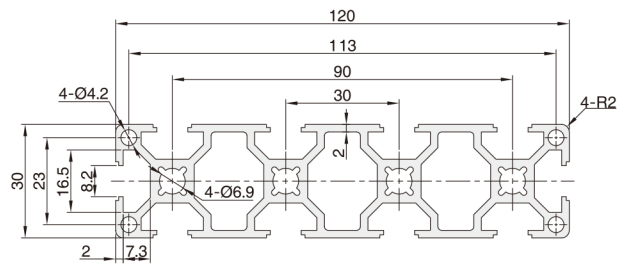

视图标准: 第三视角

系列码	规格	L(mm)	槽宽类型	截面尺寸	重量(kg/m)	截面积(mm²)	截面惯性矩		抗弯截面模数	
							Ix(mm⁴)	Iy(mm⁴)	Wx(mm³)	Wy(mm³)
XCS01	3030	50~6000	8	30×30	0.84	308.56	2.74×10⁴	2.74×10⁴	1827.53	1827.53
	3030A				0.86	315.73	2.96×10⁴	2.67×10⁴	1918.28	1776.67
	3030B				0.91	333.73	2.98×10⁴	2.98×10⁴	1895.81	1895.81
	3030R				0.8	293.64	2.34×10⁴	2.34×10⁴	1474.11	1474.11
	3060			30×60	1.52	555.89	5.14×10⁴	19.37×10⁴	3428.8	6456.6
	3060A				1.59	582.83	5.71×10⁴	19.75×10⁴	3630.76	6583.2
	3060B				1.59	581.43	5.63×10⁴	20.2×10⁴	3608.75	6706.6
	6630				2.25	823.65	25.74×10⁴	25.74×10⁴	7355.86	7355.86
	6630R			60×60	2.13	779.63	23.66×10⁴	23.66×10⁴	7001.78	7005.9
	6060				2.42	887.52	34.88×10⁴	34.88×10⁴	11627.9	11627.9
	3090				2.19	803.23	7.545×10⁴	61.01×10⁴	5030.07	13558.53
	30120				2.86	1046.42	9.95×10⁴	138.80×10⁴	6631.27	23133.7
	5050S			30×90	2.13	781.26	18.51×10⁴	18.51×10⁴	7404.08	7404.08
	3030R			30×120	0.84	308.56	2.74×10⁴	2.74×10⁴	1827.53	1827.53
XCS03	3030			30×30	0.8	293.64	2.34×10⁴	2.34×10⁴	1474.11	1474.11
	3060			30×60	1.52	555.89	5.14×10⁴	19.37×10⁴	3428.8	6456.6

■ 加工项目

指定方法	说明
LT(左面)	选型方法: LT/RT/DT ■ Ø6.9通孔变更为螺孔M8深15。
RT(右面)	
DT(两面)	

■ 加工项目指定方法, 见订货范例。



请按图示订货

■ XCS01-3030-L150-LT

系列码	规格	L(mm)	加工项目
XCS01	3030	L150	LT



交期Delivery

5天

发货

○ 本产品发货时间不含周日



www.vipdo.cn



400-098-1117

工厂自动化零件一站式采购平台

汇集国内外知名品牌, 让采购更便捷, 让设计更高效!