


系列码	材质	表面处理
XCS01	A6063-T5	喷砂氧化
XCB03		黑色氧化

■ 切断面未进行氧化处理


■ 切割精度: $\pm 0.5\text{mm}$




(当 $L > 1000\text{mm}$ 时, 长度尺寸公差 ± 0.5)




■ 槽口详图

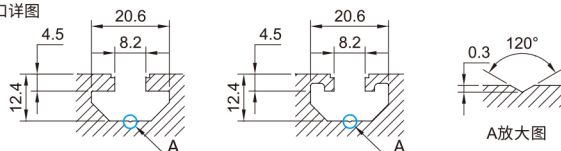


XCS01-4040




XCS01-4040C




XCS01-4040E
XCS03-4040E




XCS01-4040J




XCS01-4040A




XCS01-4040B




XCS01-4040R




XCS01-4040RE
XCS03-4040RE




XCS01-4080

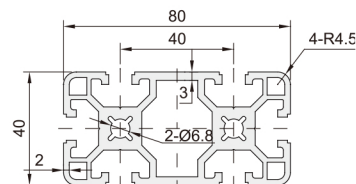


XCS01-4080C

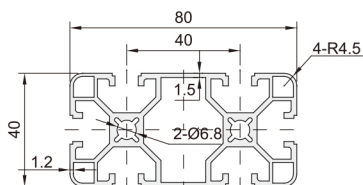

XCS01-4080E




XCS01-4040AS




视图标准: 第三视角


XCS01-4080J

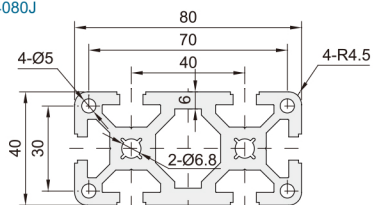


XCS01-4080A




XCS01-4080B




XCS01-8840

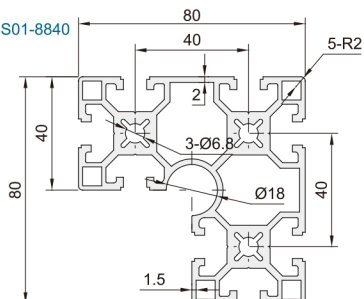


XCS01-8840R




XCS01-8840RE




XCS01-8080

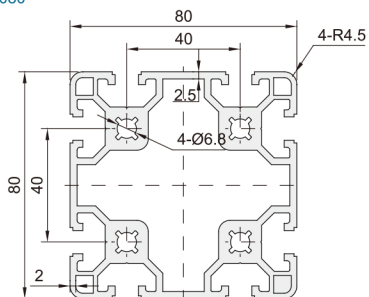



XCS01-8080E

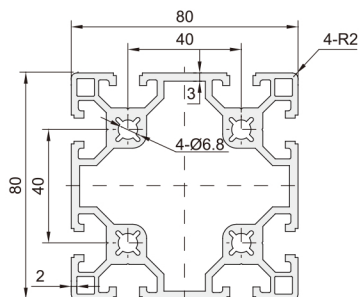

XCS01-8080C

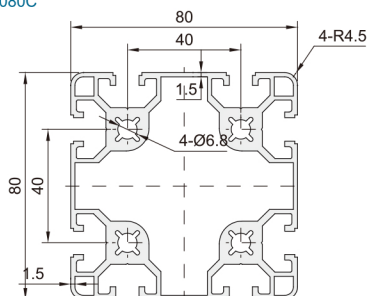


XCS01-8080J

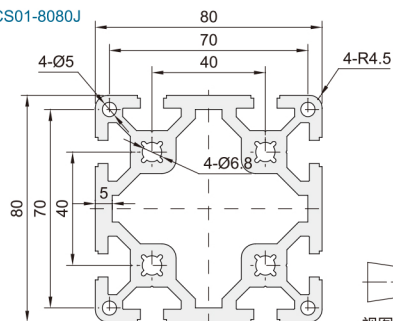

视图标准：第三视角

系列码	规格	L(mm)	槽宽类型	截面尺寸	重量(kg/m)	截面积(mm²)	截面惯性矩		抗弯截面模数	
							Ix(mm⁴)	Iy(mm⁴)	Wx(mm³)	Wy(mm³)
XCS01	4040	50-6000	8	40×40	1.63	597.7	8.82×10⁴	8.82×10⁴	4411.05	4411.05
	4040C				1.00	432.73	6.67×10⁴	6.67×10⁴	3333.30	3333.30
	4040E				1.55	608.1	9.22×10⁴	9.22×10⁴	4609.80	4609.80
	4040J				2.04	747.69	11.47×10⁴	11.47×10⁴	5733.10	5733.10
	4040A				1.61	588.53	8.70×10⁴	8.70×10⁴	4305.22	4305.22
	4040B				1.64	596.6	8.87×10⁴	8.87×10⁴	4395.26	4395.26
	4040R				1.49	544.45	7.14×10⁴	7.14×10⁴	3323.41	3320.92
	4040RE				1.48	543.4	7.24×10⁴	7.24×10⁴	3360.99	3360.99
	4040AS				1.31	484.39	7.44×10⁴	7.44×10⁴	3720.21	3720.21
	4080			40×80	2.96	1085.8	17.45×10⁴	65.52×10⁴	8722.75	16380.50
	4080E				3.10	1094.38	17.79×10⁴	66.91×10⁴	8893.20	16727.53
	4080C				2.08	760.52	12.80×10⁴	47.98×10⁴	6399.25	11993.75
	4080J				3.98	1457.63	23.85×10⁴	83.36×10⁴	11922.55	20838.83
	4080A				2.97	1086.71	17.84×10⁴	66.00×10⁴	8898.28	16500.98
	4080B			80×80	2.88	1053.55	17.44×10⁴	62.72×10⁴	8597.83	15307.57
	8840				3.97	1453.23	82.2×10⁴	82.2×10⁴	17810.51	17810.51
	8840R				3.48	1273.25	72.07×10⁴	72.07×10⁴	16722.25	16722.25
	8840RE				3.54	1298.44	74.69×10⁴	74.69×10⁴	17466.95	17466.95
	8080				4.72	1727.15	119.20×10⁴	119.20×10⁴	29799.03	29799.03
	8080E				4.48	1642.72	119.09×10⁴	119.09×10⁴	29771.48	29771.48
	8080C				4.08	1482.51	102.13×10⁴	102.13×10⁴	25532.05	25532.05
	8080J				6.3	2306.57	159.74×10⁴	159.74×10⁴	39934.13	39934.13
XCS03	4040E			40×40	1.66	608.1	9.22×10⁴	9.22×10⁴	4609.80	4609.80
	4040RE				1.52	543.4	7.24×10⁴	7.24×10⁴	3360.99	3360.99

加工项目

指定方法	说明
LT(左面)	选型方法: LT/RT/DT  ■ Ø6.8通孔变更为螺孔M8深15。
RT(右面)	
DT(两面)	

加工项目指定方法，见订货范例。



请按图示订货

■ XCS01-4040-L150-LT

系列码	规格	L(mm)	加工项目
XCS01	4040	L150	LT



交期Delivery

5天

发货

○本产品发货时间不含周日