


系列码	材质	表面处理
XCS01	A6063-T5	喷砂氧化
XCS03		黑色氧化


- 切断面未进行氧化处理。
- 长度范围:50-6000mm。
- 切割精度:±0.5mm。




■ 槽口详图




XCS01-4545C




XCS01-4545A




XCS01-4545R
XCS03-4545R




XCS01-4545E
XCS03-4545E




XCS01-4545B





XCS01-4545Y



XCS01-4590C

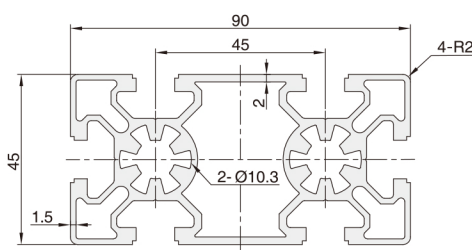


XCS01-4590Y


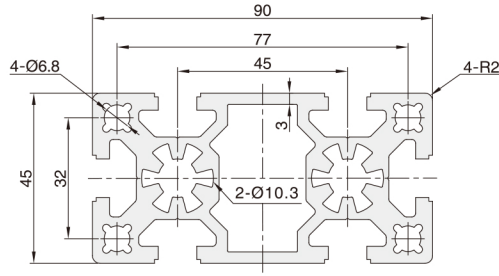


视图标准: 第三视角

XCS01-9090C

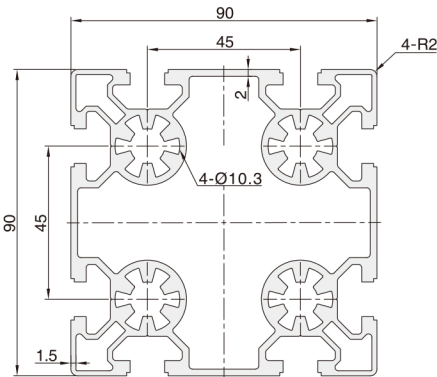

XCS01-9090Y

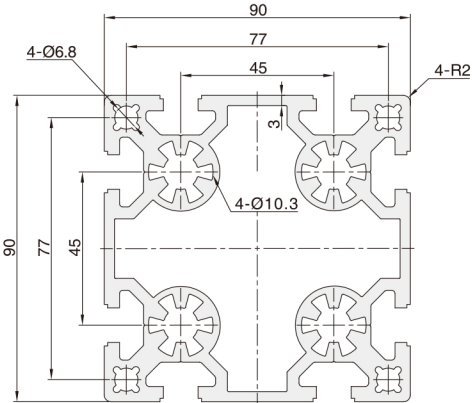

视图标准: 第三视角

系列码	规格	L(mm)	槽宽类型	截面尺寸	重量(kg/m)	截面积(mm²)	截面惯性矩		抗弯截面模数	
							Ix(mm⁴)	Iy(mm⁴)	Wx(mm³)	Wy(mm³)
XCS01	4545C	50~6000	10	45×45	1.67	610.34	10.66×10⁴	10.66×10⁴	4735.33	4735.33
	4545E				2.10	771.03	14.53×10⁴	14.53×10⁴	6459.16	6459.16
	4545Y				6.71	2457.07	224.16×10⁴	224.16×10⁴	49813.53	49813.53
	4545A				2.59	950.26	18.30×10⁴	18.30×10⁴	8134.18	8134.18
	4545B				1.94	710.71	12.98×10⁴	13.77×10⁴	5454.25	6120.13
	4545R				1.85	676.02	12.9×10⁴	12.53×10⁴	5537.12	5333.78
	4590C			45×90	3.19	1169.12	23.7×10⁴	91.95×10⁴	10296.53	20432.18
	4590Y				4.30	1574.15	32.51×10⁴	131.58×10⁴	14449.07	29240.98
	9090C			90×90	5.31	1944.5	167.04×10⁴	167.04×10⁴	37119.44	37119.44
	9090Y				6.71	2457.07	224.16×10⁴	224.16×10⁴	49813.53	49813.53
XCS03	4545E	50~6000	10	45×45	2.10	771.03	14.53×10⁴	14.53×10⁴	6459.16	6459.16
	4545RC				1.76	644.5	10.33×10⁴	10.33×10⁴	4210.07	4210.07

■ 加工项目

指定方法	说明
LT (左面)	选型方法: LT/RT/DT ■ Ø10.3通孔变更为螺孔M12深25
RT (右面)	
DT (两面)	

■ 加工项目指定方法, 见订货范例。



请按图示订货

■ XCS01-4545E-L150-DT

系列码	规格	L(mm)	加工项目
XCS01	4545E	L150	DT



交期Delivery

5天

发货

○ 本产品发货时间不含周日