


旋转平台ARN系列 ◀ 130转台




代码	型号	类型	适用电机/减速机
KZIT03	ARN130 ARN130-R/Z ARN130-F	130中空旋转平台	200/400W AC伺服马达
			57/60/86步进电机
			行星减速机
			转角器


ARN130

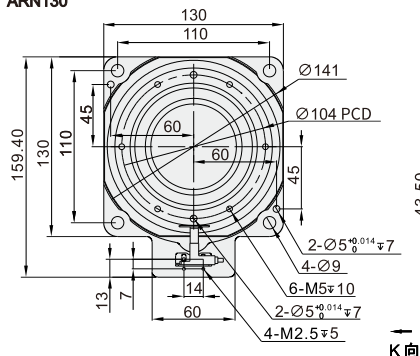


K向




K向视图




ARN130-R

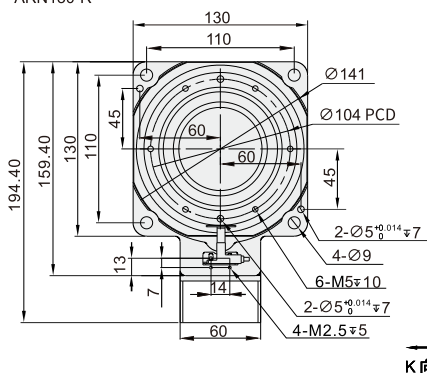


K向

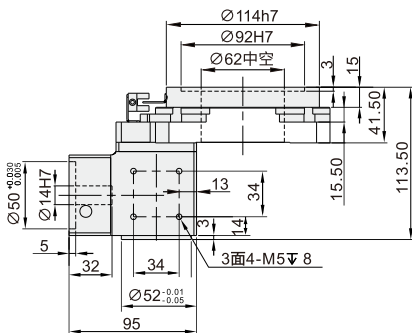


K向视图




ARN130-Z

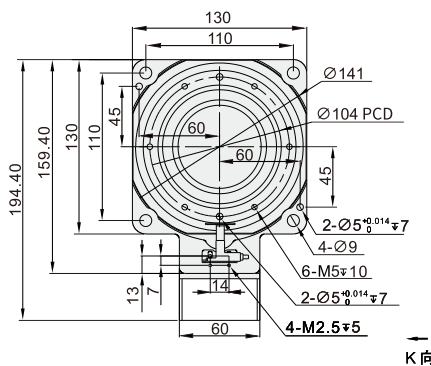

K向

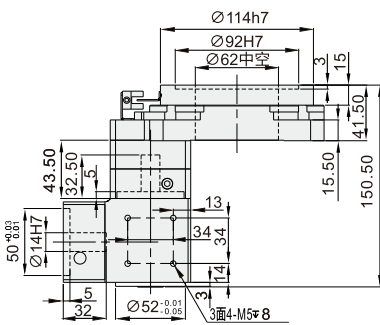


K向视图



旋转平台ARN系列 ◀ 130转台

ARN130-F

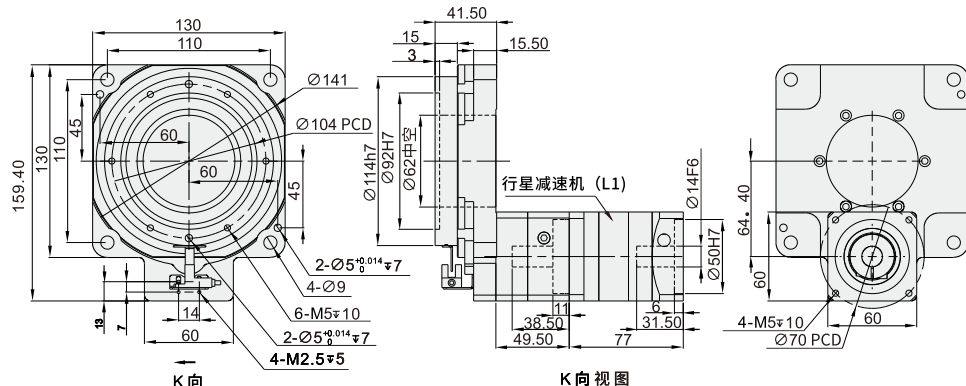

型号	单位	ARN130			ARN130-R/Z			ARN130-F				
适配马达	W	200/400W AC伺服马达 57/60/86步进电机										
旋转平台轴承	/	交叉滚子轴承										
减速比	I	10	18	20	30	50	30	40	50	70	100	
容许扭矩	N.M	60	37	60			60					
容许最大扭矩	N.M	120	74	120			120					
允许盘面转速	r/min	200										
容许轴向负载	N	2000										
容许径向负载	N	2000										
抗扭刚性	Nm/arcmin	7.0										
定位精度	arc-min	±0.5		±0.5			±0.5					
重复定位精度	arc-sec	≤10		≤15			≤15					
旋转平台端面跳动	mm	≤0.01										
旋转平台径向跳动	mm	≤0.01										
旋转平台同心度	mm	≤0.01										
旋转平台平行度	mm	≤0.01										
寿命	h	>20000										
工作温度	℃	-25~+90										
润滑方式	/	合成油脂润滑										
防护等级	IP	IP50										
噪音	dB	≤60		≤62			≤62					
安装方式	/	任意角度										
重量	kg	2.61	2.60	3.90			3.61					

注: 配套其他电机需要提供电机尺寸或者图纸。



请按图示订货

■ ZIT03-ARN130-10-M1

代码	规格型号	减速比	匹配马达尺寸	选配
KZIT03	ARN130 ARN130-R/Z ARN130-F	10	M1:400W松下伺服 M2:400W台达伺服 B1:57步进电机 B2:86步进电机	R:一体式直角换向器 Z:直角换向器 F:行星减速机



交期Delivery

4天 发货

○本产品发货时间不含周日