



# 深沟球轴承 ◀ 非接触式/接触式 带橡胶密封圈经济型



代码	类型	轴承精度	后置代码		轴承材质		密封圈材质
			双面带橡胶密封圈	2RZ (非接触式)	2RS (接触式)	国标	
BK	经济型	GB/T 307-1 0级				GCr15	SUJ2

非接触式橡胶密封圈型

接触式橡胶密封圈型

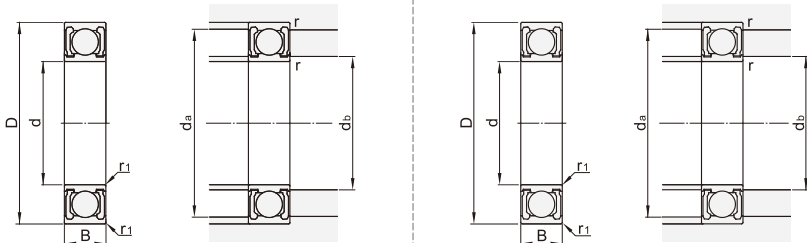

代码	型号		经济型	d	D	B	r <sub>1</sub> (min)	基本额定负载		容许转速 rpm (参考)	安装尺寸				重量 (g) (参考)				
	非接触式 橡胶密封圈式	接触式 橡胶密封圈式						Cr(动) KN	Cor(静) KN		d <sub>b</sub>		d <sub>a</sub> (max)	r (max)					
											(min)	(max)							
BK	6800-2RZ	6800-2RS	E	10	19	5	0.3	1.72	0.84	24000	12	12	17	0.3	5				
	6900-2RZ	6900-2RS			22	6		2.7	1.27			22000	12.5		20	9			
	6000-2RZ	6000-2RS			26	8		4.55	1.96			18000	16		24	18			
	6200-2RZ	6200-2RS			30	9		5.1	2.39				16		26	32			
	6300-2RZ	6300-2RS			35	11		8.1	3.45				17000		16.5	31	52		
	6801-2RZ	6801-2RS			21	5		1.92	1.04			20000	14		19	10			
	6901-2RZ	6901-2RS			24	6		2.89	1.46				14.5		22	10			
	6001-2RZ	6001-2RS			28	8		5.1	2.37				18000		15.5	26	22		
	6201-2RZ	6201-2RS			32	10		6.1	2.75			17000	16		17	28	0.6	37	
	6301-2RZ	6301-2RS			37	12		9.7	4.2			16000	18		32	1	60		
	6802-2RZ	6802-2RS			24	5		2.07	1.26			17000	17		22	15			
	6902-2RZ	6902-2RS			28	7		3.65	2				17		26	15			
	6002-2RZ	6002-2RS			32	9		5.6	2.83				15000		19	30	31		
	6202-2RZ	6202-2RS			35	11		7.65	3.6			14000	19		20.5	31	0.6	45	
	6302-2RZ	6302-2RS			42	13		11.4	5.45			13000	20		22.5	37	1	83	
	6803-2RZ	6803-2RS			26	5		2.63	1.57			15000	19		19	24	19		
	6903-2RZ	6903-2RS			30	7		4.6	2.55						19	19.5	28	0.3	19
	6003-2RZ	6003-2RS			35	10		6	3.25						13000	21	21.5	33	41
	6203-2RZ	6203-2RS			40	12		9.55	4.6			12000	21		23.5	36	0.6	67	
	6303-2RZ	6303-2RS			47	14		13.6	6.65			11000	22		25.5	42	1	113	
	6804-2RZ	6804-2RS			32	7		4	2.47			13000	22		22	30	0.3	17	
	6904-2RZ	6904-2RS			37	9		6.4	3.7			12000			24	24	35	37	
	6004-2RZ	6004-2RS			42	12		9.4	5			11000			24	25.5	38	0.6	68
	6204-2RZ	6204-2RS			47	14		12.8	6.6				25		26.5	42	107		
	6304-2RZ	6304-2RS			52	15		15.9	7.9				26.5		28	45.5	1	145	
	/	63/22-2RS			56	16		18.4	9.25			9500	28.5		30.5	49.5	179		
	6805-2RZ	6805-2RS			37	7		4.5	3.15			10000	27		27	35	0.3	21	
	6905-2RZ	6905-2RS			42	9		7.05	4.55						28.5	40	42		
	6005-2RZ	6005-2RS			47	12		10.1	5.85						9500	29	30	43	0.6
	6205-2RZ	6205-2RS			52	15		14	7.85			9000	30		32	47	129		
	6305-2RZ	6305-2RS			62	17		20.6	11.2			8000	31.5		36	55.5	1	235	
	/	60/28-2RS			52	12		12.5	7.4			8500	32		34	48	0.6	100	
	6806-2RZ	6806-2RS			42	7		4.7	3.65			9000			32	40	0.3	24	
	6906-2RZ	6906-2RS			47	9		7.25	5			8500			34	45	52		
	6006-2RZ	6006-2RS			55	13		13.2	8.3			8000	35		36.5	50	1	116	
	6206-2RZ	6206-2RS			62	16		19.5	11.3			7500			38.5	57	199		
	6306-2RZ	6306-2RS			72	19		26.7	15			6700			36.5	42.5	65.5	345	
	6807-2RZ	6807-2RS			47	7		4.9	4.1			7500	37		37	45	0.3	27	
	6907-2RZ	6907-2RS			55	10		10.6	7.25			7500			39	39	51	0.6	75
	6007-2RZ	6007-2RS			62	14		16	10.3			6700			40	41.5	57	151	
	6207-2RZ	6207-2RS			72	17		25.7	15.3			6300	41.5		44.5	65.5	1	284	
	6307-2RZ	6307-2RS			80	21		33.5	19.2			6000	43		47	72	1.5	464	
	6808-2RZ	/			52	7		6.35	5.55			6700	42		42	50	0.3	31	
	6908-2RZ	6908-2RS			62	12		13.7	10			6300			44	46	58	0.6	112
	6008-2RZ	6008-2RS			68	15		16.8	11.5			6000			45	47.5	63	1	190
	6208-2RZ	6208-2RS			80	18		29.1	17.9			5600	46.5		50.5	73.5	1	366	
	6308-2RZ	6308-2RS			90	23		40.5	24			5300	48		53	82	1.5	636	
	6809-2RZ	6809-2RS			58	7		6.6	6.15			6000	47		47.5	56	0.3	38	
	6909-2RZ	6909-2RS			68	12		14.1	10.9			5600			49	50	64	0.6	126
	6009-2RZ	6009-2RS			75	16		20.9	15.2			5300			50	53.5	70	1	241
	6209-2RZ	6209-2RS			85	19		31.5	20.4				51.5		55.5	78.5	1	420	
	6309-2RZ	6309-2RS			100	25		53	32				4800		53	61.5	92	1.5	829
	6810-2RZ	6810-2RS			65	7		6.4	6.2			5300	52		52.5	63	0.3	50	
	6910-2RZ	6910-2RS			72	12		14.5	11.7				54		55	68	0.6	135	
	6010-2RZ	6010-2RS			80	16		21.8	16.6				4800		55	58.5	75	1	261
	6210-2RZ	6210-2RS			90	20		35	23.2			56.5			60	83.5	1	459	
	6310-2RZ	6310-2RS			110	27		62	38.5			4300			59	68	101	2	1060

# 深沟球轴承 ◀ 非接触式/接触式 带橡胶密封圈经济型

代码	型号		经济型	d	D	B	r <sub>1</sub> (min)	基本额定负载		容许转速 rpm (参考)	安装尺寸			重量 (g) (参考)			
	非接触式 橡胶密封圈式	接触式 橡胶密封圈式						Cr(动) KN	Cor(静) KN		d <sub>b</sub>		d <sub>a</sub> (max)		r (max)		
											(min)	(max)					
BK	6811 -2RZ	/	E	55	72	9	0.3	8.8	8.5	4800	57	59	70	0.3	81		
	6911 -2RZ	6911 -2RS			80	13	1	16	13.3		4500	60	61.5		75	1	189
	/	6011 -2RS			90	18	1.1	28.3	21.2			61.5	64		83.5	1	381
	6211 -2RZ	6211 -2RS			100	21	1.5	43.5	29.3	4300	63	66.5	92	1.5	619		
	6311 -2RZ	6311 -2RS			120	29	2	71.5	44.5		4000	64	72.5		111	2	1370
	6812 -2RZ	/			60	78	10	0.3	11.5	10.9	4500	62	64	76	0.3	103	
	6912 -2RZ	6912 -2RS		85		13	1	19.4	16.3	4300		65	66	80		1	192
	6012 -2RZ	6012 -2RS		95		18	1.1	29.5	23.2			4000	66.5	69		88.5	1
	6212 -2RZ	6212 -2RS		110		22	1.5	52.5	36	3800	68	74.5	102	1.5	783		
	6312 -2RZ	6312 -2RS		130		31	2.1	82	52		3600	71	79		119	2	1720
	6813 -2RZ	/		65		85	10	0.6	11.9	12.1	4000	69	69	81	0.6	128	
	6913 -2RZ	6913 -2RS			90	13	1	17.4	16.1	3600		70	71.5	85		1	218
	6013 -2RZ	6013 -2RS			100	18	1.1	30.5	25.2			71.5	73	93.5		1	439
	6213 -2RZ	6213 -2RS			120	23	1.5	57.5	40	3600	73	80	112	1.5	1000		
	6313 -2RZ	6313 -2RS			140	33	2.1	92.5	60		3400	76	85.5		129	2	2110
	6814 -2RZ	/			70	90	10	0.6	12.1	12.7	3800	74	74.5	86	0.6	134	
	6914 -2RZ	6914 -2RS		100		16	1	23.7	21.2	3600		75	77.5	95		1	349
	6014 -2RZ	6014 -2RS		110		20	1.1	38	31			76.5	80.5	103.5		1	608
	6214 -2RZ	6214 -2RS		125		24	1.5	62	44	3400	78	84	117	1.5	1090		
	6314 -2RZ	6314 -2RS		150		35	2.1	104	68		3200	81	92		139	2	2570
	6815 -2RZ	/		75		95	10	0.6	12.5	13.9	3600	79	79.5	91	0.6	149	
	6915 -2RZ	6915 -2RS			105	16	1	24.4	22.6	3400		80	82	100		1	364
	6015 -2RZ	6015 -2RS			115	20	1.1	39.5	33.5			81.5	85.5	108.5		1	649
	6215 -2RZ	6215 -2RS			130	25	1.5	66	49.5	3200	83	90	122	1.5	1190		
	6315 -2RZ	6315 -2RS			160	37	2.1	113	77		2800	86	98.5		149	2	3080
	6816 -2RZ	/			80	100	10	0.6	12.7	14.5	3400	84	84.5	96	0.6	151	
	6916 -2RZ	6916 -2RS		110		16	1	25	24	3200		85	87.5	105		1	391
	6016 -2RZ	6016 -2RS		125		22	1.1	47.5	40			86.5	91	118.5		1	872
	6216 -2RZ	6216 -2RS		140		26	2	72.5	53	3000	89	95.5	131	2	1420		
	6316 -2RZ	6316 -2RS		170		39	2.1	123	86.5		2800	91	104.5		159	2	3670
	6817 -2RZ	6817 -2RS		85		110	13	1	18.7	20	3200	90	90.5	105	1	263	
	6917 -2RZ	6917 -2RS			120	18	1.1	32	29.6	3000		91.5	94.5	113.5		1	550
	6017 -2RZ	6017 -2RS			130	22	1.5	49.5	43			96	123.5	1		918	
	6217 -2RZ	6217 -2RS			150	28	2	84	62	2800	94	102	141	2	1760		
	6317 -2RZ	6317 -2RS			180	41	3	133	97		2600	98	110.5		167	2.5	4280
	6818 -2RZ	/			90	115	13	1	19	21	3000	95	95.5	110	1	276	
	6918 -2RZ	6918 -2RS		125		18	1.1	33	31.5	2800		96.5	98.5	118.5		1	585
	6018 -2RZ	6018 -2RS		140		24	1.5	58	50			98	103	132		1.5	1190
	6218 -2RZ	6218 -2RS		160		30	2	96	71.5	2600	99	107.5	151	2	2180		
	6819 -2RZ	/		120		13	1	19.3	22		2800	100	101.5		115	1	297
	6919 -2RZ	6919 -2RS		130		18	1.1	33.5	33.5	101.5		103.5	123.5	1	601		
	6019 -2RZ	6019 -2RS		145	24	1.5	60.5	54	2600	103		108.5	137	1.5	1230		
	6219 -2RZ	6219 -2RS		170	32	2.1	109	82		106	114	159	2		2640		
	6319 -2RZ	/		100	200	45	3	153	119	2400	108	123.5	187	2.5	5760		
	6820 -2RZ	/			125	13	1	19.6	23		2800	105	105.5		120	1	310
	6920 -2RZ	6920 -2RS			140	20	1.1	43	42			2600	106.5		111	133.5	1
	6020 -2RZ	6020 -2RS			150	24	1.5	60	54	2200	108	112.5	142	1.5	1290		
	6320 -2RZ	/			215	47	3	173	141		113	133	202		2.5	7040	
	6821 -2RZ	/			105	130	13	1	19.8	23.9	2600	110	110.5	125	1	324	
	6921 -2RZ	6921 -2RS		145		20	1.1	42.5	42	/		111.5	116	138.5		1	856
	6021 -2RZ	/		160		26	2	72.5	66			114	120	151		2	1580
	6822 -2RZ	6822 -2RS		140		16	1	28.1	32.5	2400	115	117	135	1	497		
	6922 -2RZ	/		150		20	1.1	43.5	44.5		116.5	121	143.5		1	893	
	6022 -2RZ	6022 -2RS		170		28	2	85	73	2200	119	124.5	161	2	1940		
	6824 -2RZ	/		150	16	1	28.9	35.5	125		127	145	1		537		
	6924 -2RZ	6924 -2RS		120	165	22	1.1	53	54	/	126.5	132	158.5	1	1210		
	6024 -2RZ	/			180	28	2	88	80		2200	129	134.5		171	2	2080
	6826 -2RZ	/			165	18	1.1	37	44			2000	136.5		138		158.5
	6026 -2RZ	/			200	33	2	106	101	1900	139	148.5	191	2	3260		
	6828 -2RZ	/			175	18	1.1	38.5	48		146.5	148.5	168.5		1	832	
	6928 -2RZ	/			140	190	24	1.5	66.5	72	—	148	153.5	182	1.5	1670	
	6830 -2RZ	/		190		20	1.1	47.5	58.5	1800		156.5	160	183.5		1	1150
	6030 -2RZ	/		225		35	2.1	126	126			161	170	214		2	4240
	6832 -2RZ	/		200		20	1.1	48.5	61	1700	166.5	170.5	193.5	1	1230		
	6032 -2RZ	/		240		38	2.1	137	135		171	181.5	229		2	5150	
	6834 -2RZ	/		170		260	42	2.1	161	161	—	181	194.5	249	2	6890	
	6036 -2RZ	/			225	22	1.1	60.5	78.5	186.5		192	218.5	1		1980	
	6836 -2RZ	/			250	33	2	119	128	189		198.5	241	2		4160	

1KgF=9.81N

# 深沟球轴承 ◀ 非接触式/接触式 带橡胶密封圈经济型

型号		经济型	d	D	B	r1 (min)	基本额定负载		容许转速 rpm (参考)	安装尺寸			重量(g) (参考)
代码	轴承型号						Cr(动) N	Cor(静) N		db (min)	da (max)	r (max)	
	非接触式		接触式										
BK	/	693-2RS	3	8	4	0.15	560	179	30000	4.2	6.8	0.15	0.83
		623-2RS		10			630	210			25000		8.8
		694-2RS	11	960			345	24000	9.8	1.75			
		604-2RS	12	957					5.2	2.29			
	624-2RZ	624-2RS	4	13	5	0.2	1300	485	20000	5.6	10.4	0.2	3.04
	/	695-2RS		4	1080		430	40000			11.4		2.5
	/	605-2RS	5	14	5	0.3	1330	505	38000	6.6	12.4	0.3	3.48
	625-2RZ	625-2RS		16			1730	670			32000		7
	696-2RZ	696-2RS	6	15	6	0.2	1350	530	36000	7.6	13.4	0.2	3.72
	/	606-2RS		17			2260	835			34000		15
	626-2RZ	626-2RS	8	19	7	0.3	2340	885	30000	8	17	0.3	7.94
	698-2RZ	698-2RS					1990	865			10		20
	608-2RZ	608-2RS	8	22	8	0.3	3530	1400	17000	10	20	0.3	12
	628-2RZ	628-2RS		24			4000	1590			14000		22



请按图示订货

## ■ BK-6800-2RZ-E

型号		
代码	轴承型号	经济型
BK	6800-2RZ	E
	6900-2RZ	



交期Delivery

**4天** 发货

○本产品发货时间不含周日



[www.vipdo.cn](http://www.vipdo.cn)



400-098-1117

工厂自动化零件一站式采购平台

汇集国内外知名品牌，让采购更便捷，让设计更高效！