


深沟球轴承 ◀ 法兰型双面带防尘盖



代码	类型	轴承精度	后置代码	轴承材质	
				国标	相当
BFL	标准型	GB/T 307.1 6级	ZZ (双面铁盖密封)	GCr15	SUJ2
SBFL				9Cr18Mo	SUS440C

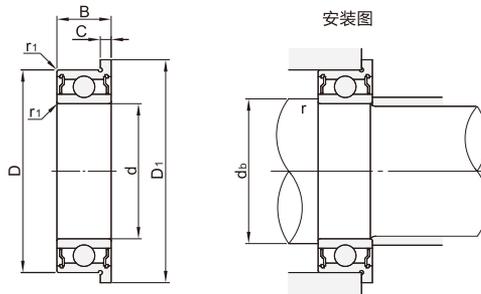

1Kgf=9.81N

型号		d	D	B	D ₁	C	r ₁ (min)	基本额定负载		容许转速 rpm (参考)	安装尺寸		重量 (g) (参考)	
代码	轴承型号							Cr(动)	Cor(静)		d _b (min)	r (max)		
BFL SBFL	682ZZ	2	5	2.3	6.1	0.6	0.08	169	50	85000	2.7	0.08	0.24	
	692ZZ			3	7.5	0.8	0.15	330	99	75000	3	0.15	0.45	
	682AZZ	2.5	6	2.6	7.1	0.8	0.08	209	74	71000	3.7	0.08	0.42	
	692AZZ			3.5	8.5	0.9	0.15	386	129	63000	3.85	0.15	0.68	
	673ZZ	3	6	2.5	7.2	0.6	0.08	242	94	71000	3.6	0.08	0.26	
	683ZZ			7	3	8.1	0.8	0.1	390	130	63000	3.9	0.1	0.53
	693ZZ			8	4	9.5	0.9	0.15	560	180	60000	4.2	0.15	0.72
	603ZZ			9	5	10.5	1	0.15	571	189	56000	4.2	0.15	1.61
	623ZZ	10	4	11.5	1	0.15	640	224	50000	4.2	0.15	1.8		
	674ZZ	4	7	2.5	8.2	0.6	0.08	222	88	60000	4.6	0.08	0.35	
	684ZZ			9	10.3	0.8	0.15	640	224	53000	5	0.1	1.14	
	694ZZ			11	4	12.5	1	0.15	715	276	48000	5.2	0.15	2
	604ZZ			12	13.5	1	0.2	957	350	48000	5.2	0.2	2.57	
	624ZZ	13	5	15	1	0.2	1310	490	40000	5.6	0.2	3.5		
	675ZZ	5	8	2.5	9.2	0.6	0.08	217	91	53000	6.2	0.08	0.4	
	685ZZ			11	5	12.5	1	0.15	715	282	45000	6.2	0.15	2.18
	695ZZ			13	4	15	1	0.2	1080	430	43000	6.6	0.2	2.7
	605ZZ			14	16	1	0.3	1330	505	40000	6.6	0.3	3.9	
	625ZZ	16	5	18	1	0.3	1729	675	36000	7.7	0.3	5.52		
	676ZZ	6	10	3	11.2	0.6	0.1	465	196	45000	6.6	0.1	0.74	
	686ZZ			13	5	15	1.1	0.15	1080	440	40000	7	0.15	3.04
	696ZZ			15	17	1.2	0.2	1350	530	40000	7.6	0.2	4.3	
	606ZZ			17	19	1.2	0.3	2190	865	38000	8	0.3	6.5	
	626ZZ	19	6	22	1.5	0.3	2336	896	32000	8	0.3	9.78		
	678ZZ	8	12	3.5	13.6	0.8	0.1	515	252	40000	8.8	0.1	0.86	
	688ZZ			16	5	18	1.1	0.2	1610	715	36000	9.6	0.2	4.47
	698ZZ			19	6	22	1.5	0.3	1990	865	36000	10	0.3	8.4
	608ZZ			22	7	25	1.5	0.3	3350	1400	34000	10	0.3	13
	6700ZZ	10	15	4	16.5	0.8	0.15	855	435	15000	10.3	0.15	2.1	
	6800ZZ			19	5	21	1	0.3	1716	840	37000	12	0.3	6.1
	6900ZZ			22	6	25	1.5	0.3	2695	1273	34000	13.2	0.3	11.1
	6701ZZ	12	18	4	19.5	0.8	0.2	926	530	13000	12.4	0.2	3.4	
	6801ZZ			21	5	23	1.1	0.3	1915	1041	33000	14	0.3	7.1
	6901ZZ	24	6	26.5	1.5	0.3	2886	1466	31000	14	0.3	13.2		
	6702ZZ	15	21	4	22.5	0.8	0.2	937	582	11000	15.4	0.2	3.9	
	6802ZZ			24	5	26	1.1	0.3	2073	1253	28000	17	0.3	8.3
	6902ZZ			28	7	30.5	1.5	0.3	4321	2259	26000	17	0.3	19.9
	6703ZZ	17	23	4	24.5	0.8	0.2	1000	658	9500	17.4	0.2	4.4	
	6803ZZ			26	5	28	1.1	0.3	2233	1456	26000	19	0.3	8.9
	6903ZZ	30	7	32.5	1.5	0.3	4588	2565	23000	19	0.3	21.4		
6704ZZ	20	27	4	28.5	0.8	0.2	1041	729	8500	20.4	0.2	6.3		
6804ZZ			32	7	35	1.5	0.3	4015	2462	21000	22	0.3	19.8	
6904ZZ			37	9	40	2	0.3	6381	3682	19000	22	0.3	42.8	
6805ZZ	25	37	7	40	1.5	0.3	4303	2932	18000	27	0.3	26.1		
6905ZZ			42	9	45	2	0.3	7001	4540	16000	27	0.3	50.2	

轴承/关节轴承 28



■ BFL-682ZZ

代码	型号	轴承型号
BFL	682ZZ	682ZZ
	692ZZ	692ZZ

请按图示订货



交期Delivery

4天 发货

○本产品发货时间不含周日