



深沟球轴承 ◀ 非接触式/接触式 带橡胶密封圈经济型

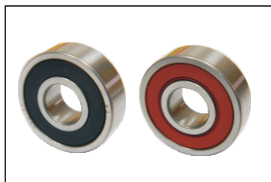


代码	类型	轴承精度	后置代码		轴承材质		密封圈材质
					国标	相当	
BK-E	经济型	GB/T 307-1 0级	双面带橡胶密封圈	2RZ(非接触式) 2RS(接触式)	GCr15	SUJ2	丁晴橡胶

非接触式橡胶密封圈型

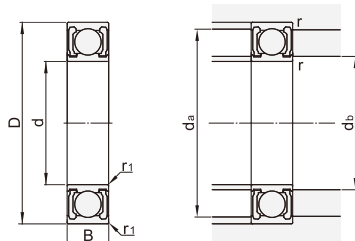

接触式橡胶密封圈型

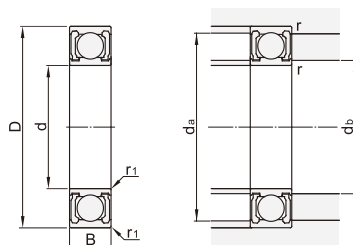

型号			经济型	d	D	B	r ₁ (min)	基本额定负载		容许转速 rpm (参考)	安装尺寸				重量 (g) (参考)	
代码	非接触式 橡胶密封圈式	接触式 橡胶密封圈式						Cr(动) KN			Cor(静) KN	d _b		d _a (max)		r (max)
								(min)	(max)							
BK	6800-2RZ	6800-2RS	10	19	5	0.3	1.72	0.84	24000	12	12	17	0.3	5		
	6900-2RZ	6900-2RS		22	6		2.7	1.27	22000		12.5	20		9		
	6000-2RZ	6000-2RS		26	8		4.55	1.96			24	24		18		
	6200-2RZ	6200-2RS		0.6	30	9	5.1	2.39	18000	16	26	0.6	32			
	6300-2RZ	6300-2RS			35	11	8.1	3.45	17000	16.5	31		52			
	6801-2RZ	6801-2RS			21	5	1.92	1.04	20000	14	19		10			
	6901-2RZ	6901-2RS	24	6	2.89	1.46	14.5	22		10						
	6001-2RZ	6001-2RS	28	8	5.1	2.37	18000	15.5		26	22					
	6201-2RZ	6201-2RS	12	32	10	0.6	6.1	2.75	17000	16	17	28	0.6	37		
	6301-2RZ	6301-2RS		37	12	1	9.7	4.2	16000	18	32	1	60			
	6802-2RZ	6802-2RS		24	5	2.07	1.26	17000	17	22	0.3	15				
	6902-2RZ	6902-2RS	28	7	3.65	2	26		26	15						
	6002-2RZ	6002-2RS	32	9	5.6	2.83	15000		19	30		31				
	6202-2RZ	6202-2RS	15	35	11	0.6	7.65	3.6	14000	19	20.5	31	0.6	45		
	6302-2RZ	6302-2RS		42	13	1	11.4	5.45	13000	20	22.5	37	1	83		
	6803-2RZ	6803-2RS		26	5	2.63	1.57	15000	19	24	0.3	19				
	6903-2RZ	6903-2RS	30	7	4.6	2.55	19.5		28	19						
	6003-2RZ	6003-2RS	35	10	6	3.25	13000		21.5	33		41				
	6203-2RZ	6203-2RS	17	40	12	0.6	9.55	4.6	12000	21	23.5	36	0.6	67		
	6303-2RZ	6303-2RS		47	14	1	13.6	6.65	11000	25.5	42	1	113			
	6804-2RZ	6804-2RS		32	7	0.3	4	2.47	13000	22	22	30	0.3	17		
	6904-2RZ	6904-2RS	37	9	6.4		3.7	12000	24	35	37					
	6004-2RZ	6004-2RS	42	12	0.6		9.4	5	11000	24	25.5	38		0.6	68	
	6204-2RZ	6204-2RS	47	14	1	12.8	6.6	25		26.5	42	1	107			
	6304-2RZ	6304-2RS	52	15	1.1	15.9	7.9	26.5		28	45.5		145			
	/	63/22-2RS	22	56	16	1.1	18.4	9.25	9500	28.5	30.5		49.5	179		
	6805-2RZ	6805-2RS	25	37	7	0.3	4.5	3.15	10000	27	27	35	0.3	21		
	6905-2RZ	6905-2RS		42	9		7.05	4.55		28.5	40	42				
	6005-2RZ	6005-2RS		47	12		0.6	10.1		5.85	9500	29		30	43	0.6
	6205-2RZ	6205-2RS		52	15	1	14	7.85	9000	30	32	47	1	129		
	6305-2RZ	6305-2RS		62	17	1.1	20.6	11.2	8000	31.5	36	55.5		235		
	/	60/28-2RS		28	52	12	0.6	12.5	7.4	8500	34	48	0.6	100		
	6806-2RZ	6806-2RS	30	42	7	0.3	4.7	3.65	9000	32	32	40	0.3	24		
	6906-2RZ	6906-2RS		47	9		7.25	5	8500	34	45	52				
	6006-2RZ	6006-2RS		55	13		13.2	8.3	8000	35	36.5	50		116		
	6206-2RZ	6206-2RS		62	16	19.5	11.3	7500	38.5	57	199					
	6306-2RZ	6306-2RS	35	72	19	1.1	26.7	15	6700	36.5	42.5	65.5	345			
	6807-2RZ	6807-2RS		47	7	0.3	4.9	4.1	7500	37	37	45	0.3	27		
	6907-2RZ	6907-2RS		55	10	0.6	10.6	7.25	7500	39	39	51	0.6	75		
	6007-2RZ	6007-2RS	40	62	14	1	16	10.3	6700	40	41.5	57	1	151		
	6207-2RZ	6207-2RS		72	17	1.1	25.7	15.3	6300	41.5	44.5	65.5		284		
	6307-2RZ	6307-2RS		80	21	1.5	33.5	19.2	6000	43	47	72		1.5	464	
	6808-2RZ	/	40	52	7	0.3	6.35	5.55	6700	42	42	50	0.3	31		
	6908-2RZ	6908-2RS		62	12	0.6	13.7	10	6300	44	46	58	0.6	112		
	6008-2RZ	6008-2RS		68	15	1	16.8	11.5	6000	45	47.5	63	1	190		
	6208-2RZ	6208-2RS		80	18	1.1	29.1	17.9	5600	46.5	50.5	73.5		366		
	6308-2RZ	6308-2RS		90	23	1.5	40.5	24	5300	48	53	82		1.5	636	
	6809-2RZ	6809-2RS	45	58	7	0.3	6.6	6.15	6000	47	47.5	56	0.3	38		
	6909-2RZ	6909-2RS		68	12	0.6	14.1	10.9	5600	49	50	64	0.6	126		
	6009-2RZ	6009-2RS		75	16	1	20.9	15.2	5300	50	53.5	70	1	241		
	6209-2RZ	6209-2RS		85	19	1.1	31.5	20.4		51.5	55.5	78.5		420		
	6309-2RZ	6309-2RS		100	25	1.5	53	32		4800	53	61.5		92	1.5	829
	6810-2RZ	6810-2RS	50	65	7	0.3	6.4	6.2	5300	52	52.5	63	0.3	50		
	6910-2RZ	6910-2RS		72	12	0.6	14.5	11.7		54	55	68	0.6	135		
	6010-2RZ	6010-2RS		80	16	1	21.8	16.6		55	58.5	75	1	261		
	6210-2RZ	6210-2RS		90	20	1.1	35	23.2	56.5	60	83.5	459				
	6310-2RZ	6310-2RS		110	27	2	62	38.5	4300	59	68	101		2	1060	

深沟球轴承 ◀ 非接触式/接触式 带橡胶密封圈经济型

型号			经济型	d	D	B	r ₁ (min)	基本额定负载		容许转速 rpm (参考)	安装尺寸				重量 (g) (参考)
代码	非接触式 橡胶密封圈式	接触式 橡胶密封圈式						Cr(动) KN	Cor(静) KN		d _b		d _a (max)	r (max)	
											(min)	(max)			
BK	6811 -2RZ	/	55	72	9	0.3	8.8	8.5	4800	57	59	70	0.3	81	
	6911 -2RZ	6911 -2RS		80	13	1	16	13.3	4500	60	61.5	75	1	189	
	/	6011 -2RS		90	18	1.1	28.3	21.2		61.5	64	83.5		381	
	6211 -2RZ	6211 -2RS		100	21	1.5	43.5	29.3		4300	63	66.5	92	1.5	619
	6311 -2RZ	6311 -2RS		120	29	2	71.5	44.5	4000	64	72.5	111	2	1370	
	6812 -2RZ	/	60	78	10	0.3	11.5	10.9	4500	62	64	76	0.3	103	
	6912 -2RZ	6912 -2RS		85	13	1	19.4	16.3	4300	65	66	80		192	
	6012 -2RZ	6012 -2RS		95	18	1.1	29.5	23.2	4000	66.5	69	88.5	1	412	
	6212 -2RZ	6212 -2RS		110	22	1.5	52.5	36	3800	68	74.5	102	1.5	783	
	6312 -2RZ	6312 -2RS		130	31	2.1	82	52	3600	71	79	119	2	1720	
	6813 -2RZ	/	65	85	10	0.6	11.9	12.1	4000	69	69	81	0.6	128	
	6913 -2RZ	6913 -2RS		90	13	1	17.4	16.1		70	71.5	85		218	
	6013 -2RZ	6013 -2RS		100	18	1.1	30.5	25.2		71.5	73	93.5	1	439	
	6213 -2RZ	6213 -2RS		120	23	1.5	57.5	40	3600	73	80	112	1.5	1000	
	6313 -2RZ	6313 -2RS		140	33	2.1	92.5	60	3400	76	85.5	129	2	2110	
	6814 -2RZ	/	70	90	10	0.6	12.1	12.7	3800	74	74.5	86	0.6	134	
	6914 -2RZ	6914 -2RS		100	16	1	23.7	21.2	3600	75	77.5	95		349	
	6014 -2RZ	6014 -2RS		110	20	1.1	38	31		76.5	80.5	103.5	1	608	
	6214 -2RZ	6214 -2RS		125	24	1.5	62	44	3400	78	84	117	1.5	1090	
	6314 -2RZ	6314 -2RS		150	35	2.1	104	68	3200	81	92	139	2	2570	
	6815 -2RZ	/	75	95	10	0.6	12.5	13.9	3600	79	79.5	91	0.6	149	
	6915 -2RZ	6915 -2RS		105	16	1	24.4	22.6	3400	80	82	100		364	
	6015 -2RZ	6015 -2RS		115	20	1.1	39.5	33.5		81.5	85.5	108.5	1	649	
	6215 -2RZ	6215 -2RS		130	25	1.5	66	49.5	3200	83	90	122	1.5	1190	
	6315 -2RZ	6315 -2RS		160	37	2.1	113	77	2800	86	98.5	149	2	3080	
	6816 -2RZ	/	80	100	10	0.6	12.7	14.5	3400	84	84.5	96	0.6	151	
	6916 -2RZ	6916 -2RS		110	16	1	25	24	3200	85	87.5	105		391	
	6016 -2RZ	6016 -2RS		125	22	1.1	47.5	40		86.5	91	118.5	1	872	
	6216 -2RZ	6216 -2RS		140	26	2	72.5	53	3000	89	95.5	131		1420	
	6316 -2RZ	6316 -2RS		170	39	2.1	123	86.5	2800	91	104.5	159	2	3670	
	6817 -2RZ	6817 -2RS	85	110	13	1	18.7	20	3200	90	90.5	105		263	
	6917 -2RZ	6917 -2RS		120	18		32	29.6	3000	91.5	94.5	113.5	1	550	
	6017 -2RZ	6017 -2RS		130	22	1.1	49.5	43			96	123.5		918	
	6217 -2RZ	6217 -2RS		150	28	2	84	62	2800	94	102	141	2	1760	
	6317 -2RZ	6317 -2RS		180	41	3	133	97	2600	98	110.5	167	2.5	4280	
	6818 -2RZ	/	90	115	13	1	19	21	3000	95	95.5	110		276	
	6918 -2RZ	6918 -2RS		125	18	1.1	33	31.5	2800	96.5	98.5	118.5	1	585	
	6018 -2RZ	6018 -2RS		140	24	1.5	58	50		98	103	132	1.5	1190	
	6218 -2RZ	6218 -2RS		160	30	2	96	71.5	2600	99	107.5	151	2	2180	
	6819 -2RZ	/	95	120	13	1	19.3	22	2800	100	101.5	115		297	
	6919 -2RZ	6919 -2RS		130	18	1.1	33.5	33.5		101.5	103.5	123.5	1	601	
	6019 -2RZ	6019 -2RS		145	24	1.5	60.5	54		103	108.5	137	1.5	1230	
	6219 -2RZ	6219 -2RS		170	32	2.1	109	82	2600	106	114	159	2	2640	
	6319 -2RZ	/	100	200	45	3	153	119	2400	108	123.5	187	2.5	5760	
	6820 -2RZ	/		125	13	1	19.6	23	2800	105	105.5	120		310	
	6920 -2RZ	6920 -2RS		140	20	1.1	43	42	2600	106.5	111	133.5	1	828	
	6020 -2RZ	6020 -2RS		150	24	1.5	60	54		108	112.5	142	1.5	1290	
	6320 -2RZ	/		215	47	3	173	141	2200	113	133	202	2.5	7040	
	6821 -2RZ	/	105	130	13	1	19.8	23.9	2600	110	110.5	125		324	
	6921 -2RZ	/		145	20	1.1	42.5	42	/	111.5	116	138.5	1	856	
	6021 -2RZ	/		160	26	2	72.5	66		114	120	151	2	1580	
	6222 -2RZ	6822 -2RS		140	16	1	28.1	32.5		115	117	135		497	
	6922 -2RZ	/	110	150	20	1.1	43.5	44.5	2400	116.5	121	143.5	1	893	
	6022 -2RZ	6022 -2RS		170	28	2	85	73		119	124.5	161	2	1940	
	6824 -2RZ	/		150	16	1	28.9	35.5		125	127	145		537	
	6924 -2RZ	6924 -2RS	120	165	22	1.1	53	54	/	126.5	132	158.5	1	1210	
	6024 -2RZ	/		180	28	2	88	80		129	134.5	171	2	2080	
	6826 -2RZ	/		165	18	1.1	37	44		136.5	138	158.5	1	758	
	6026 -2RZ	/	130	200	33	2	106	101	1900	139	148.5	191	2	3260	
	6828 -2RZ	/		175	18	1.1	38.5	48		146.5	148.5	168.5	1	832	
	6928 -2RZ	/		190	24	1.5	66.5	72	—	148	153.5	182	1.5	1670	
	6830 -2RZ	/	150	190	20	1.1	47.5	58.5	1800	156.5	160	183.5	1	1150	
	6030 -2RZ	/		225	35	2.1	126	126	1700	161	170	214	2	4240	
	6832 -2RZ	/		200	20	1.1	48.5	61		166.5	170.5	193.5	1	1230	
	6032 -2RZ	/	160	240	38		137	135		171	181.5	229		5150	
	6834 -2RZ	/		260	42		161	161	1600	181	194.5	249	2	6890	
	6836 -2RZ	/		225	22	1.1	60.5	78.5		—	186.5	192	218.5	1	1980
	6936 -2RZ	/		250	33	2	119	128		189	198.5	241	2	4160	

1Kg=9.81N



深沟球轴承 ◀ 非接触式/接触式 带橡胶密封圈经济型

型号		经济型	d	D	B	r ₁ (min)	基本额定负载		容许转速 rpm (参考)	安装尺寸			重量 (g) (参考)
代码	轴承型号						Cr(动) N	Cor(静) N		d _b (min)	d _a (max)	r (max)	
	非接触式												
BK	/	693-2RS	3	8	4	0.15	560	179	30000	4.2	6.8	0.15	0.83
		623-2R5		10			630	210	25000		8.8		1.66
		694-2RS	4	11		0.2	960	345	24000	5.2	9.8	0.2	1.75
		604-2RS		12			957			10.4	2.29		
	624-2RZ	624-2RS	5	13	5	0.3	1300	485	20000	6.6	11.4	0.3	3.04
	695-2RS	14		1080			430	40000	12.4		2.5		
	/	605-2RS	6	16	6	0.2	1330	505	38000	7	14	0.2	3.48
	625-2RZ	625-2RS		15			1730	670	32000		13.4		4.86
	696-2RZ	696-2RS	8	17	7	0.2	1350	530	36000	7.6	13.4	0.2	3.72
	/	606-2RS		19			2260	835	34000		15		6.08
	626-2RZ	626-2RS		19	6	0.3	2340	885	30000	8	17	0.3	7.94
	698-2RZ	698-2RS					1990	865					7.18
	608-2RZ	608-2RS		22	7	0.3	3530	1400	17000	10	20	0.3	12
	628-2RZ	628-2RS					24	8	4000		1590		14000



请按图示订货

■ BK-6800-2RZ-E

型号		
代码	轴承型号	经济型
BK	6800-2RZ	E
	6900-2RZ	



交期Delivery

4天

发货

○本产品发货时间不含周日

