


减震型联轴器 ◀ 螺钉夹紧型/标准型/加长型/短型



代码	类型	材质		附件
		主体	间隔环	
CJK11	螺钉夹紧型	铝合金	FKM	内六角圆柱头螺钉
CJK12				
CJK13				

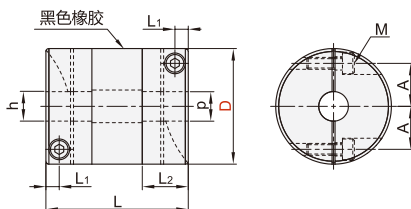

型号	h-p									
代码 D										
标准型 CJK11	15	h	3	4	4.5	5	6			
		p	5	6	4	5	6			
	19	h	4	5	6	6.35	8			
		p	5	8	5	6	7	8	8	
	25	h	5	6	6.35	8				
		p	6	8	10	11	12	8	10	12
	30	h	8		10			11	12	14
		p	8	10	11	12	14	15	16	17
	34	h	8		10			11	12	14
		p	8	10	11	12	14	15	16	17
	39	h	10		12			14	15	16
		p	10	11	12	14	15	16	17	20
短型 CJK13	25	h	5	6	6.35	8				
		p	6	8	10	11	12	8	10	12
	30	h	8		10			11	12	14
		p	8	10	11	12	14	15	16	17

型号	h-p									
代码 D										
标准型 CJK11	15	h	3	4	4.5	5	6			
		p	5	6	4	5	6			
	19	h	4	5	6	6.35	8			
		p	5	8	5	6	7	8	8	
	25	h	5	6	6.35	8				
		p	6	8	10	11	12	8	10	12
	30	h	8		10			11	12	14
		p	8	10	11	12	14	15	16	17
	34	h	8		10			11	12	14
		p	8	10	11	12	14	15	16	17
	39	h	10		12			14	15	16
		p	10	11	12	14	15	16	17	20
短型 CJK13	25	h	5	6	6.35	8				
		p	6	8	10	11	12	8	10	12
	30	h	8		10			11	12	14
		p	8	10	11	12	14	15	16	17

型号	h-p									
代码 D										
加长型 CJK12	15	h	4	5						
		p	5	6						
	19	h	4	5	6	6.35	8			
		p	5	8	10	11	12	8	10	12
	25	h	5	6	6.35	8				
		p	6	8	10	11	12	8	10	12

型号	h-p									
代码 D										
加长型 CJK12	30	h	8		10			11	12	
		p	8	10	11	12	14	15	16	17
	34	h	8		10			11	12	14
		p	8	10	11	12	14	15	16	17
	39	h	10		12			14	15	16
		p	10	11	12	14	15	16	17	20

型号												容许安装偏差			重量 (g)	
代码	D	L	L ₁	L ₂	A	M	锁紧扭矩 (N·m)	额定扭矩 (N·m)	最大扭矩 (N·m)	最高转速 (r/min)	惯性力矩 (kg·m ²)	静态扭转 刚性 (N·m/rad)	径向 (mm)	角向 (°)		轴向 (mm)
标准型 CJZ11	15	23	2.15	6.5	5	M1.6	0.25	1.1	2.2	42000	2.6×10 ⁻⁷	110	0.15	±0.2	9	
	19	26	2.65	7.7	6.5	M2	0.5	2.1	4.2	33000	7.6×10 ⁻⁷	240			15	
	25	32	3.25	9.5	9	M2.5	1	4	8	25000	2.7×10 ⁻⁶	390			29	
	30	36	4	11	11	M3	1.5	6.3	12.6	21000	6.3×10 ⁻⁶	590			45	
	34	38		12	12.25			8	16	18000	1.2×10 ⁻⁵	890	66			
	39	45	4.5	15.5	14.5	M4	2.5	13.5	27	16000	2.5×10 ⁻⁵	1100	0.2	±0.3	105	
	44	48	4.75	15	16			18	36	14000	4.1×10 ⁻⁵	1300			34	
	56	60	5.5	19.5	20	M5	7	35	70	11000	1.4×10 ⁻⁴	2500	270			
加长型 CJZ12	15	30	2.15	6.5	5	M1.6	0.25	1.1	2.2	42000	3.6×10 ⁻⁷	82	0.15	±0.2	11	
	19	34	2.65	7.7	6.5	M2	0.5	2.1	4.2	33000	1×10 ⁻⁷	210			20	
	25	42	3.25	9.5	9	M2.5	1	4	8	25000	3.8×10 ⁻⁶	300			40	
	30	42	4	11	11	M3	1.5	6.3	12.6	21000	7.6×10 ⁻⁶	540			0.2	±0.3
	34	44		12	12.25			8	16	18000	1.4×10 ⁻⁵	640	78			
	39	55	4.5	15.5	14.5	M4	2.5	13.5	27	16000	2.9×10 ⁻⁵	950	122			
	短型 CJZ13	15	18	2.15	6.5	5	M1.6	0.25	0.5	1	42000	2.1×10 ⁻⁷	64	0.15	±0.2	7
		19	20	2.65	7.7	6.5	M2	0.5	0.8	1.6	33000	5.9×10 ⁻⁷	170			12
25		27	3.25	9.5	9	M2.5	1	2.3	4.6	25000	2.4×10 ⁻⁶	290	24			
30		30	4	11	11	M3	1.5	3.3	6.6	21000	5.2×10 ⁻⁶	430	0.2			±0.3
34		35		12	12.25			5.5	1	18000	1.1×10 ⁻⁵	800		61		
39		40	4.5	15.5	14.5	M4	2.5	7	14	16000	2.1×10 ⁻⁵	930	90			



请按图示订货

■ CJK11-D15-h3-p5

型号	h-p	
代码 D		
标准型 CJK11	15	h 3 p 5 6



交期Delivery

6 天 发货

○ 本产品发货时间不含周日

联轴器

14