


HIWIN直线导轨◀HG系列-HGW-CA/HGW-HA 重载型

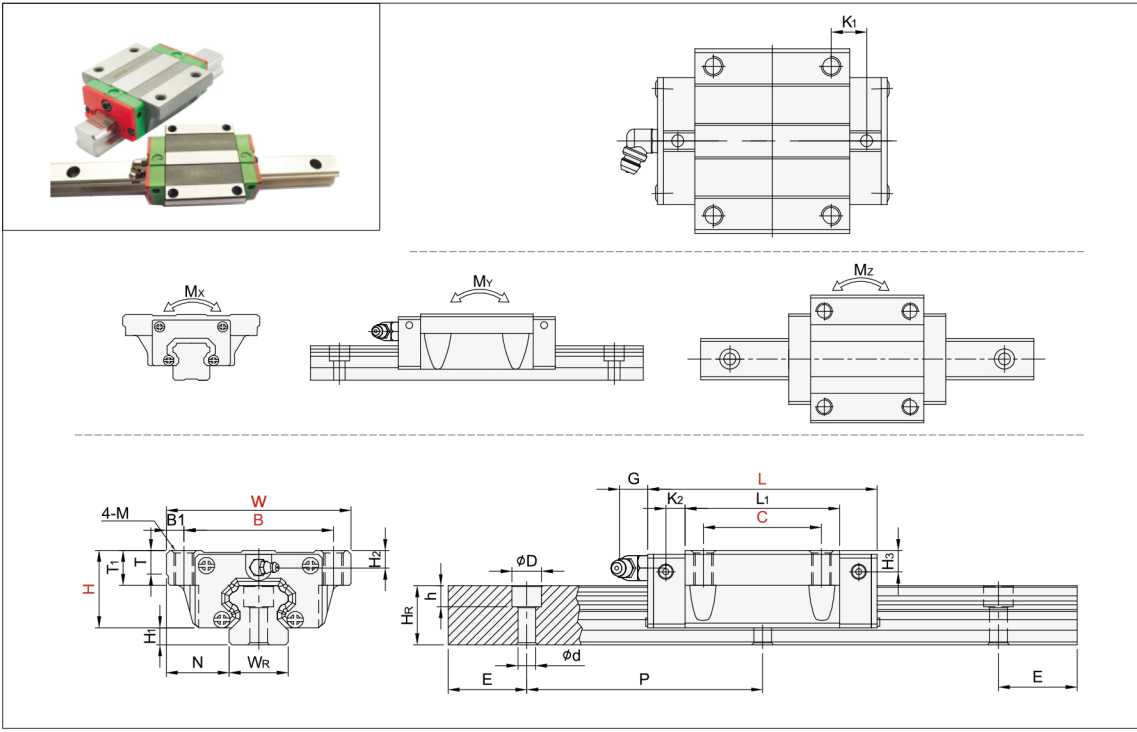


型号	组装规格(mm)						滑块尺寸(mm)														导轨尺寸									
	H	H ₁	N	W	B	B ₁	C	L ₁	L	K ₁	K ₂	G	M	T	T ₁	H ₂	H ₃	W _R	H _R	D	h	d	P	E						
HGW15CA	24	4.3	16	47	38	4.5	30	39.4	61.4	8	4.85	5.3	M5	6	8.9	3.95	3.7	15	15	7.5	5.3	4.5	60	20						
HGW20CA	30	4.6	21.5	63	53	5	40	50.5	77.5	10.25		6	12	M6	8	10	6	6	20	17.5	9.5	8.5	6	60	20					
HGW20HA								65.2	92.2	17.6																				
HGW25CA	36	5.5	23.5	70	57	6.5	45	58	84	10.7	6	12	M8	8	14	6	5	23	22	11	9	7	60	20						
HGW25HA								78.6	104.6	21																				
HGW30CA	42	6	31	90	72	9	52	70	97.4	14.25	6	12	M10	8.5	16	6.5	10.8	28	26	14	12	9	80	20						
HGW30HA								93	120.4	25.75																				
HGW35CA	48	7.5	33	100	82	9	62	80	112.4	14.6	7	12	M10	10.1	18	9	12.6	34	29	14	12	9	80	20						
HGW35HA								105.8	138.2	27.5																				
HGW45CA	60	9.5	37.5	120	100	10	80	97	139.4	13	10	12.9	M12	15.1	22	8.5	20.5	45	38	20	17	14	105	22.5						
HGW45HA								128.8	171.2	28.9																				
HGW55CA	70	13	43.5	140	116	12	95	117.7	166.7	17.35	11	12.9	M14	17.5	26.5	12	19	53	44	23	20	16	120	30						
HGW55HA								155.8	204.8	36.4																				
HGW65CA	90	15	53.5	170	142	14	110	144.2	200.2	23.1	14	12.9	M16	25	37.5	15	15	63	53	26	22	18	150	35						
HGW65HA								203.6	259.6	52.8																				

型号	滑轨的固定螺栓尺寸 (mm)	基本动额定负荷 C(KN)	基本静额定负荷 C ₀ (KN)	容许静力矩			重量	
				M _R (kN-m)	M _p (kN-m)	M _v (kN-m)	滑块kg	导轨kg/m
HGW15CA	M4×16	14.7	23.47	0.12	0.10	0.10	0.17	1.45
HGW20CA	M5×16	27.1	36.68	0.27	0.20	0.20	0.40	2.21
HGW20HA		32.7	47.96	0.35	0.35	0.35	0.52	
HGW25CA	M6×20	34.9	52.82	0.42	0.33	0.33	0.59	3.21
HGW25HA		42.2	69.07	0.56	0.57	0.57	0.80	
HGW30CA	M8×25	48.5	71.87	0.66	0.53	0.53	1.09	4.47
HGW30HA		58.6	93.99	0.88	0.92	0.92	1.44	
HGW35CA	M8×25	64.6	93.88	1.16	0.81	0.81	1.56	6.30
HGW35HA		77.9	122.77	1.54	1.40	1.40	2.06	
HGW45CA	M12×35	103.8	146.71	1.98	1.55	1.55	2.79	10.41
HGW45HA		125.3	191.85	2.63	2.68	2.68	3.69	
HGW55CA	M14×45	153.2	211.23	3.69	2.64	2.64	4.52	15.08
HGW55HA		184.9	276.23	4.88	4.57	4.57	5.96	
HGW65CA	M16×50	213.2	287.48	6.65	4.27	4.27	9.17	21.18
HGW65HA		277.8	420.17	9.38	7.38	7.38	12.89	

www.vipdo.cn 400-098-1117 工厂自动化零件一站式采购平台

汇集国内外知名品牌，让采购更便捷，让设计更高效！

HIWIN直线导轨◀HG系列-HGW-CC/HGW-HC 重载型

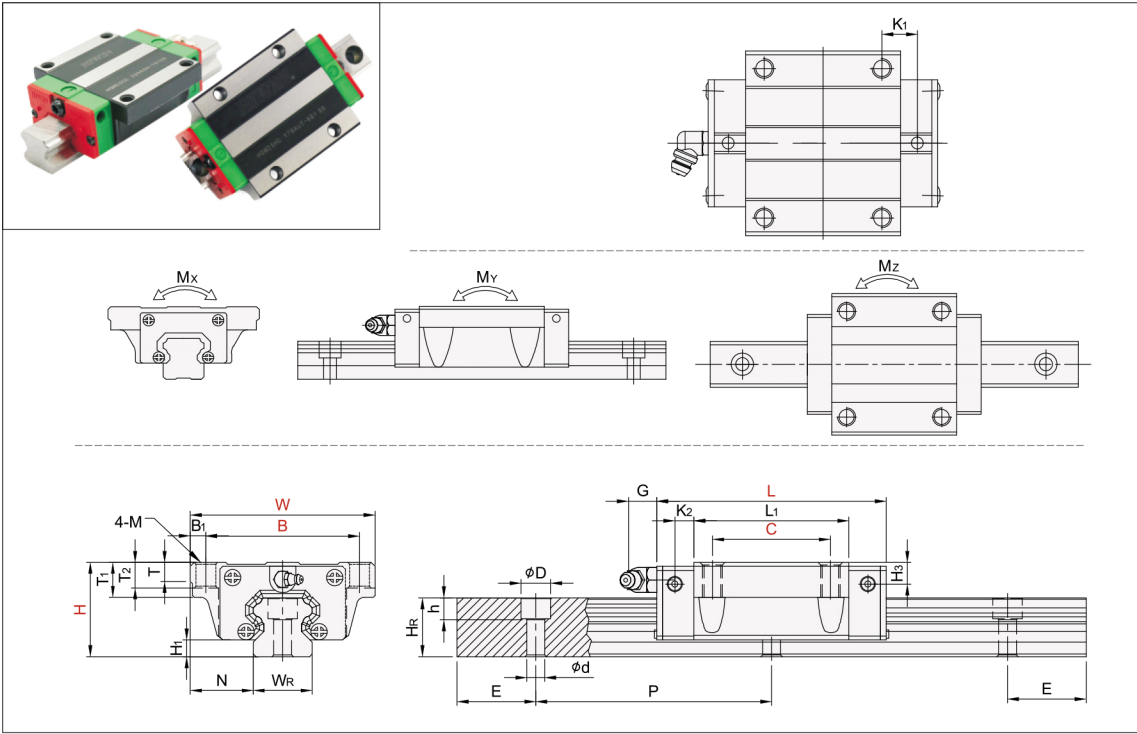

型号	组装规格(mm)						滑块尺寸(mm)														导轨尺寸									
	H	H ₁	N	W	B	B ₁	C	L ₁	L	K ₁	K ₂	G	M	T	T ₁	T ₂	H ₂	H ₃	W _R	H _R	D	h	d	P	E					
HGW15CC	24	4.3	16	47	38	4.5	30	39.4	61.4	8	4.85	5.3	M5	6	8.9	6.95	3.95	3.7	15	15	7.5	5.3	4.5	60	20					
HGW20CC	30	4.6	21.5	63	53	5	40	50.5	77.5	10.25	6	12	M6	8	10	9.5	6	6	20	17.5	9.5	8.5	6	60	20					
HGW20HC								65.2	92.2	17.6																				
HGW25CC	36	5.5	23.5	70	57	6.5	45	58	84	10.7	6	12	M8	8	14	10	6	5	23	22	11	9	7	60	20					
HGW25HC								78.6	104.6	21																				
HGW30CC	42	6	31	90	72	9	52	70	97.4	14.25	6	12	M10	8.5	16	10	6.5	10.8	28	26	14	12	9	80	20					
HGW30HC								93	120.4	25.75																				
HGW35CC	48	7.5	33	100	82	9	62	80	112.4	14.6	7	12	M10	10.1	18	13	9	12.6	34	29	14	12	9	80	20					
HGW35HC								105.8	138.2	27.5																				
HGW45CC	60	9.5	37.5	120	100	10	80	97	139.4	13	10	12.9	M12	15.1	22	15	8.5	20.5	45	38	20	17	14	105	22.5					
HGW45HC								128.8	171.2	28.9																				
HGW55CC	70	13	43.5	140	116	12	95	117.7	166.7	17.35	11	12.9	M14	17.5	26.5	17	12	19	53	44	23	20	16	120	30					
HGW55HC								155.8	204.8	36.4																				
HGW65CC	90	15	53.5	170	142	14	110	144.2	200.2	23.1	14	12.9	M16	25	37.5	23	15	15	63	53	26	22	18	150	35					
HGW66HC								203.6	259.6	52.8																				

型号	滑轨的固定螺栓尺寸 (mm)	基本动额定负荷 C(KN)	基本静额定负荷 C ₀ (KN)	容许静力矩			重量	
				M _R (kN-m)	M _p (kN-m)	M _y (kN-m)	滑块kg	导轨kg/m
HGW15CC	M4×16	14.7	23.47	0.12	0.10	0.10	0.17	1.45
HGW20CC	M5×16	27.1	36.68	0.27	0.20	0.20	0.40	2.21
HGW20HC		32.7	47.96	0.35	0.35	0.35	0.52	
HGW25CC	M6×20	34.9	52.82	0.42	0.33	0.33	0.59	3.21
HGW25HC		42.2	69.07	0.56	0.57	0.57	0.80	
HGW30CC	M8×25	48.5	71.87	0.66	0.53	0.53	1.09	4.47
HGW30HC		58.6	93.99	0.88	0.92	0.92	1.44	
HGW35CC	M8×25	64.6	93.88	1.16	0.81	0.81	1.56	6.30
HGW35HC		77.9	122.77	1.54	1.40	1.40	2.06	
HGW45CC	M12×35	103.8	146.71	1.98	1.55	1.55	2.79	10.41
HGW45HC		125.3	191.85	2.63	2.68	2.68	3.69	
HGW55CC	M14×45	153.2	211.23	3.69	2.64	2.64	4.52	15.08
HGW55HC		184.9	276.23	4.88	4.57	4.57	5.96	
HGW65CC	M16×50	213.2	287.48	6.65	4.27	4.27	9.17	21.18
HGW66HC		277.8	420.17	9.38	7.38	7.38	12.89	