



免键高扭矩圆弧齿同步带轮 ◀ S3M型(齿距3.0)带定心功能



型号		材质			表面处理		
皮带宽度10mm	皮带宽 15mm	带轮	法兰	衬套	带轮	法兰	衬套
A : 11 W : 15	A : 27 W : 32						
VAD21□□S3M100	VAD31□□S3M150				本色阳极氧化		/
VAD23□□S3M100	VAD33□□S3M150	铝合金	铝合金	S45C	本色阳极氧化		/
VAD24□□S3M100	VAD34□□S3M150				无电解镀镍		/

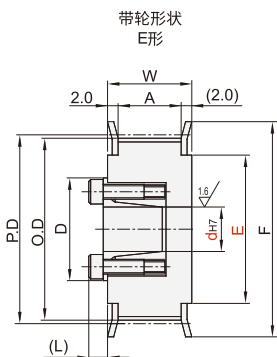

■Y尺寸: S3M150时, Y=14

型号		带轮形状	轴孔规格 dH7(根据胀套孔径表选择)			P.D.	O.D.	F	E	A	W	
代码	齿数		S3M100	S3M150								
VAD21-S3M 100 VAD23-S3M 100 VAD24-S3M 100	34	E F	E形	E形	F形	32.47	31.71	40	28	S3M100 A: 11 W: 15		
	38		6	6	6	34.38	33.62					
	40		8	8	8	38.2	37.44				44	32
	44		8 10	8.10	8 10	42.02	41.25				48	36
	48		8 10	8.10 .12	8 10	45.84	45.07				50	38
VAD31-S3M 150 VAD33-S3M 150 VAD34-S3M 150	60		8 10	8.10 .12 14-17	8 10	47.75	46.98	52	40		S3M150 A: 17 W.21	
72	8 10		8.10 .12 14-19	8 10	68.75	67.99	74	58				

同步带

14

胀套孔径尺寸

dH7	容许最大扭矩 N.M	D	L
6	12.7	21.5	6
8	19.6	23.5	
10	27.5	25.5	
12	44.1	28.5	
14	63.7	30.5	
15	80.4	31.5	6.5
16	83.3	33	
17	92.2	33.5	
18	95.1	34.5	
19	98.1	35.5	



■ VAD21-S3M100-34-E-d8

代码	齿数	带轮形状	轴孔规格d H7	
			S3M100	S3M150
VAD21-S3M100	34	E	E	
	36	F		8



交期Delivery

7天 发货

○本产品发货时间不含周日



www.vipdo.cn



400-098-1117

工厂自动化零件一站式采购平台