

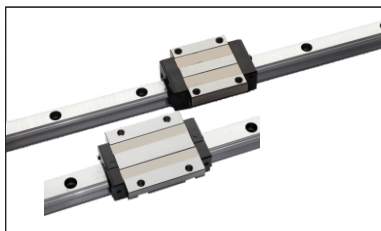
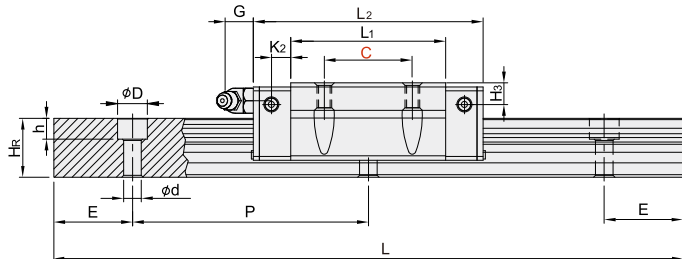

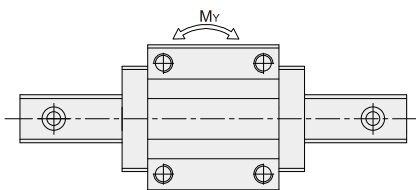



AA 滚珠型直线导轨 ◀ ANH 系列-ANH-B/ANH-BL

直线导轨
20



代码	类型	滑块固定方式	滑块数量	材质	导轨固定方式
LAA11	组件	上锁式	单滑块	合金钢	上锁式
LAA12			双滑块		



代码	型号	组装规格(mm)			滑块尺寸(mm)															导轨尺寸									
		H	H ₁	N	W	B	B ₁	C	L ₁	L ₂	K ₁	K ₂	G	M	T	T ₁	H ₂	H ₃	W _R	H _R	D	h	d	P	E				
LAA11 LAA12	ANH15A	24	4.3	16	47	38	4.5	30	39.4	61.4	8	4.85	5.3	M5	6	8.9	3.95	3.7	15	15	7.5	5.3	4.5	60	见 AN 端 参 数 表				
	ANH20A	30	4.6	21.5	63	53	5	40	50.5	77.5	10.25	6	12	M6	8	10	6	6	20	17.5	9.5	8.5	6	60					
	ANH20AL								65.2	92.2	17.6																		
	ANH25A	36	5.5	23.5	70	57	6.5	45	58	84	11.8	6	12	M8	8	14	6	5	23	22	11	9	7	60					
	ANH25AL								78.6	104.6	22.1																		
	ANH30A	42	6	31	90	72	9	52	70	97.4	14.25	6	12	M10	8.5	16	6.5	10.8	28	26	14	12	9	80					
	ANH30AL								93.0	120.4	25.75																		
	ANH35A	48	7.5	33	100	82	9	62	80	112.4	14.6	7	12	M10	10.1	18	9	12.6	34	29	14	12	9	80					
	ANH35AL								105.8	138.2	27.5																		
	ANH45A	60	9.5	37.5	120	100	10	80	97	139.4	13	10	12.9	M12	15.1	22	8.5	20.5	45	38	20	17	14	105					
ANH45AL	128.8								171.2	28.9																			

代码	型号	滑轨的固定 螺栓尺寸 (mm)	基本动额定负荷 C(KN)	基本静额定负荷 Co(KN)	容许静力矩			重量	
					MR (kN-m)	Mp (kN-m)	Mv (kN-m)	滑块kg	滑轨kg/m
LAA11 LAA12	ANH15A	M4×16	11.38	16.97	0.12	0.1	0.1	0.17	1.45
	ANH20A	M5×16	17.75	27.76	0.27	0.2	0.2	0.40	2.21
	ANH20AL		21.18	35.9	0.35	0.35	0.35	0.52	
	ANH25A	M6×20	26.48	36.49	0.42	0.33	0.33	0.59	3.21
	ANH25AL		32.75	49.44	0.56	0.57	0.57	0.8	
	ANH30A	M8×25	38.74	52.19	0.66	0.53	0.53	1.09	4.47
	ANH30AL		47.27	69.16	0.88	0.92	0.92	1.44	
	ANH35A	M8×25	49.52	69.16	1.16	0.81	0.81	1.56	6.3
	ANH35AL		60.21	91.63	1.54	1.4	1.4	2.06	
	ANH45A	M12×35	77.57	102.71	1.98	1.55	1.55	2.79	10.41
	ANH45AL		94.54	136.46	2.63	2.68	2.68	3.69	

www.vipdo.cn 400-098-1117 工厂自动化零件一站式采购平台

AA 滚珠型直线导轨 ◀ ANH-A/ANH-AL

代码	滑块型号	导轨形式	尺寸	滑块类型	预压	精度	代码	滑块型号	导轨长度 L:mm	精度
LAA11 LAA12	ANH15A	ANH系列	15 20 25 30 35 45	A: 法兰型; AL: 法兰加长型;	Z0: 轻预压 ZA: 中预压 ZB: 重预压	C: 普通级 H: 高级 P: 精密级	LAA11 LAA12	ANH15A	1~4000	C: 普通级 H: 高级 P: 精密级
	ANH20A							ANH20A		
	ANH20AL							ANH20AL		
	ANH25A							ANH25A		
	ANH25AL							ANH25AL		
	ANH30A							ANH30A		
	ANH30AL							ANH30AL		
	ANH35A							ANH35A		
	ANH35AL							ANH35AL		
	ANH45A							ANH45A		
	ANH45AL							ANH45AL		

直
线
导
轨
20

·ANH端距参数

H	24 28 30	36 40	42 45	48 55	60 70	F(安装孔数)	E
L	100~139	/	/	/	/	2	$E=[L-(F-1)*P]/2$ P: 螺钉孔间距 E: 螺钉中心孔至端面距离
	140~199	160~199	200~263	200~255	255~336	3	
	200~259	200~261	264~343	256~335	337~441	4	
	260~319	262~321	344~423	336~415	442~546	5	
	320~379	322~381	424~503	416~495	547~651	6	
	380~439	382~441	504~583	496~575	652~756	7	
	440~499	442~501	584~663	576~655	757~861	8	
	500~559	502~561	664~743	656~735	862~966	9	
	560~619	562~621	744~823	736~815	967~1071	10	
	620~679	622~681	824~903	816~895	1072~1176	11	
	680~739	682~741	904~983	896~975	1177~1281	12	
	740~799	742~801	984~1063	976~1055	1282~1386	13	
	800~859	802~861	1064~1143	1056~1135	1387~1491	14	
	860~919	862~921	1144~1223	1136~1215	1492~1596	15	
	920~979	922~981	1224~1303	1216~1295	1597~1701	16	
	980~1039	982~1041	1304~1383	1296~1375	1702~1806	17	
	1040~1099	1042~1101	1384~1463	1376~1455	1807~1911	18	
	1100~1159	1102~1161	1464~1543	1456~1535	1912~2016	19	
	1160~1219	1162~1221	1544~1623	1536~1615	2017~2121	20	
	1220~1279	1222~1281	1624~1703	1616~1695	2122~2226	21	
	1280~1339	1282~1341	1704~1783	1696~1775	2227~2331	22	
	1340~1399	1342~1401	1784~1863	1776~1855	2332~2436	23	
	1400~1459	1402~1461	1864~1943	1856~1935	2437~2541	24	
	1460~1519	1462~1521	1944~1960	1936~2015	2542~2646	25	
	1520~1579	1522~1581	/	2016~2095	2647~2751	26	
	1580~1639	1582~1641	/	2096~2175	2752~2856	27	
	1640~1699	1642~1701	/	2176~2255	2857~2961	28	
	1700~1759	1702~1761	/	2256~2335	2962~3066	29	
	1760~1819	1762~1821	/	2336~2415	3067~3171	30	
	1820~1879	1822~1881	/	2416~2496	3172~3276	31	
	1880~1939	1882~1941	/	2496~2575	3277~3381	32	
	1940~1960	1942~1960	/	2576~2655	3382~3486	33	
P	60		80		105	/	



请按图示订货

■ LAA11-ANH15A-L200-Z0-C

代码	滑块型号	长度L	预压	精度
LAA11	ANH15A	200	Z0: 轻预压	C



交期Delivery

3天

发货

○本产品发货时间不含周日



www.vipdo.cn

400-098-1117

工厂自动化零件一站式采购平台

汇集国内外知名品牌, 让采购更便捷, 让设计更高效!