


线性导向轴 ◀ 一端外螺纹型·标准型/精密型/同径型




代码			D 公差	材质	硬度	表面处理
标准型	精密型	同径型				
EGBM52	EGBM72	EGBN52	g6	GB:GCr15 JIS:相当于SUJ2	高频淬火 含有 有效硬化层 淬火 硬度 淬火硬度: HRC54~60	镀硬铬, 镀层硬度HV850~, 镀层厚度3~5μm
EGBM57	EGBM77	EGBN57		GB:9Cr18Mo JIS:相当于SUS440C		

标准型
EGBM52
EGBM57

精密型
EGBM72
EGBM77

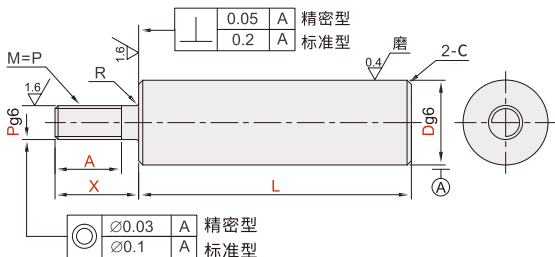

同径型
EGBN52
EGBN57

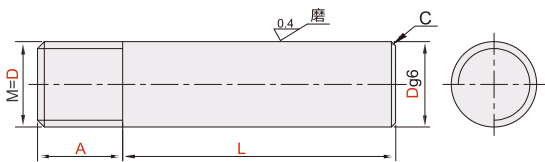

型号			(最小单位1)			P 选择	C
代码	Dg6		L	X	A		
标准型 EGBM52 EGBM57	4		20~300	X=2~P×5	根据使用 要求指定	3	0.2
	5	-0.004	20~400			3 4	
	6	-0.012	20~600			3 4 5 6	
	8	-0.005	20~800			4 5 6 8	0.5
	10	-0.014				5 6 8 10	
	12					5 6 8 10 12	
	13	-0.006	20~1000			5 6 8 10 12	
	15	-0.017				5 6 8 10 12	
	16					5 6 8 10 12	
	18					6 8 10 12 16	
	20		20~1200			8 10 12 16	1
	25	-0.007				8 10 12 16 20 24	
	30	-0.020				8 10 12 16 20 24	
	35	-0.009				10 12 16 20 24 30	
	40	-0.025	20~1500			12 16 20 24 30	
	50					16 20 24 30	
精密型 EGBM72 EGBM77	5	-0.004	20~300	X=2~P×5	根据使用 要求指定	3	0.2
	6	-0.012	20~300			3 4	
	8	-0.005	20~300			3 4 5 6	
	10	-0.014	20~350			4 5 6 8	0.5
	12					5 6 8 10	
	13	-0.006				5 6 8 10	
	15	-0.017				5 6 8 10 12	
	16					5 6 8 10 12	
	18					5 6 8 10 12 16	
	20		25~450			6 8 10 12 16	1
	25	-0.007				8 10 12 16 20	
	30	-0.020				8 10 12 16 20 24	

型号		最小单位1		M	C
代码	Dg6	L	A		
同径型 EGBN52 EGBN57	4	20~300	4~25	4	0.2
	5	20~400	4~30	5	
	6	20~600	5~35	6	
	8	20~800	7~45	8	0.5
	10		8~55	10	
	12		9~65	12	
	16	20~1000	10~85	16	
	20		13~105	20	
	30	20~1500	18~155	30	1



请按图示订货

■ EGBN52-D4-L200-A20

型号		L	A
代码	Dg6		
EGBN52	4 -0.004 -0.012	20~300	4~25



交期Delivery

4 天

发货

○本产品发货时间不含周日