


线性导向轴 ◀ 直杆型·标准型



代码	类型	D 公差	材质	硬度	表面处理
EGBE52	标准型	g6	GB:GCr15 JIS:相当于SUJ2	高频淬火 含有效硬化层 淬火硬度	镀硬铬, 镀层硬度HV850~, 镀层厚度3~5μm
EGBE57			GB:9Cr18Mo JIS:相当于SUS440C		镀硬铬, 镀层硬度HV850~, 镀层厚度3~5μm
EGBE62			GB:45 JIS:S45C	淬火硬度: HRC54~60	镀硬铬, 镀层硬度HV850~, 镀层厚度3~5μm

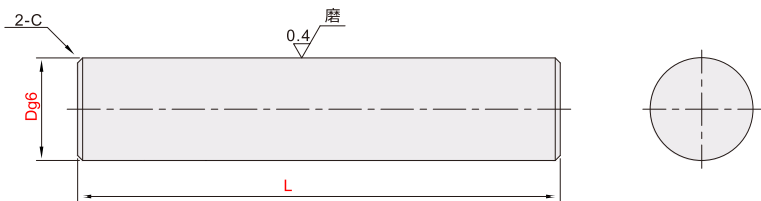

导向轴

01

型号			L(最小单位1)	C
代码	Dg6			
EGBE52 EGBE57 EGBE62	4	-0.004 -0.012	8~400	0.2
	5		8~400	
	6		15~600	
	8	-0.005 -0.014	15~800	0.5
	10		15~800	
	12	-0.006 -0.017	15~1000	
	13		20~1000	
	15		20~1000	
	16		25~1200	
	18		25~1200	
	20		25~1200	
	25	-0.007 -0.020	30~1200	1
	30		30~1500	
	35	-0.009 -0.025	30~1500	
	40		40~1500	
	50		60~1500	



请按图示订货

■ EGBE52-D4-L200

型号		L(最小单位1)	C
代码	Dg6		
EGBE52	4 -0.004 -0.012	8~400	0.2



交期Delivery

4天

发货

○本产品发货时间不含周日



www.vipdo.cn



400-098-1117

工厂自动化零件一站式采购平台

汇集国内外知名品牌, 让采购更便捷, 让设计更高效!