


线性导向轴 ◀ 两端内螺纹型



代码	类型	D 公差	材质	硬度	表面处理
EGBC52	标准型	g6	GB:GCr15 JIS:相当于SUJ2	高频淬火 含有效硬化层 淬火硬度 HRC54~60	镀硬铬, 镀层硬度HV850~, 镀层厚度3~5μm
EGBC57			GB:9Cr18Mo JIS:相当于SUS440C		
EGBC62			GB:45 JIS:相当于S45C		
EGBC72	精密型		GB:GCr15 JIS:相当于SUJ2		
EGBC77			GB:9Cr18 JIS:相当于SUS440C		

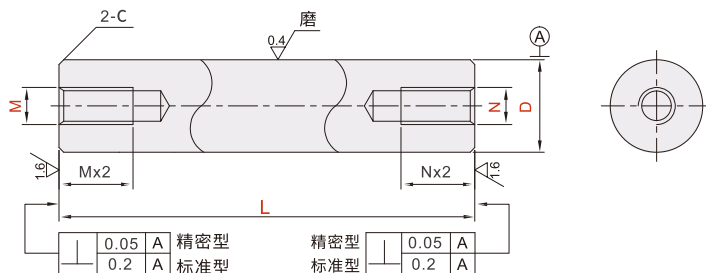

型号		L(最小单位1)		M·N(粗牙螺纹)		C
代码	Dg6					
标准型 EGBC52 EGBC57 EGBC62	4	-0.004	15~300	2		0.2
	5	-0.012	15~400	2.6 3		
	6		15~600	3		
	8	-0.005	15~800	3 4 5		0.5
	10	-0.014		3 4 5 6		
	12		15~1000	4 5 6 8		
	13			4 5 6 8		
	15	-0.006	20~1000	4 5 6 8 10		
	16	-0.017	20~1200	4 5 6 8 10		
	18			4 5 6 8 10 12		1
	20		25~1200	4 5 6 8 10 12		
	25	-0.007		4 5 6 8 10 12 16		
	30	-0.020		4 5 6 8 10 12 16 20		
	35	-0.009		4 5 6 8 10 12 16 20 24		
	40	-0.025	30~1500	4 5 6 8 10 12 16 20 24 30		
	50			4 5 6 8 10 12 16 20 24 30		

型号		L(最小单位1)		M·N(粗牙螺纹)		C
代码	Dg6					
精密型 EGBC72 EGBC77	4	-0.004	20~200	2		0.2
	5	-0.012		2.6 3		
	6		20~300	3		
	8	-0.005		3 4 5		
	10	-0.014		3 4 5 6		
	12		20~350	4 5 6 8		
	13			4 5 6 8		
	15	-0.006		4 5 6 8 10		
	16	-0.017		4 5 6 8 10		
	18			4 5 6 8 10 12		
	20	-0.007	25~450	4 5 6 8 10 12		
	25	-0.020		4 5 6 8 10 12 16		
	30			4 5 6 8 10 12 16 20		



请按图示订货

EGBC72-D5-L100-M3-N3

型号		L(最小单位1)		M·N(粗牙螺纹)
代码	Dg6			
EGBC72	4	-0.004	20~200	2
	5	-0.012		3



交期Delivery

4天

发货

○本产品发货时间不含周日



www.vipdo.cn



400-098-1117

工厂自动化零件一站式采购平台

汇集国内外知名品牌, 让采购更便捷, 让设计更高效!