


L形导向轴支座 ◀ 分离型



分离型		材质		表面处理	附件
H选择型	H指定型	国标	相当		
ZFG01	ZFG11	45	S45C	发黑	2个内六角圆柱头螺钉
ZFG02	ZFG12			无电解镀锌	
ZFG06	ZFG16	0Cr18Ni9	SUS304	/	2个内六角圆柱头螺钉 (不锈钢)
ZFG08	ZFG18	LD31	A6063	本色阳极氧化	
ZFG09	ZFG19			黑色阳极氧化	2个内六角圆柱头螺钉

■如对防锈有要求, 请优先选用不锈钢材质、铝合金材质或喷细砂无电解镀锌产品。

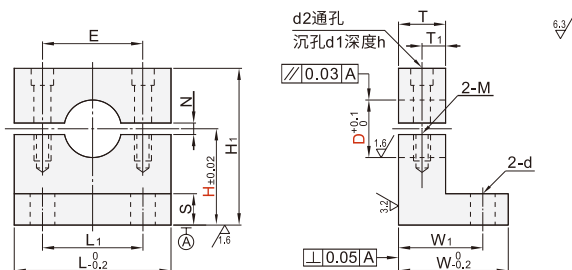

型号	H		指定型	L	H ₁	T	T ₁	S	W	W ₁	L ₁	d	E	M	d ₂	d ₁	h	N	
代码	D _{h7}	选择型	最小单位0.1																
H 选择型	3	10 15 20	10.0~20.0	22	H+6	8	4	3.8	15.8	12	13	3.5	13	M3深6	3.5	6.5	3.5	1.2~1.8	
	4	10 15 20			H+7														
	ZFG01	5	15 20 25	15.0~25.0	30	H+10	10	5	5.8	19.8	15	20	4.5	20	M4深8	4.5	8	4.5	1.2~2.3
	ZFG02	6	15 20 25																
ZFG06	8	15 20 25 30 40	20.0~40.0	38	H+12	16	8	7.8	31.8	24	36	6.6	36	M6深12	6.6	11	6.5		
ZFG08	10	20 25 30 40																	
ZFG09	12	20 25 30 40	20.0~50.0	50	H+17	20	10	9.8	39.8	30	48	9	48	M8深16	9	14	9	1.2~3.5	
H 指定型	13	20 25 30 40																	76
	ZFG11	16	20 25 30 40 50	20.0~50.0	100	25	12.5	14.8	49.8	38	76	14	20	13					
ZFG12	20	25 30 40 50 60	25.0~60.0	70	H+20	20	10	9.8	39.8	30	48	9	48	M8深16	9	14	9		
ZFG16	25	30 40 50 60	30.0~60.0															50	25
ZFG18	30	30 40 50 60	30.0~60.0	70	H+30	20	10	9.8	39.8	30	48	9	48	M8深16	9	14	9		
ZFG19	35	40 50 60	40.0~60.0															70	20
	40	40 50 60 80	40.0~80.0	76	H+40	25	12.5	14.8	49.8	38	76	14	76	M12深25	14	20	13		
	50	50 60 80	50.0~80.0	100	H+40	25	12.5	14.8	49.8	38	76	14	76	M12深25	14	20	13		



请按图示订货

■ ZFG01-D10-H25

型号		H
代码	D _{h7}	选择型
ZFG01	10	25



交期Delivery

6天

发货

○本产品发货时间不含周日



www.vipdo.cn



400-098-1117

工厂自动化零件一站式采购平台