

无弹簧定位珠 ◀ 内六角螺栓型/紧定螺钉型



■内六角螺栓型

代码	类型	主体			球头	
		材质	硬度	表面处理	材质	硬度
YZL61	内六角螺栓型	SCM435	35-45HRC	发黑	SUJ2	53-60HRC
YZL62		SUS304	/	/	SUS440C	55HRC-


■紧定螺钉型

代码	类型	主体			球头	
		材质	硬度	表面处理	材质	硬度
YZL71	紧定螺钉型	SCM435	35-45HRC	发黑	SUJ2	53-60HRC
YZL72		SUS304	/	/	SUS440C	55HRC-


垫圈
吊钩
吊钩

30

内六角螺栓型
YZL61/62

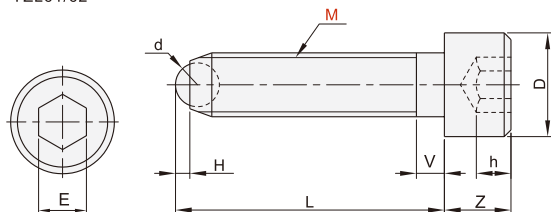

紧定螺钉型
YZL71/72

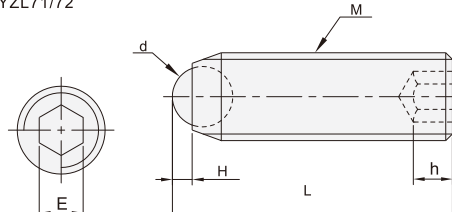

■内六角螺栓型

型号		公称尺寸	L	V	D	Z	E	h	d	H	耐负载 (kN)
代码	M										
YZL61 YZL62	4	10	10.5	2.1	7	4	3	2	2.5	0.8	1.3
		12	12.5								
		16	16.5								
		20	20.5								
		25	25.5								
	5	12	12.6	2.4	8.5	5	4	2.5	3	1	1.4
		16	16.6								
		20	20.6								
		25	25.6								
		30	30.6								
	6	16	16.8	3	10	6	5	3	4	1.3	3.3
		20	20.8								
		25	25.8								
		30	30.8								
		40	40.8								
	8	20	21.2	3.5	13	8	6	4	5.5	1.8	3.9
		30	31.2								
		35	36.2								
		40	41.2								
		50	51.2								
	10	25	26.7	4.5	16	10	8	5	7	2.3	3.4
		30	31.7								
		40	41.7								
		50	51.7								
		60	61.7								
	12	30	32	5	18	12	10	6	8.5	2.8	4.8
		50	52								
		80	82								

■紧定螺钉型

型号	L	d	E	h	H	耐负载 (kN)
YZL71 YZL72	3 5.2 10.2	1.5	1.5	1.2	0.5	0.5
	4 6.5 10.5 16.5	2.5	2	2	0.8	1.3
	5 8.6 12.6 20.6	3	2.5	2	1	1.4
	6 10.8 16.8 20.8 25.8	4	3	3.5	1.3	3.3
	8 *11.2 13.2 21.2 26.2 31.2	5.6	4	5(2.5)	1.8	3.4
	10 *13.7 17.7 21.7 26.7 36.7	7.1	5	6(3.5)	2.3	3.9
	12 *18 22 32 42	8.7	6	8(3)	2.8	4.8

注: L尺寸带 * 符号的, h值为 () 内的尺寸。



请按图示订货

■YZL61-M4-12

型号	代码	M	公称尺寸
YZL61	4		12

■YZL71-M4-L10.5

型号	代码	M	L
YZL71	4		10.5



交期Delivery

3天

发货

○本产品发货时间不含周日

P1088