



氮气弹簧 ◀ 头部安装限定型/反作用力选择型



代码	类型	材质			表面处理		使用温度
		气缸	活塞杆	衬套	气缸	活塞杆	
AGTV	头部安装限定型	STKM11A	S20C	聚缩醛树脂	烤漆	镀铬	-20℃ ~60℃

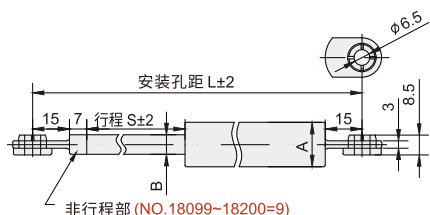

NO. 15049~18200

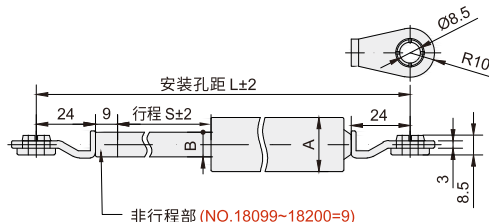

NO. 22250~22360

型号		反作用力	最大长度 Lmax	最小长度 Lmin	行程	氮气反作用力 (20℃)					A	B	H	适用安装 支架	重量 (g)								
						最大长度-10mm行程时		最大长度-(S)mm行程时															
代码	规格					Fa		Fb															
						N	kgf	N	kgf	(s)													
AGTV	15049	030	181	132	49	30	3	40	4.1	39	15	7	110	ADJ52-6A ADJ52-6B ADJ52-6C ADJ52-6D	83								
	15049	055				55	6	71	7.2														
	15049	070				70	7.1	89	9														
	15049	085				85	9	109	11.1														
	15049	150				150	15	191	19.5														
	15069	050	221	152	69	50	5	67	6.8	59			18		8	130	96						
	15069	080				80	8	107	10.9														
	15069	100				100	10.2	132	13.4														
	15069	120				120	12	158	16.1														
	15089	070				70	7	94	9.6														
	15089	085	261	172	89	85	8.7	115	11.7	79						160		221	150	109			
	15089	100				100	10	135	13.8														
	15089	050				150	15	202	20.6														
	15089	200				200	20	268	27.3														
	15099	075				75	8	101	10.3														
	15099	120	281	182	99	120	12	162	16.5	89									18		8	160	116
	15099	200				200	20	270	27.6														
	18099	300				300	30.5	392	39.9														
	18099	400				400	40.7	522	53.2														
	18120	100				100	10	123	13														
	18120	200	365	245	120	200	20	245	25	110	246	301		221								183	
	18120	300				300	31	367	37														
	18120	400				400	41	489	50														
	18150	100				100	10	126	12.9														
	18150	150				150	15	188	19.2														
	18150	200	420	270	150	200	20	251	25.6	140			246	301	246		205						
	18150	250				250	26	313	31.9														
	18200	100				100	10	127	13														
	18200	150				150	15	190	19.4														
	18200	200				200	20	253	25.8														
	18200	300	525	325	200	300	31	379	38.7	190					246	301		301		248			
	22250	100				100	10	129	13.2														
	22250	150				150	15.2	193	19.6														
	22250	200				200	20	257	26.2														
	22250	300				300	31	384	39.2														
	22250	400	635	385	250	400	41	511	52.1	240								246	301		352		409
	22270	345				345	35	528	53.9														
	22270	500				500	51	763	77.9														
	22270	700				700	71	1065	108.7														
	22290	745				745	76	1160	118.4														
	22290	845	700	410	290	845	86	1314	134.1	280	377	407									377	556	
	22300	200				200	20	257	26.2														
	22300	250				250	26	321	32.8														
	22300	300				300	31	385	39.3														
	22360	215				215	22	284	29														
	22360	345	833	473	360	345	35	456	46.5	350			440	523			440				523		



请按图示订货

■ AGTV-15049-055

型号		
代码	规格	反作用力
AGTV	15049	30
	15049	55



交期Delivery

3天

发货

○本产品发货时间不含周日