

# 调整螺栓 ◀ 内六角孔型/滚花旋钮型



## ■标准型/滚花型

| 代码    |       |       | 材质     | 表面处理  |
|-------|-------|-------|--------|-------|
| 标准型   | 滚花型   |       |        |       |
| 粗牙螺纹  | 粗牙螺纹  | 细牙螺纹  | S45C   | 发黑    |
| YAZ01 | YAZ11 | YAZ21 |        | 无电解镀镍 |
| YAZ02 | YAZ12 | YAZ22 |        | /     |
| YAZ03 | YAZ13 | /     | SUS304 | /     |


■注意：E和E1之间方向有可能不一样

## ■滚花旋钮型

| 代码    | 类型    | 材质     | 表面处理  |
|-------|-------|--------|-------|
| YAZ31 | 滚花旋钮型 | S45C   | 发黑    |
| YAZ32 |       |        | 无电解镀镍 |
| YAZ33 |       | SUS304 | /     |


### 标准型

YAZ01/02/03

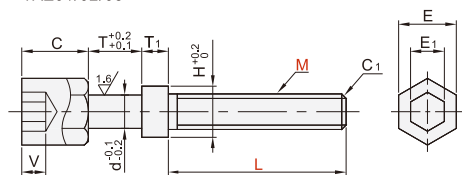


### 滚花型

YAZ11/12/13/21/22

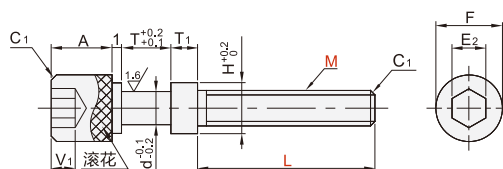

### 滚花旋钮型

YAZ31 YAZ32 YAZ33

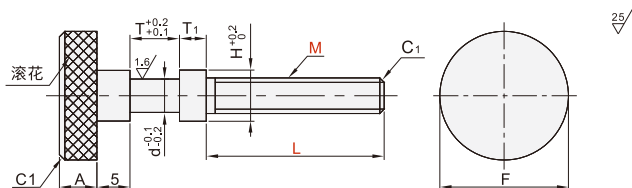

## ■标准型/滚花型

| 型号          |    | L最小单位5 |        | d    | T  | M×螺距    |        | T1  | H    | C  | A  | E  | E1  | E2 | V   | V1 | P  |
|-------------|----|--------|--------|------|----|---------|--------|-----|------|----|----|----|-----|----|-----|----|----|
| 代码          | M  | 标准型    | 滚花型    |      |    | 粗牙螺纹    | 细牙螺纹   |     |      |    |    |    |     |    |     |    |    |
| 滚花型 标准型     | 3  | 10-55  | 10-45  | 2.5  | 7  | 3×0.5   | /      | 3   | 4.5  | 5  | 7  | 6  | /   |    | /   | 4  | 10 |
|             | 4  |        | 10-60  | 3.5  |    | 4×0.7   | 4×0.5  |     | 5.5  |    |    | 7  | 2.5 | 5  | 2.5 |    |    |
|             | 5  |        | 10-70  | 4.5  |    | 5×0.8   | 5×0.5  | 4.6 | 7.5  | 10 | 15 | 8  | 3   |    | 3   |    |    |
|             | 6  |        | 15-80  | 5.5  | 9  | 6×1.0   | 6×0.75 |     | 8.5  |    |    | 10 | 4   | 8  | 4   | 7  | 15 |
| YAZ11 YAZ01 | 5  | 15-55  | 10-70  | 4.5  |    | 5×0.8   | 5×0.5  | 4.6 | 7.5  | 10 | 15 | 8  | 3   |    | 3   |    |    |
| YAZ12 YAZ02 | 6  |        | 15-80  | 5.5  | 9  | 6×1.0   | 6×0.75 |     | 8.5  |    |    | 10 | 4   | 8  | 4   | 7  | 15 |
| YAZ13 YAZ03 | 8  |        | 20-110 | 7.5  | 12 | 8×1.25  | 8×0.75 | 6   | 11.5 | 15 | 25 | 13 | 5   |    | 5   |    |    |
| YAZ21       | 10 |        | 25-110 | 9.5  | 16 | 10×1.5  | 10×1.0 | 7   | 15.5 |    |    | 17 |     |    |     |    | 20 |
| YAZ22       | 12 | /      | 25-160 | 11.5 | 19 | 12×1.75 | 12×1.0 |     | 17.5 |    |    | 19 |     | 10 | /   | 9  |    |
|             | 16 |        |        | 15.5 |    | 16×2.0  | /      | 8   | 21.5 | 20 |    | 24 |     |    |     |    | 24 |

## ■滚花旋钮型

| 型号    |   | L最小单位5 |  | d   | T  | H    | T1  | A | F  |
|-------|---|--------|--|-----|----|------|-----|---|----|
| 代码    | M |        |  |     |    |      |     |   |    |
| YAZ31 | 3 | 10-25  |  | 2.5 | 7  | 4.5  | 3   | 4 | 16 |
|       | 4 |        |  | 3.5 |    | 5.5  |     |   |    |
|       | 5 |        |  | 4.5 |    | 7.5  | 4.6 | 6 | 20 |
|       | 6 |        |  | 5.5 |    | 8.5  |     |   |    |
| YAZ32 | 5 | 10-45  |  | 4.5 |    | 7.5  |     |   |    |
| YAZ33 | 6 | 15-55  |  | 5.5 |    | 8.5  |     |   |    |
|       | 8 | 20-65  |  | 7.5 | 12 | 11.5 | 6   |   |    |



请按图示订货

## ■YAZ01-M4-L10

| 型号    |   |       |
|-------|---|-------|
| 代码    | M | L     |
| YAZ01 | 4 | 10-55 |



交期Delivery

3天

发货

○本产品发货时间不含周日