


轴用/孔用挡圈 ◀ C型 弹簧钢/不锈钢 日标




代码	类型	材质	硬度	表面处理	适用标准
YCS01	C型轴用挡圈	弹簧钢	44~53HRC	规格<8:发黑;规格≥8:磷化黑	JIS B 2804-2001
YCS02		SUS420J2	34~42HRC	/	
YDS01	C型孔用挡圈	弹簧钢	44~51HRC	规格<9:发黑;规格≥9:磷化黑	
YDS02		SUS420J2	34~42HRC	/	

YCS01
YCS02

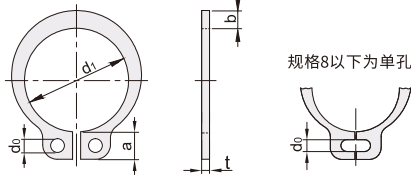

YDS01
YDS02



型号		挡圈						
代码	公称规格	d1	t	b(约)	a(约)	d0 (min)		
轴用挡圈 YCS01 YCS02	3*	2.7	0.25	±0.025	0.5	1.7	0.7	
	4*	3.7	0.4	±0.03	0.9	2.2	0.8	
	5	4.7	0.6		1.1	2.4		
	6	5.6	0.7	±0.04	1.3	2.8		
	7	6.5	0.8		1.4	3	1	
	8	7.4			1.6	3		
	9	8.4	1	±0.05	1.8	3.2		
	10	9.3			1.8	3	1.2	
	11	10.2			2	3.1		
	12	11.1			2.1	3.2	1.5	
	13	12	1	±0.05	2.1	3.3		
	14	12.9			3.4			
	15	13.8			3.5		1.7	
	16	14.7			3.6			
	17	15.7	1.2	±0.06	3.7			
	18	16.5			2.6	3.8		
	19	17.5			3.8			
	20	18.5			2.7	3.9		
	21	19.5	1.2	±0.06	4			
	22	20.5			4.1			
	24	22.2			2.9	4.2	2	
	25	23.2	1.5	±0.07	4.3			
	26	24.2			3.1	4.4		
	28	25.9			4.6			
	29	26.9	1.8	±0.07	4.7			
	30	27.9			3.5	4.8		
	32	29.6			5			
	34	31.5	1.8	±0.07	5.3		2.5	
	35	32.2			4	5.4		
	36	33.2			5.4			
	38	35.2			5.6			
	40	37	2	±0.07	4.5	5.8		
	42	38.5			6.2			
	45	41.5			6.3			
	47	43.4			4.8	6.6		
	48	44.5	2.5	±0.08	6.5			
	50	45.8			6.7			
	52	47.8			6.8			
	55	50.8	2	±0.07	7			
	56	51.8			7			
	58	53.8			5.5	7.1	2.5	
	60	55.8			7.2			
	65	60.8	2.5	±0.08	7.4			
	68	63.5			6.4	7.8		
	70	65.5			7.8			
	80	74.5			7.4	8.2		
	105	98	4	±0.09	9.5	9.8	4	

带*规格不适用于YCS02

型号		挡圈						
代码	公称规格	d1	t	b(约)	a(约)	d0(min)		
孔用挡圈 YDS01 YDS02	6	6.7	0.4	±0.03	0.7	1.6		
	7	7.7			0.8	1.7	0.8	
	8	8.8			0.9	1.7		
	9	9.8			1.1	2.2		
	10	10.7	0.6	±0.04	1.5	2.8		
	11	11.8			1.5	3	1.2	
	12	13			1.7	3.1		
	13	14.1			1.9	3.6	1.5	
	14	15.1	1	±0.05	1.9	3.6		
	15	16.2			1.9	3.7		
	16	17.3			1.9	3.8	1.7	
	17	18.3			2.4	4		
	18	19.5	±0.2	±0.06	2.5	4		
	19	20.5			2.5	4.1		
	20	21.5			2.5	4.3		
	22	23.5			3	4.4	2	
	24	25.9	1.2	±0.06	3	4.6		
	25	26.9			3	4.7		
	26	27.9			3.5	5.2		
	28	30.1	±0.25	±0.06	3.5	5.2		
	30	32.1			3.5	5.2		
	32	34.4			4	5.3		
	34	36.6			4	5.4		
	35	37.8	1.5	±0.07	4	5.7		
	36	38.8			4.5	5.7		
	37	39.8			4.5	5.7		
	38	40.8			4.5	6.1		
	39	42.5	±0.4	1.75	4.5	6.1		
	40	43.5			4.5	6.5	2.5	
	42	45.5			5.1	6.5		
	45	48.5			5.1	6.5		
	46	49.5	2	±0.08	5.1	6.6		
	47	50.5			5.5	6.8		
	48	51.5			5.5	6.9		
	50	54.2			6	7.4		
	52	56.2	±0.45	2.5	6	7.4		
	55	59.2			6.6	7.4		
	56	60.2			6.6	7.8		
	58	62.2			7	8		
	60	64.2	±0.55	3	7.6	8.3	3	
	62	66.2			8	8.5		
	63	67.2						
	65	69.2						
	68	72.5	±0.55	3				
	70	74.5						
	72	76.5						
	75	79.5						
	80	85.5	±0.55	3				
	85	90.5						
	90	95.5						
	95	100.5						

垫圈
吊环
螺母
34



请按图示订货

■YCS01-3

型号

代码

公称规格

YCS01

3*



交期Delivery

3天

发货

○本产品发货时间不含周日