



# 链轮/链条 ◀ 80B系列 (16A)

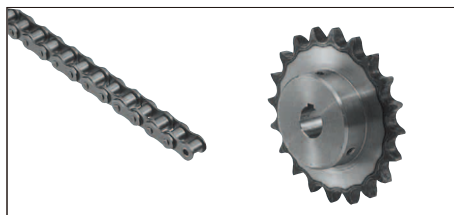

| 链条 | 代码     | 类型   | 节距   | 材质     |
|----|--------|------|------|--------|
|    | KHT80  | 80系列 | 25.4 | 钢      |
|    | KHTQ80 |      |      | 钢(高强度) |

| 链轮 | 代码      | 类型   | 材质     | 热处理  | 表面处理 | 附件   |
|----|---------|------|--------|------|------|------|
|    | KQV80B  | 80系列 | S45C   | 齿顶高频 | 发黑   | 固定螺丝 |
|    | KQVS80B |      | SUS304 | \    | \    |      |

链轮

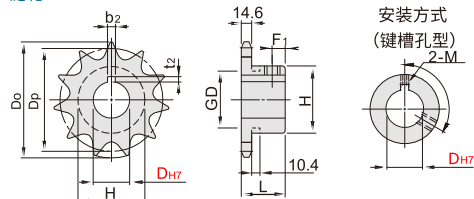


- 工艺问题, 无法保证多个产品齿顶一致重合;
- 齿顶和键槽的偏置为 $\pm 0.5\text{mm}$ 。

■ 轴孔加工尺寸表

| 轴孔直径 D | 键槽 $b_2 \times t_2$ | 固定螺丝 M |
|--------|---------------------|--------|
| 24~30  | 8 $\times$ 3.3      | 8      |
| 32~38  | 10 $\times$ 3.3     | 8      |
| 40~42  | 12 $\times$ 3.3     | 8      |
| 45~50  | 14 $\times$ 3.8     | 10     |
| 55     | 16 $\times$ 4.3     | 12     |
| 60     | 18 $\times$ 4.4     | 12     |

链条

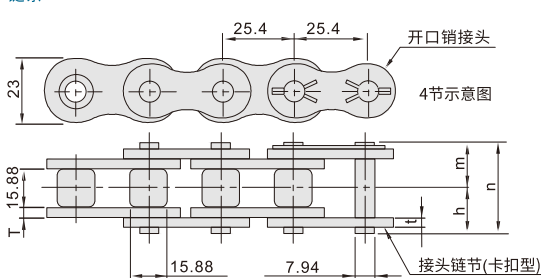

- 附带接头链节, 需自行安装。

| 型号            |    | 轴孔直径D <sub>H7</sub> |    |    |    |    |    |    |    |    |    |    |       | D <sub>p</sub> | D <sub>o</sub> | 盖壳   |    |    | F <sub>1</sub> | 重量(g) |      |
|---------------|----|---------------------|----|----|----|----|----|----|----|----|----|----|-------|----------------|----------------|------|----|----|----------------|-------|------|
| 代码            | 齿数 |                     |    |    |    |    |    |    |    |    |    |    |       |                |                | H    | GD | L  |                |       |      |
| 链轮<br>KQV80B  | 9  | 25                  | 28 | 30 | 32 | 35 |    |    |    |    |    |    | 74.27 | 85             | 58             | 44   | \  | 40 | 12             | 7     | 870  |
|               | 10 | 25                  | 28 | 30 | 32 | 35 |    |    |    |    |    |    | 82.19 | 93             | 52             | 1020 |    |    |                |       |      |
|               | 11 | 25                  | 28 | 30 | 32 | 35 | 38 |    |    |    |    |    | 90.16 | 102            | 60             | 1250 |    |    |                |       |      |
|               | 12 | 25                  | 28 | 30 | 32 | 35 | 38 | 40 | 42 | 45 |    |    |       | 98.14          | 110            | 67   |    |    |                | 1600  |      |
|               | 13 | 25                  | 28 | 30 | 32 | 35 | 38 | 40 | 42 | 45 | 48 | 50 |       |                | 106.14         | 118  |    |    |                | 77    | 1900 |
|               | 14 | 25                  | 28 | 30 | 32 | 35 | 38 | 40 | 42 | 45 | 48 | 50 |       |                | 114.15         | 127  |    |    |                | 2150  |      |
|               | 15 | 25                  | 28 | 30 | 32 | 35 | 38 | 40 | 42 | 45 | 48 | 50 | 55    | 60             | 122.17         | 135  |    |    |                | 93    | 2300 |
|               | 16 | 25                  | 28 | 30 | 32 | 35 | 38 | 40 | 42 | 45 | 48 | 50 | 55    | 60             | 130.2          | 143  |    |    |                |       | 2500 |
|               | 17 | 25                  | 28 | 30 | 32 | 35 | 38 | 40 | 42 | 45 | 48 | 50 | 55    | 60             | 138.23         | 151  |    |    |                |       | 2950 |
|               | 18 | 25                  | 28 | 30 | 32 | 35 | 38 | 40 | 42 | 45 | 48 | 50 | 55    | 60             | 146.27         | 159  |    |    |                |       | 3150 |
|               | 19 | 25                  | 28 | 30 | 32 | 35 | 38 | 40 | 42 | 45 | 48 | 50 | 55    | 60             | 154.32         | 167  |    |    |                |       | 3400 |
|               | 20 | 25                  | 28 | 30 | 32 | 35 | 38 | 40 | 42 | 45 | 48 | 50 | 55    | 60             | 162.37         | 176  |    |    |                |       | 3600 |
| 21            | 25 | 28                  | 30 | 32 | 35 | 38 | 40 | 42 | 45 | 48 | 50 | 55 | 60    | 170.42         | 184            | 3850 |    |    |                |       |      |
| 链轮<br>KQVS80B | 10 | 25                  | 30 |    |    |    |    |    |    |    |    |    |       | 82.19          | 93             | 52   | \  | \  | 12             |       | 1020 |
|               | 12 | 25                  | 30 |    |    |    |    |    |    |    |    |    |       | 98.14          | 110            | 67   |    |    |                | 1600  |      |
|               | 13 | 25                  | 30 |    |    |    |    |    |    |    |    |    |       | 106.14         | 118            | 77   |    |    |                | 1900  |      |
|               | 14 | 25                  | 30 |    |    |    |    |    |    |    |    |    |       | 114.15         | 127            |      |    |    |                | 2150  |      |
|               | 15 | 25                  | 30 |    |    |    |    |    |    |    |    |    |       | 122.17         | 135            |      |    |    |                | 2300  |      |
|               | 16 | 30                  | 35 |    |    |    |    |    |    |    |    |    |       | 130.2          | 143            | 93   |    |    |                | 2500  |      |
|               | 20 | 35                  | 40 |    |    |    |    |    |    |    |    |    |       | 162.37         | 176            |      |    |    |                | 3600  |      |

| 链条 | 型号     | 节数(偶数) | 接头形式   | h     | m     | n     | T/t |
|----|--------|--------|--------|-------|-------|-------|-----|
|    | KHT80  | 8~     | A (卡扣) | 16.07 | 19.18 | 35.25 | 3.2 |
|    | KHTQ80 |        |        | 17.7  | 20.8  | 38.5  | 4   |



请按图示订货

■ 链条KHTQ80-178

| 型号     | 节数(偶数) | 接头形式   |
|--------|--------|--------|
| KHTQ80 | 8~     | A (卡扣) |

■ 链轮KQV80B-10-D32

| 型式     | 齿数 | 轴孔直径 $D_{H7}$  |
|--------|----|----------------|
| KQV80B | 9  | 25 28 30 32 35 |
|        | 10 | 25 28 30 32 35 |



交期Delivery

3天

发货

○ 本产品发货时间不含周日