


膜片式联轴器 ◀ 螺钉夹紧型 单膜片/双膜片(铝合金) 经济型




代码	类型	材质		表面处理	附件
		主体	膜片	主体	
CDE01	螺钉夹紧型	铝合金	SUS301CSP	阳极氧化	内六角圆柱头螺钉
CDE21					

- ① 顺时针和逆时针回转特性一样;
② 补偿径向、角向、轴向偏差。

CDE01 单膜片

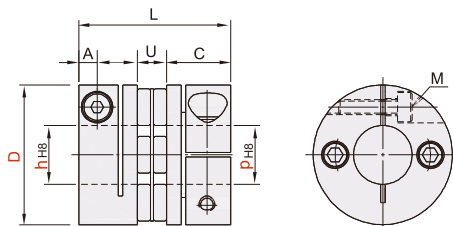

CDE21 双膜片

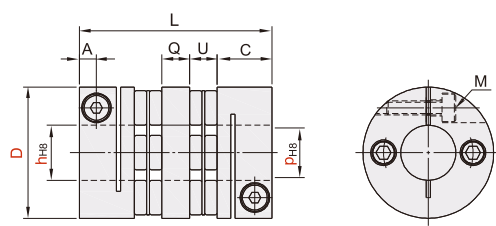

型号		h-p (h≤p)
代码	D	
CDE01	19	3 4 5 6 6.35 7 8
	26	4 5 6 6.35 7 8 9 9.525 10 11
	29	5 6 6.35 8 10 11 12 14
	34	5 6 6.35 7 8 9 9.525 10 11 12 12.7 13 14 15
	39	8 9 9.525 10 11 12 12.7 13 14 15 16
	44	8 9 9.525 10 11 12 12.7 13 14 15 16 17 18 19 20
	56	12 12.7 13 14 15 16 17 18 19 20 22 24 25
	68	14 15 16 17 18 19 20 22 24 25 28 30
	82	24 25 28 30 32 35

型号		h-p (h≤p)
代码	D	
CDE21	19	3 4 5 6 6.35 7 8
	26	4 5 6 6.35 7 8 9 9.525 10 11
	29	5 6 6.35 8 10 11 12 14
	34	5 6 6.35 7 8 9 9.525 10 11 12 12.7 13 14 15
	39	8 9 9.525 10 11 12 12.7 13 ·14 15 16
	44	8 9 9.525 10 11 12 12.7 13 ·14 15 16 17 18 19 20
	56	12 12.7 13 14 15 16 17 18 19 20 22 24 25
	68	14 15 16 17 18 19 20 22 24 25 28 30
	82	24 25 28 30 32 35

■ 尺寸性能表

代码	D	L	A	C	Q	U	M	锁紧扭矩 (N·m)	额定扭矩 (N·m)	最大扭矩 (N·m)	最高转速 (r/pm)	惯性力矩 (kg·m²)	静态扭转刚性 (N·m/rad)	径向偏差 (mm)	角向偏差 (°)	轴向偏差 (mm)	重量 (g)
CDE01	19	19.25	3.3	9	/	1.25	M2.5	1	0.8	1.6	10000	0.58×10^{-6}	580	0.02	1	±0.1	11
	26	23.5	3.3	10.5		2.5	M3	1	1.5	3		2.26×10^{-6}	950	0.02	1	±0.15	25
	29	25.7	3.5	11.9		1.9	M3	1	3	6		4.1×10^{-6}	1350	0.15	2	±0.3	43
	34	27.35	4	12		3.35	M4	1.5	4	8		8.02×10^{-6}	2000	0.02	1	±0.2	49
	39	34.35	5	15		4.35	M4	3.4	6	12		1.8×10^{-5}	4500			±0.25	82
	44	34.6	5	15		4.6	M4	3.4	10	20		2.85×10^{-5}	5200			±0.3	100
	56	45.25	6.6	20		5.25	M5	7	25	50		8.96×10^{-5}	11000			±0.4	222
	68	53.8	7.6	24		5.8	M6	14	60	120		2.59×10^{-4}	19000			±0.45	389
CDE21	82	68	9.3	30		8	M8	30	100	200		7.1×10^{-4}	22000			±0.55	727
	19	26.5	3.1	9	6	1.25	M2.5	1	0.8	1.6	10000	0.78×10^{-6}	430	0.11	1	±0.2	15
	26	33.5	3.3	10.5	7.5	2.5	M3	1	1.5	3		3.3×10^{-6}	700	0.15	1	±0.3	35
	29	34.3	3.5	11.9	6.7	1.9	M2.5	1	3	6		5.5×10^{-6}	1200	0.15	2	±0.3	43
	34	38.2	4	12	7.5	3.35	M4	1.5	4	8		1.05×10^{-5}	1700	0.18	1	±0.36	61
	39	47.7	5	15	9	4.35	M4	3.4	6	12		2.57×10^{-5}	2500	0.22		±0.5	115
	44	48.2	5	15	9	4.6	M4	3.4	10	20		4.25×10^{-5}	3000	0.24		±0.6	140
	56	62.5	6.6	20	12	5.25	M5	7	25	50		1.33×10^{-4}	8500	0.28		±0.8	307
	68	73.6	7.6	24	14	5.8	M6	14	60	120		3.67×10^{-4}	12000	0.32		±0.9	535
	82	98	9.3	30	22	8	M8	30	100	200		1.03×10^{-3}	15000	0.52		±1	981



请按图示订货

■ CDE21-D19-h6-p8

型号		h-p (h≤p)
代码	D	
CDE21	19	3 4 5 6 6.35 7 8
	26	4 5 6 6.35 7 8 9 9.525 10 11



交期Delivery

3天

发货

○本产品发货时间不含周日

联轴器

06