


减震型联轴器 ◀ 螺钉夹紧型/标准型/加长型/短型



代码	类型	标准型	材质		附件
			主体	间隔环	
CJZ11	螺钉夹紧型	标准型	铝合金	FKM	内六角圆柱头螺钉

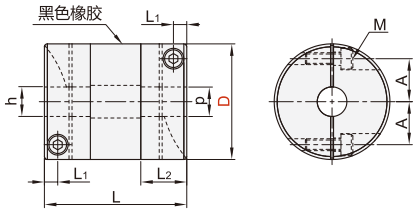

型号		h-p																
代码	D																	
标准型 CJZ11	15	h	3	4	4.5	5	6											
		p	5	6	4	5	6	5	6	6								
	19	h	4	5	6	6.35	8											
		p	5	8	5	6	7	8	6	6.35	7	8	8					
	25	h	5	6	6.35		8	10	12									
		p	6	8	6	8	10	11	12	8	10	11	12	10	12	12		
	30	h	8	10				11	12	14	15							
		p	8	10	11	12	14	15	10	11	12	14	15	12	12	14	15	
	34	h	8	10				11	12	14	15							
		p	8	10	11	12	14	15	10	11	12	14	15	11	12	12	14	15

型号		D	L	L ₁	L ₂	A	M	锁紧扭矩 (N·m)	额定扭矩 (N·m)	最大扭矩 (N·m)	最高转速 (r/min)	惯性力矩 (kg·m ²)	静态扭转 刚性 (N·m/rad)	容许安装偏差			重量 (g)
代码														径向 (mm)	角向 (°)	轴向 (mm)	
标准型 CJZ11	15	23	2.15	6.5	5	M1.6	0.25	1.1	2.2	42000	2.6×10 ⁻⁷	110	0.15	1.5	±0.2		9
	19	26	2.65	7.7	6.5	M2	0.5	2.1	4.2	33000	7.6×10 ⁻⁷	240					15
	25	32	3.25	9.5	9	M2.5	1	4	8	25000	2.7×10 ⁻⁶	390					29
	30	36	4	11	11	M3	1.5	6.3	12.6	21000	6.3×10 ⁻⁶	590	0.2		±0.3		45
	34	38		12	12.25			8	16	18000	1.2×10 ⁻⁵	890					66



请按图示订货

■ CJZ11-D15-h3-p5

型号		h-p	
代码	D	h	p
标准型 CJZ11	15	3	5 6



交期Delivery

6 天

发货

○本产品发货时间不含周日

