



# ST 系列回拉式弹簧接线端子


代码	类型	颜色	安装方式	端子类型
JOTC51	回拉弹簧式	单层	黄绿色	DIN导轨
				接地型




ST-1.5  
厚度:4.2mm




ST1.5-2  
厚度:4.2mm

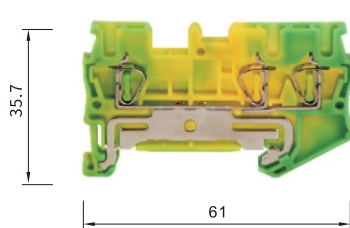


ST-2.5  
厚度:5.2mm




ST2.5-2  
厚度:5.2mm




ST2.5-4  
厚度:5.2mm

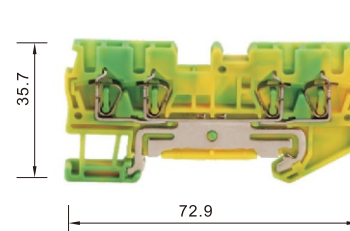


ST-4  
厚度:5.2mm




ST4-2  
厚度:6.2mm



ST4-4  
厚度:6.2mm

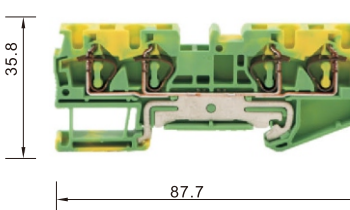


ST6  
厚度:8.2mm




ST6-3



ST-10  
厚度:5.2mm

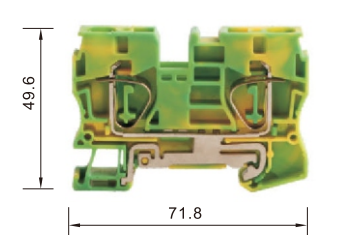

# ST 系列回拉式弹簧接线端子

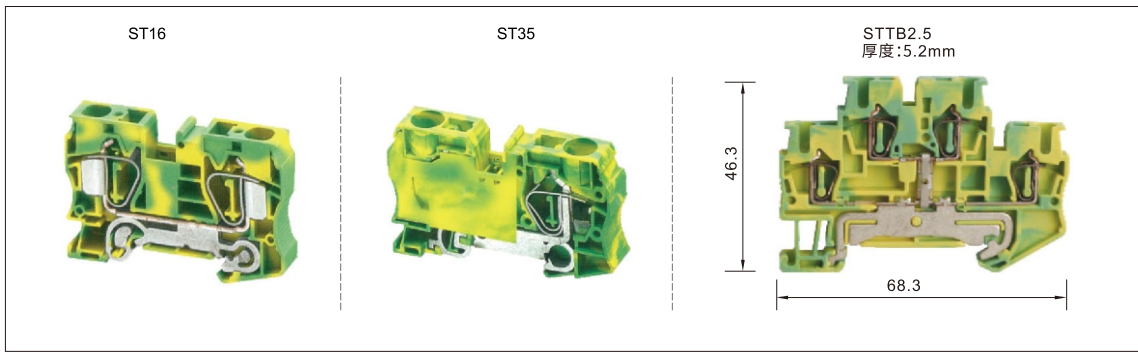

型号	ST1.5		ST1.5-2		ST2.5		WST2.5-2		ST2.5-4		ST4		
技术参数	IEC	UL	IEC	UL	IEC	UL	IEC	UL	IEC	UL	IEC	UL	
额定截面积	0.14-1.5	AWG26-16	0.14-1.5	AWG26-14	0.2-2.5	AWG26-12	0.2-2.5	AWG26-12	0.2-2.5	AWG26-12	0.2-4	AWG20-10	
额定冲击电压 污染等级/过压等级 材料级别	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	
绝缘材料/阻燃等级 根据UL94标准认证	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	
附件	挡板	D-ST-1.5		D-ST-1.5/3PE		D-ST-2.5/PE		D-ST-2.5/3PE		D-ST-2.5/4PE		D-ST-4/PE	
	快速标记条	ZB4		ZB4		ZB5		ZB5		ZB5		ZB6	
	固定件	E/UK		E/UK		E/UK		E/UK		E/UK		E/UK	
	螺丝刀 标准尺寸	0.4×2.5		0.4×2.5		0.6×3.5		0.6×3.5		0.6×3.5		0.6×3.5	

型号	ST4-2		ST4-4		WST6		ST-6-3		ST10		ST-16		
技术参数	IEC	UL	IEC	UL	IEC	UL	IEC	UL	IEC	UL	IEC	UL	
额定截面积	0.2-4	AWG20-10	0.2-6	AWG20-10	0.5-6	AWG20-8	0.5-6	/	10	AWG16-6	1.5-16	AWG16-4	
额定冲击电压 污染等级/过压等级 材料级别	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I	
绝缘材料/阻燃等级 根据UL94标准认证	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	PA66/V0	
附件	挡板	D-ST-4/3PE		D-ST-4/4PE		D-ST-6PE		D-ST-6/3PE		D-ST-10PE		D-ST-16PE	
	快速标记条	ZB6		ZB6		ZB8		ZB8		ZB10		ZB8	
	固定件	E/UK		E/UK		E/UK		E/UK		E/UK		E/UK	
	螺丝刀 标准尺寸	0.6×3.5		0.6×3.5		0.8×4.0		0.8×4.0		1.0×5.5		1.0×5.5	

型号	ST-35		STTB2.5	
技术参数	IEC	UL	IEC	UL
额定截面积	2.5-35	/	0.08-2.5	AWG28-12
额定冲击电压 污染等级/过压等级 材料级别	8/3/III/I	8/3/III/I	8/3/III/I	8/3/III/I
绝缘材料/阻燃等级 根据UL94标准认证	PA66/V0	PA66/V0	PA66/V0	PA66/V0

附件	挡板	D-ST-35PE	D-ST-2.5/2/2PE
	快速标记条	ZB10	FBS10/2/3-5-5
	固定件	E/UK	E/UK
	螺丝刀 标准尺寸	1.0×5.5	0.6×3.5



请按图示订货

## ■ JOTC51-ST-35

代码	型号	额定截面积
JOTC51	ST-35	6



交期Delivery

5天 发货

○ 本产品发货时间不含周日

弹簧  
端子  
13