


包胶凸轮随动器 ◀ 圆柱型·球面型




代码	类型	材质		衬层硬度	使用环境温度	附件
		衬层	随动器			
BCB21	圆柱型	聚氨酯	SUJ2	肖氏A90	80℃	六角螺帽
BCB22			SUS440C	肖氏A50		
BCB23			SUJ2	肖氏A90		
BCB31	球面型	聚氨酯	SUJ2	肖氏A90		
BCB32			SUS440C	肖氏A90		

圆柱型


BCB21/22/23
头部内六角孔(d5~10)
(带密封圈)




(无密封圈)



头部螺纹部内六角孔(d12~16)
(带密封圈)

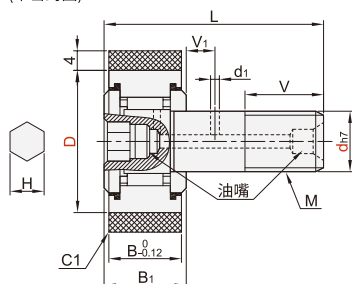


(无密封圈)




球面型


BCB31/32
头部内六角孔(d5~10)
(带密封圈)




(无密封圈)



头部螺纹部内六角孔(d12~16)
(带密封圈)

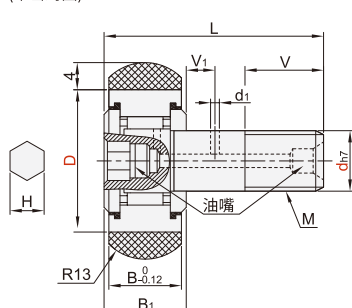

(无密封圈)



■d10以下规格没有润滑脂补充孔。

型号			D	密封圈	M	B	B1	L	d1	V	V1	H	容许负载 (N)	容许转速	
代码	dh7													肖氏A90	肖氏A50
圆柱型 BCB21	5	0	13	UU 带密封圈	M5x0.8	9	10	23	—	7.5	—	3	68	1500	250
	6	-0.012	16		M6x1	11	12	28		9		4	90	1300	220
	8	0	19		M8x1.25	11	12	32		11		5	95	1180	190
	10	-0.015	22		M10x1.25	12	13	36		13		6	110	1060	170
	12	0	30		M12x1.25	14	15	40		14		6	120	930	150
球面型 BCB31 BCB32	12	0	32	UU 带密封圈	M12x1.25	14	15	40	3	14	6	6	140	830	140
	16	-0.018	35		M16x1.5	18	19.5	52		18	8	6	150	800	130
	5	0	13		M5x0.8	9	10	23		7.5	—	3	68	1500	250
	6	-0.012	16		M6x1	11	12	28		9		4	90	1300	220
	8	0	19		M8x1.25	11	12	32		11		5	95	1180	190
圆柱型 BCB22 BCB23	10	-0.015	26	UU 带密封圈	M10x1.25	12	13	36	—	13		6	110	1060	170
	12	0	30		M12x1.25	14	15	40		14		6	120	930	150
	16	-0.018	35		M16x1.5	18	19.5	52		18		6	140	830	140
	5	0	13		M5x0.8	9	10	23		7.5		3	68	1500	250
	6	-0.012	16		M6x1	11	12	28		9		4	90	1300	220



请按图示订货

■BCB21-d5-D13-UU

型号		D	密封圈
代码	d		
BCB21	5	13	UU(带密封圈)



交期Delivery

3天

发货

○本产品发货时间不含周日

轴承/关节轴承 26

www.vipdo.cn 400-098-1117 工厂自动化零件一站式采购平台

汇集国内外知名品牌，让采购更便捷，让设计更高效！