


定位销 ◀ 二阶型 标准型



代码	类型		公差等级	材质		硬度	表面处理
				国标	相当		
MEK01	二阶型	标准型	Dm6	9CrWMn	SKS3	淬火硬度58~61HRC	/
MEK02			Dp6				

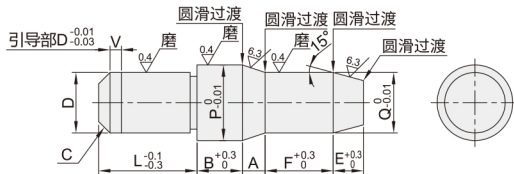

■ D尺寸公差

D	m6	p6
2-3	+0.008 +0.002	+0.012 +0.006
4-6	+0.012 +0.004	+0.020 +0.012
8-10	+0.015 +0.006	+0.024 +0.015
12-16	+0.018 +0.007	+0.029 +0.018
20	+0.021 +0.008	+0.035 +0.022

■ P<Q不适用

代码	型号	最小单位0.01		最小单位1	最小单位0.1			E	C	V
		D	P	Q	L	B	A			
Dm6 MEK01 Dp6 MEK02	2	2.00~4.00	1.00~3.00	2~8	2.0~6.0	1.0~3.0	2.0~6.0	1	0.3	0.5
	3	3.00~6.00	1.00~5.00	3~8	2.0~10.0	1.0~5.0	2.0~10.0	2	0.5	1.5
	4	4.00~7.00	2.00~6.00	4~10	2.0~15.0	1.0~8.0	2.0~15.0	3	1	
	5	5.00~8.00	2.00~7.00	5~12	2.0~20.0	1.0~10.0	2.0~20.0		1.5	
	6	6.00~10.00	2.00~9.00	6~15				2.0~20.0	2.0~20.0	2
	8	8.00~13.00	3.00~12.00	8~18	3.0~20.0		3.0~20.0	4		
	10	10.00~15.00	3.00~14.00	10~22			5.0~20.0	5.0~20.0	5	3
	12	12.00~16.00	5.00~15.00	12~26						
16	16.00~25.00	10.00~24.00	16~35							
20	20.00~30.00	13.00~29.00	20~42							

MEK01-D6-P8-Q8-L7-B6-A5-F3



型号	最小单位0.01		最小单位1	最小单位0.1			
代码	D	P	Q	L	B	A	F
MEK01	6	6.00~10.00	2.00~9.00	6~15	2.0~20.0	1.0~10.0	2.0~20.0



交期Delivery

5天

发货

○本产品发货时间不含周日