


定位销用衬套 ◀ 防脱落型·无肩型




代码	类型	公差等级	材质		硬度	表面处理
			国标	相当		
MEA01	无肩型	Dm6	T10(A)	SKS93	54~58HRC	/
MEA02						发黑
MEA03						无电镀锌镍
MEA04						/
MEA05						/
MEA11	无肩型	Dp6	T10(A)	SKS93	54~58HRC	/
MEA12						发黑
MEA13						无电镀锌镍
MEA14						/
MEA15						/

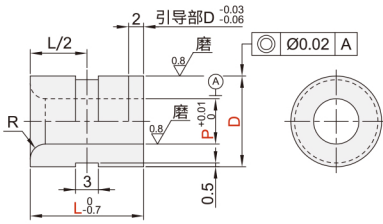

■可选追加工项

代码	技术说明
HA	变更防脱落部深度 选型方法 HA 变更防脱落部深度为1.0 ■ D<18不适用



代码	型号	D公差		最小单位0.01 P	最小单位0.1 L	R	
		m6	p6				
Dm6	8	+0.015	+0.024	4.00~4.50	10.0~15.0	1	
MEA01	10	+0.006	+0.015	4.00~6.50	10.0~22.0		
MEA02	12	+0.018	+0.029	6.00~8.50		10.0~42.0	2
MEA03	15						
MEA04	18						
MEA05	20						
Dp6	22	+0.021	+0.035	12.00~13.50			
MEA11	25			+0.022	13.00~15.50		
MEA12	26				15.00~16.50		
MEA13	30				16.00~20.50		
MEA14	35				+0.025	+0.042	20.00~25.00
MEA15		+0.009	+0.026				



请按图示订货

■ MEA01-D10-P5-L15

代码	型号	D公差		最小单位0.01 P	最小单位0.1 L
		m6	p6		
MEA01	10	+0.015 +0.006	+0.024 +0.015	4.00~6.50	10.0~22.0



交期Delivery

7天

发货

○本产品发货时间不含周日