

平皮带用惰轮 ◀ 直柱型 L=25-100




代码	类型	材质		表面处理
		国标	相当	
VBJ01	直柱型	无法兰型	LF2 A5052	本色阳极氧化
VBJ06		蓝色POM	蓝色POM	/
VBJ02		带法兰型	LF2 A5052	本色阳极氧化


■轴承精度：GB/T 307.1 0级
相当于：JIS B 1514 0级



无法兰型
VBJ01/06

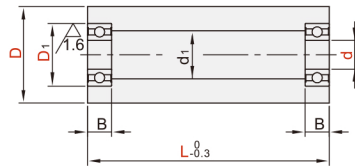

带法兰型
VBJ02

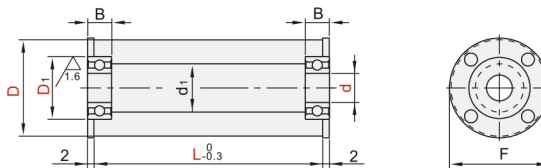

■轴承采用压入式。

■VBJ02Z总长为L+4。

■无法兰型

型号 代码	D	d	最小单位1 L	d1	轴承尺寸			
					型号	D1	B	
VBJ01 VBJ06	15	5	25-100	7	675ZZ	8	2.5	
		6		9	676ZZ	10	3	
	20	6		10	686ZZ	13	5	
		8		10	678ZZ	12	3.5	
	25	6		10	696ZZ	15	5	
		8			688ZZ	16		
	30	8		15	698ZZ	19	6	
		10			6900ZZ	22		
		12			6901ZZ	24		
	35	10		17	6900ZZ	22	6	
		12			6901ZZ	24		
		15			6902ZZ	28		7
	40	8		17	628ZZ	24	8	
					6000ZZ	26		
		10			6901ZZ	24	6	
		12			6902ZZ	28		
		20			22	6804ZZ	32	7
					17	6200ZZ	30	
	50	12		22	6001ZZ	28	8	
		15			6902ZZ	28		7
		20			6904ZZ	37		9
	25	6905ZZ		42				
	60	12		22	6201ZZ	32	10	
					6002ZZ	32		9
15		6904ZZ	37		9			
20		6905ZZ	42					
25		32	6906ZZ		47	9		
		30	6205ZZ		52		15	
80	25	41	6006ZZ	55	13			
	30		6907ZZ	55		10		
	35							

■带法兰型

型号 代码	D	d	最小单位1 L	d1	轴承尺寸			F	
					型号	D1	B		
VBJ02	25	6	25-100	10	696ZZ	15	5	26	
		8		15	698ZZ	19	6	31	
	30	10		17	6900ZZ	22	6	36	
		12			6901ZZ	24			
	40	8		17	628ZZ	24	8	41	
		10			6000ZZ	26			
		12			6901ZZ	24	6		
		15			6902ZZ	28	7		
	50	10		17	6200ZZ	30	9	51	
		12			6001ZZ	28			8
		15			6902ZZ	28			7
		20			6904ZZ	37			9
		25			6201ZZ	32			10
	60	15		22	6002ZZ	32	9	61	
		20			6904ZZ	37			
		25			6905ZZ	42	9		
		30			6906ZZ	47			
	80	25		41	6205ZZ	52	15	81	
		30			6006ZZ	55			13
		35			6907ZZ	55			10



请按图示订货

■ VBJ01-D15-d5-L50

型号		d	最小单位1 L
代码	D		
VBJ01	15	5	25-100



交期Delivery

6天

发货

○本产品发货时间不含周日