


小径内六角圆柱头螺钉 ◀ 短头小径内六角圆柱头螺钉/通孔型




代码	类型	材质	表面处理	硬度	强度等级
YWP11	小径内六角圆柱头螺钉	ML40Cr	发黑	22-32HRC	相当于8.8
YWP12		SUS304	/	/	A2-70
YWP13	短头小径内六角圆柱头螺钉	ML40Cr	发黑	22-32HRC	相当于8.8
YWP14		SUS304	/	/	A2-50
YWP17	通孔型	SUS304	/	/	A2-70


小径内六角圆柱头螺钉
YWP11/12

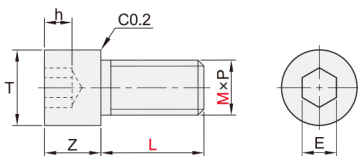

短头小径内六角圆柱头螺钉
YWP13/14

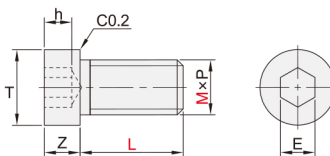

通孔型
YWP17

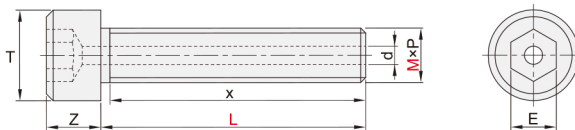

型号		L					P螺距	T	Z	E	h	
代码	M											
YWP11 YWP12	3	5	6	8	10		0.5	4.5	3	2.5	1.5	
	4	6	8	10	12		0.7	5.5	4	3	2	
	5	8	10	12	16		0.8	7	5	4	2.5	
	6	8	10	12	16		1	8.5	6	5	3	
	8	10	12	16	20		1.25	10	8	6	4	
	10	16	20	25	30		1.5	13	10	8	5	
YWP13 YWP14	3	5	6	8	10		0.5	4.5	2	2	1.5	
	4	6	8	10	12	16	20	0.7	5.5	2.8	2.5	2
	5	8	10	12	16	20		0.8	7	3.5	3	2.5
	6	8	10	12	16	20	25	1	8.5	4	4	3
	8	10	12	16	20	25	30	1.25	10	5	5	4
	10	16	20	25	30	35		1.5	13	6	6	4.5
12	20	25	30				1.75	16	7	8	5	

型号		L					d	X	P螺距	T	Z	E
代码	M											
通孔型 YWP17	3	6	8	10	12	16	20	全螺纹	0.5	5.5	3	2.5
	4	6	8	10	12	16	20		0.7	7	4	3
	5	8	10	12	16	20	25		0.8	8.5	5	4
	6	8	10	12	16	20	25		1	10	6	5
	8	12	16	20	25	30			1.25	13	8	6
	10	16	20	25	30				1.5	16	10	8



请按图示订货

■ YWP11 - M3-L5

型号		L	
代码	M		
YWP11	3	5	6 8 10



交期Delivery

3天 发货

○本产品发货时间不含周日

垫圈 / 吊环
螺母 / 螺母

33