


# 精密型/常规型真空吸盘组件

## 弹簧式侧面真空端口 弹簧式直接安装型




代码	类型	接管方式	吸盘材质	颜色
DSK24	弹簧式侧面真空端口	快速接头型	丁腈橡胶NBR	黑色
DSK25			导电性硅橡胶SE	
DSK26			氟橡胶F	灰色
DSK27			丁腈橡胶NBR	黑色
DSK28	导电性硅橡胶SE			
DSK29	弹簧式直接安装型	螺纹型	氟橡胶F	灰色

弹簧式侧面真空端口  
DSK24/DSK25/DSK26

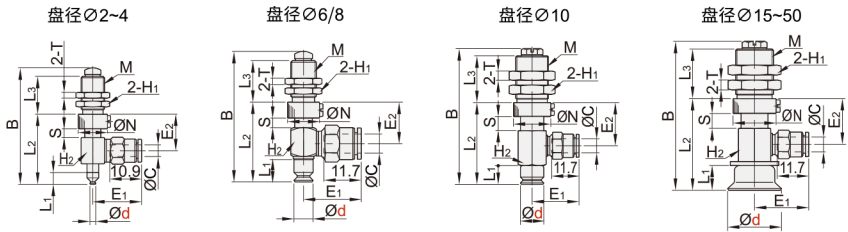

弹簧式直接安装型  
DSK27/DSK28/DSK29

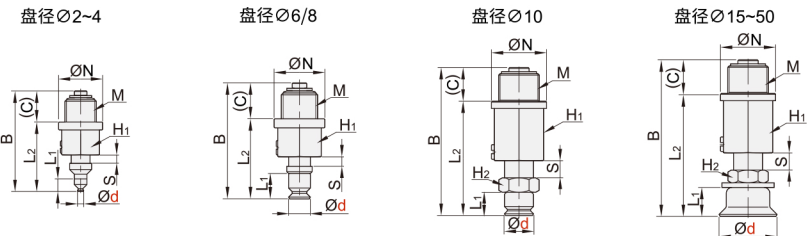

型号		B	C	M	L <sub>1</sub>	L <sub>2</sub>	L <sub>3</sub>	N	行程 S	E <sub>1</sub>	E <sub>2</sub>	对边H <sub>1</sub>	对边H <sub>2</sub>	T	最大负载 (N)	重量(g)
DSK24 DSK25 DSK26	2	40	4	M8×0.75	4	24	13	13	3	16.7	12.5	10	8	2	0.9-1.9	13.5
	3	40	4	M8×0.75	4	24	13	13	3	16.7	12.5	10	8	2	0.9-1.9	13.5
	4	40	4	M8×0.75	4	24	13	13	3	16.7	12.5	10	8	2	0.9-1.9	13.5
	6	41	6	M8×0.75	7	25	13	13	3	18.1	13	10	8	3	0.9-1.9	15.5
	8	39.5	6	M8×0.75	5.5	23.5	13	13	3	18.1	13	10	8	3	0.9-1.9	15.5
	10	58.1	6	M14×1.0	8	35	20	16	6	20.1	18.5	17	12	4	4.0-7.1	47.5
	15	59.1	6	M14×1.0	9	36	20	16	6	20.1	18.5	17	12	4	4.0-7.1	48
	20	60.1	6	M14×1.0	10	37	20	16	6	20.1	18.5	17	12	4	7.0-12.6	51.5
	25	61.1	6	M14×1.0	11	38	20	16	6	20.1	18.5	17	12	4	7.0-12.6	52
	30	61.1	6	M14×1.0	11	38	20	16	6	20.1	18.5	17	12	4	7.0-12.6	54
	40	64.1	6	M14×1.0	14	41	20	16	6	20.1	18.5	17	12	4	7.0-12.6	61
50	65.1	6	M14×1.0	15	42	20	16	6	20.1	18.5	17	12	4	7.0-12.6	67	

型号		B	M	C	L <sub>1</sub>	L <sub>2</sub>	N	行程 S	对边H <sub>1</sub>	对边H <sub>2</sub>	最大负载 (N)	重量(g)
DSK27 DSK28 DSK29	2	32	M10×1.0	9.5	4	22.5	14	3	8	/	2.3-3.9	14.5
	3	32	M10×1.0	9.5	4	22.5	14	3	8		2.3-3.9	14.5
	4	32	M10×1.0	9.5	4	22.5	14	3	8		2.3-3.9	14.5
	6	32	M10×1.0	9.5	7	22.5	14	3	12		2.3-3.9	14.5
	8	30.5	M10×1.0	9.5	5.5	21	14	3	12	2.3-3.9	14.5	
	10	51	M14×1.0	11.7	8	39.3	19	5.8	14	12	7.9-15.0	55.5
	15	52	M14×1.0	11.7	9	40.3	19	5.8	14		7.9-15.0	56
	20	54	M14×1.0	11.7	10	42.3	19	5.8	17		7.9-15.0	58.5
	25	55	M14×1.0	11.7	11	43.3	19	5.8	17		7.9-15.0	59
	30	55	M14×1.0	11.7	11	43.3	19	5.8	17		7.9-15.0	61
	40	58	M14×1.0	11.7	14	46.3	19	5.8	17		7.9-15.0	68
50	59	M14×1.0	11.7	15	47.3	19	5.8	17	7.9-15.0		74	



请按图示订货

### ■ DSK27-d15

代码	盘径d
DSK27	15



交期Delivery

5天

发货

○本产品发货时间不含周日