


标准型弹簧垫圈



代码	类型	材质	表面处理	适用标准	
YWT01	标准型弹簧垫圈	SWRH57	镀锌	DIN 127-1987	
YWT02		SUS304	/		
YWT13		65Mn (弹簧钢)	镀锌	GB/T 93-1987	
YWT14			发黑		
YWT15			SUS304		/
YWT16			SUS316		/

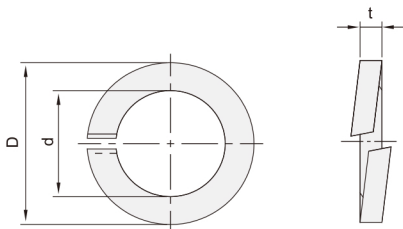

型号		D	d	t
YWT01 YWT02	2	4.4	2.1	0.5
	2.5	5.1	2.6	0.6
	3	6.2	3.1	0.8
	4	7.6	4.1	0.9
	5	9.2	5.1	1.2
	6	11.8	6.1	1.6
	8	14.8	8.1	2
	10	18.1	10.2	2.2
	12	21.1	12.2	2.5
	16	27.4	16.2	3.5
20	33.6	20.2	4	
24	40	24.5	5	
30	48.2	30.5	6	

型号		d	D	t	
SUS304 YWT15	1.6	1.8	3.4	0.8	
	2	2.35	3.51	0.58	
	2.5	2.85	4.31	0.73	
	3	3.4	5.2	0.9	
	4	4.4	6.8	1.2	
	5	5.4	8.2	1.4	
	6	6.68	10.08	1.7	
	8	8.68	13.08	2.2	
	SUS316 YWT16	10	10.9	16.4	2.75
		12	12.9	19.4	3.25
14		14.9	22.5	3.8	
16		16.9	25.5	4.3	
18		19.04	28.44	4.7	
20		21.04	31.44	5.2	
22		23.34	34.74	5.7	
24		25.5	37.9	6.2	
27		28.5	42.7	7.1	
30		31.5	47.1	7.8	
33	34.7	52.3	8.8		
36	37.7	56.3	9.3		

型号		d	D	t
弹簧钢 YWT13 YWT14	4	4.4	6.8	1.2
	5	5.4	8.2	1.4
	6	6.68	10.08	1.7
	8	8.68	13.08	2.2
	10	10.9	16.4	2.75
	12	12.9	19.4	3.25
	14	14.9	22.5	3.8
	16	16.9	25.5	4.3
	18	19.04	28.44	4.7
	20	21.04	31.44	5.2
	22	23.34	34.74	5.7
	24	25.5	37.9	6.2
	27	28.5	42.7	7.1
	30	31.5	47.1	7.8

垫圈 / 吊环
螺母 / 螺母
33



请按图示订货

YWT01-2

型号	
代码	公称直径
YWT01	2



交期 Delivery

3天 发货

○本产品发货时间不含周日



www.vipdo.cn



400-098-1117

工厂自动化零件一站式采购平台

汇集国内外知名品牌，让采购更便捷，让设计更高效！