

欧标40槽10系列


欧标40槽10系列

系列码	材质	表面处理
XCS01	A6063-T5	喷砂氧化
XCS03	A6063-T5	黑色氧化


■ 切断面未进行氧化处理
■ 长度范围：50~6000mm




槽口详图




XCS01-H4040
XCS03-H4040




XCS01-H4040C




XCS01-H4040E




XCS01-H4040F
XCS03-H4040F




XCS01-H4040R
XCS03-H4040R




XCS01-H4080

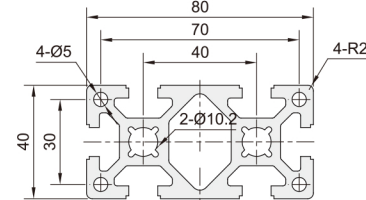


XCS01-H4080C

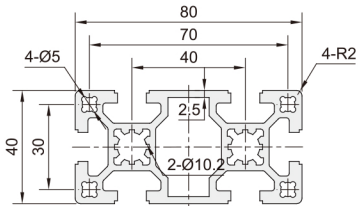


XCS01-H8080

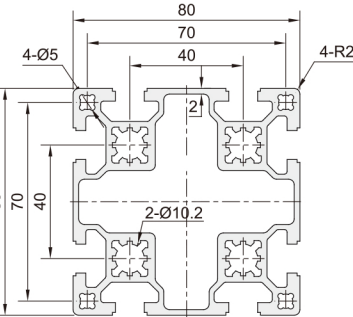

XCS01-H8080C

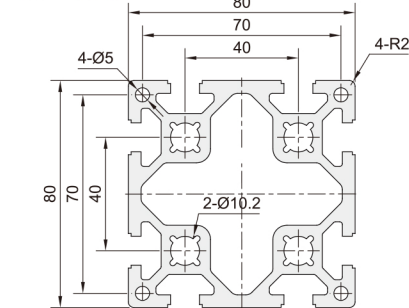

XCS01-H8840R

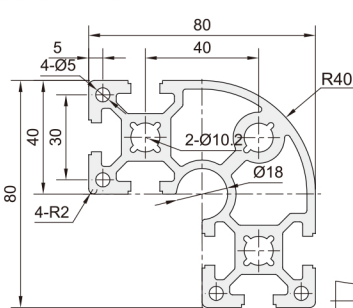

视图标准：第三视角

系列码	规格	L(mm)	槽宽类型	截面尺寸	重量(kg/m)	截面积(mm²)	截面惯性矩		抗弯截面模数	
							Ix(mm⁴)	Iy(mm⁴)	Wx(mm³)	Wy(mm³)
XCS01	H4040	50~6000	10	40×40	1.98	724.84	11.58×10⁴	11.58×10⁴	5792.15	5792.15
	H4040C				1.77	647.87	10.69×10⁴	10.69×10⁴	5346.25	5346.25
	H4040E				1.55	566.13	9.07×10⁴	9.07×10⁴	4534.00	4534.00
	H4040F				1.54	565.34	9.09×10⁴	9.09×10⁴	4543.50	4543.50
	H4040R				1.44	528.63	7.59×10⁴	7.59×10⁴	3410.66	3410.66
	H4080			40×80	3.61	1324.10	22.41×10⁴	81.28×10⁴	11206.10	20318.65
	H4080C				3.01	1324.10	19.21×10⁴	73.06×10⁴	3323.41	3320.92
	H8080				5.88	2153.30	151.28×10⁴	151.28×10⁴	37820.48	37820.48
	H8080C			80×80	4.66	1706.89	122.50×10⁴	122.50×10⁴	30623.68	30623.68
	H8840R				4.58	1676.82	94.11×10⁴	94.21×10⁴	21233.83	21247.60
XCS03	H4040			40×40	1.98	724.84	11.58×10⁴	11.58×10⁴	5792.15	5792.15
	H4040F				1.54	565.34	9.09×10⁴	9.09×10⁴	4543.50	4543.50
	H4040R				1.44	528.63	7.59×10⁴	7.59×10⁴	3410.66	3410.66

加工项目

指定方法	说明
LT (左面)	选型方法: LT/RT/DT
RT (右面)	 ■ Ø10.2通孔变更为螺孔M12深20.
DT (两面)	

加工项目指定方法，见订货范例。



请按图示订货

■ XCS01-H4040-L150-LT

系列码	规格	L(mm)	加工项目
XCS01	H4040	L150	LT



交期Delivery

5天

发货

○ 本产品发货时间不含周日